



movexii.com

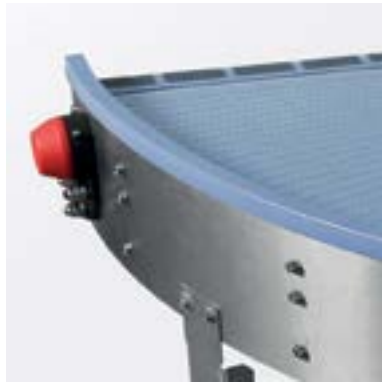


Metric Version  
**2019**

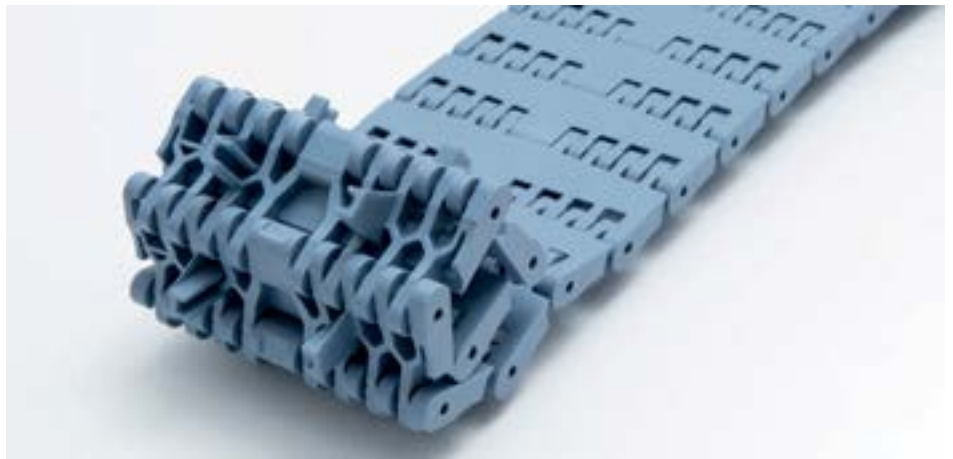

**Movex**<sup>®</sup>  
PRODUCT CATALOG

# Movex<sup>®</sup>


## Facts



PRODUCTION  
CAPACITY

**16.500 Mq<sup>2</sup>**  
OF PRODUCTION SPACE

REFERENCE YEAR 2018



WAREHOUSE  
CAPACITY

**>23.000** DIFFERENT  
PRODUCTS AVAILABLE

**>200** EMPLOYEES  
AROUND THE WORLD



### MISSION

Creating value through innovative development of ideas, supporting our partners with professionalism, flexibility and effectiveness.

### VISION

Reaching market leadership as a reliable and precise supplier. Planning the future without losing sight of our history and the values that allow our growth.

# WE CREATE SOLUTIONS



In the new headquarters **Movex** designs and manufactures high quality components for the food, beverage, packaging, automotive and automation industries.

**Movex** meets your needs for standard and custom products in a dynamic and responsive way ensuring the best performance product with an attractive market price.

# RESEARCH & DEVELOPMENT



The rich experience that **Movex** has acquired over the years shows that care and innovation of products are essential to guarantee constant quality.

Thanks to the investments as well as developing strategic departments **Movex** has created new space where research and innovation become concrete tools to satisfy customers' requirements.

# WE SUPPORT YOU



A top service level is the goal of a qualified Engineering and Sales team with the objective of presenting **Movex** as a supplier of excellence to all clients.

Through a distribution/network which spans the globe, **Movex** offers technical support and a careful after-sales service, always at your disposal.

# CONTACT US



## Movex S.p.A.

Via Industria, 22 - 24060 Castelli Calepio (BG)

P +39 035 8359711 | F +39 035 4420873 | [info@movexii.com](mailto:info@movexii.com)

## Movex around the world



## Movex GmbH

P +49-6204-9375-0



## Movex AG India

P +91-120-4159660-62



## Movex USA Inc.

P +1-919-274-5477



## Movex Brasil Ltda

P +55-15-3141-2550



## Movex UK Ltd.

P +44-77-20678442



## Movex SA de CV

P +52-1-3318458187



## Movex France

P +33-0640592049



## Movex Nederland

P +31-630-994850



## Movex Russia

P +7 (495) 925-88-56



## Movex Ukraine


P +380-667507756

# ***Movex***<sup>®</sup> ***is online!***

*Always connected.*

*Consult our catalog  
from your favorite  
device and request  
a free quotation.*

**[www.movexii.com](http://www.movexii.com)**



RESPONSIVE



# ***Movex***<sup>®</sup> ***is App!***



*Stay updated  
on our latest news.*

*Discover more about us  
and our products.*

***Download it free today  
from the App store!***



**Movex**

# PFX

**The best choice for dry running applications.**

**PFX** is a plastic compound developed specific for chain and belts in order to run with limited lubrication or in dry applications where the demands are extreme concerning speed, performance & efficiency.

**PFX** material is developed to reduce the friction between chain, product and wearstrips even if no lubrication is used.

## Modular belts available:


Other different types of product in PFX are on request.



**520 FT**



**520 HD FT**



**520 PRO LBP**




**525 HD FT**



**525 HD FG**



**550 FT &  
One track belt**



**550 FG &  
One track belt**




**550 PRO FT**



**550 PRO M**



**551 FT**



**551 PRO LBP**



**260 M FT**



**260 M FG**



**260 TAB**



### Low friction

Developed to reduce friction between chain and product, and chain and wearstrip.



### High performance

Longer wear life lead to excellent and long enduring product handling features.



### Minimal dusting

Developed to avoid dusting under extreme circumstances.



### Control of cost

Better control of total cost and sustainable conveyor technology.



### Food contact Certified

PFX material is suitable in food application.



### Patented material

PFX is an exclusive product of Movex.


Energy saving

Low friction

Improved safe  
condition

High visibility

High efficiency

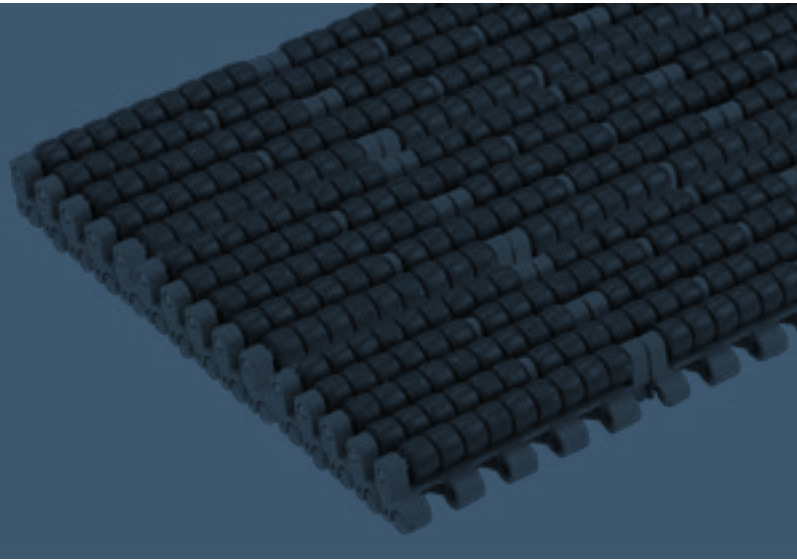


**510**



**510 FT**  
Pag 176

**520**



**520 FT**  
Pag 178

**520 HD FT**  
Pag 179

**520 FTT**  
Pag 180

**520 FG**  
Pag 181

**520 GT**  
Pag 182

**520 LBP**  
Pag 183

**520 PRO LBP**  
Pag 184


**520 M**  
Pag 185

**521**



**521 FT**  
Pag 187

**228 Transfer plate**



**228 One Piece with Rollers**  
Pag 189

**228 One Piece with Bearings**  
Pag 190

**228 Standard**  
Pag 191


**228 with Rollers**  
Pag 191

**228 with Bearings**  
Pag 192

**228 with Positioner and Bearings**  
Pag 193

**228 for Micropitch**  
Pag 193

**590**



**590 FT**  
Pag 195

**590 FT One track Belt**  
Pag 196

**590 FTT**  
Pag 197

**525**



**525 HD FT**  
Pag 199

**525 HD FT + RIB**  
Pag 200


**525 FTT**  
Pag 201

**525 HD FG**  
Pag 202

**525 HD GT**  
Pag 203

**525 HD GT Side indent**  
Pag 204

**530**



**530 FT**  
Pag 206

**530 FTT**  
Pag 207

**530 GT**  
Pag 208

**530 GT Side indent**  
Pag 209

**530 LBP**  
Pag 210

**550**



**550 FT**  
Pag 212

**550 FT One track Belt**  
Pag 213

**550 FTT**  
Pag 214

**550 FG**  
Pag 215

**550 FG One track Belt**  
Pag 216


**550 GT**  
Pag 217

**550 GT Side indent**  
Pag 218

**550 PRO FT**  
Pag 219

**550 PRO M**  
Pag 220

**551**



**551 FT**  
Pag 222

**551 FTT**  
Pag 223

**551 GT**  
Pag 224

**551 GT Side indent**  
Pag 225

**551 LBP**  
Pag 226

**551 PRO LBP**  
Pag 227/228

**552**



**552 FT**  
Pag 230

**552 FT One track Belt**  
Pag 231

**552 FTT**  
Pag 232


**552 PT**  
Pag 233

**552 PT One track Belt**  
Pag 234

**552 GT**  
Pag 235


**552 GT Side indent**  
Pag 236

**556**



**556 FT**  
Pag 238

**556 GT**  
Pag 239

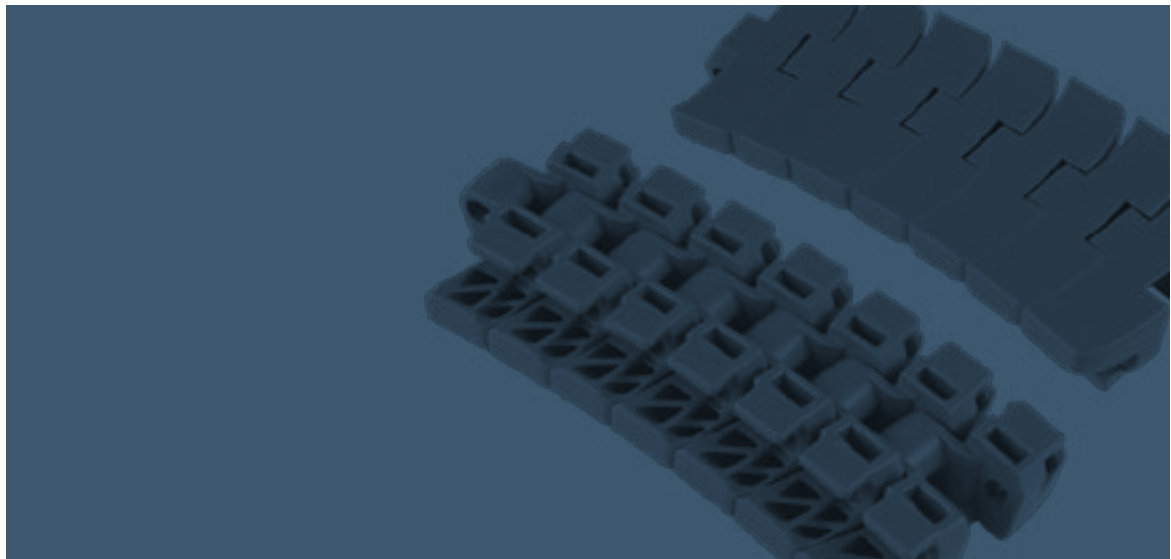

**600**



**600 Standard**  
Pag 241

**600 Heavy duty**  
Pag 242

**600 Heavy duty with Bearings**  
Pag 243

**600 Small radius**  
Pag 244

**600 Heavy duty/ Small radius**  
Pag 245

**600 Heavy duty/ Small radius with Bearings**  
Pag 246

**600 with pusher**  
Pag 247

**1047 Heavy duty guide**  
Pag 247

**500**



**500 RR**  
Pag 249


**389**



**389 Combs**  
Pag 250



**ZERO CONTACT**  
Pag 252



**ZERO CONTACT PRO**  
Pag 253/254/255



**ZERO CONTACT CURVE**  
Pag 256/257/258

**260**



**260 M FT**  
Pag 260

**260 M FG**  
Pag 261

**260 TAB**  
Pag 262

**261**



**261 M FT**  
Pag 263

**261 TAB**  
Pag 264

# 510 Series

# 510

Pitch 8 mm  
H= 6 mm



510 FT

**Movex**<sup>®</sup>



# 510 FT

Tappeti modulari / Modular belts / Mattenketten




Imperial Size

## 510 FT

Tappeto Modulare 510 FT, H=6 M=3"  
Modular Belt Series 510 FT, H=6 M=3" / Modulare Mattenkette 510 FT, H=6 M=3"

**Patented**

CODE STRUCTURE GUIDE			
(Example)			
<b>5331</b>	<b>01</b>	<b>0012</b>	<b>A</b>
Series	*Material	Width	Version

		
pg. 266	pg. 516->524	pg. 482



**8 mm**  
PITCH

### \*Material

#### LFA - Code 01

Low friction Acetal


**Max w. load:** 3000 N/m  
**Weight:** 5,8 kg/m<sup>2</sup>  
**Temp. range:** dry -40+80 °C  
wet -40+65 °C  
**Pin material:** PBT white

#### MX - Code 03

Performance PBT


**Max w. load:** 2700 N/m  
**Weight:** 5,5 kg/m<sup>2</sup>  
**Temp. range:** dry -40+120 °C  
wet -40+60 °C  
**Pin material:** POM grey

### Version A - Standard

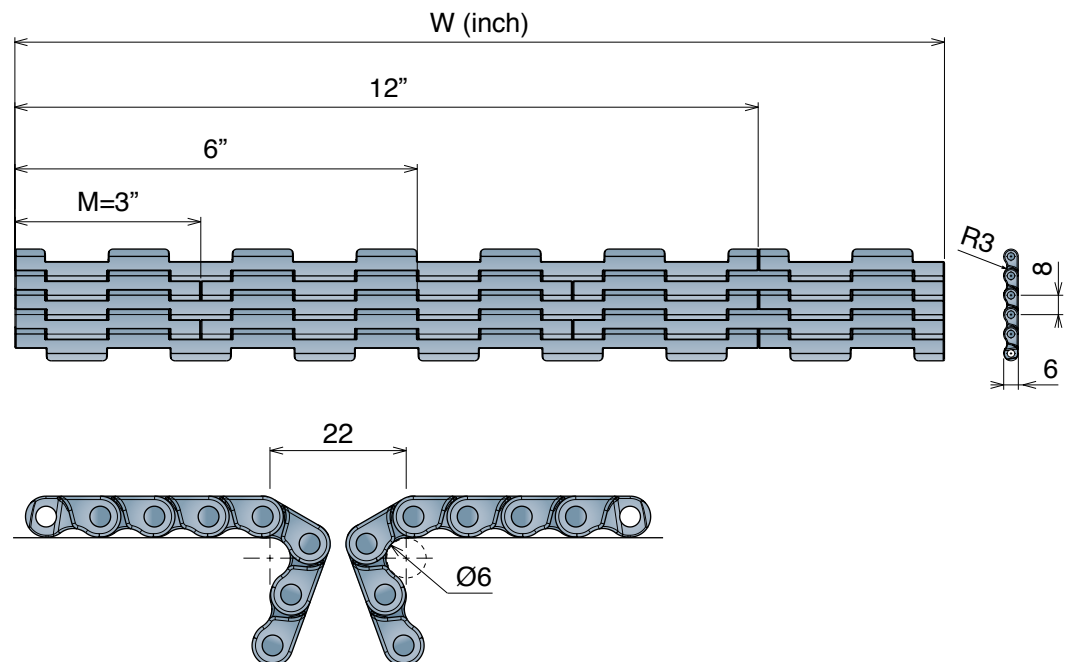

### Version A - Standard

Series	Material	Width	Version
5331	*	0003	A
5331	*	0006	A
5331	*	0009	A
5331	*	0012	A
5331	*	0015	A
5331	*	0018	A
5331	*	0021	A
5331	*	0024	A
5331	*	0027	A
5331	*	0030	A
5331	*	0033	A
5331	*	0036	A
5331	*	0039	A
5331	*	0042	A
5331	*	0045	A
5331	*	0048	A

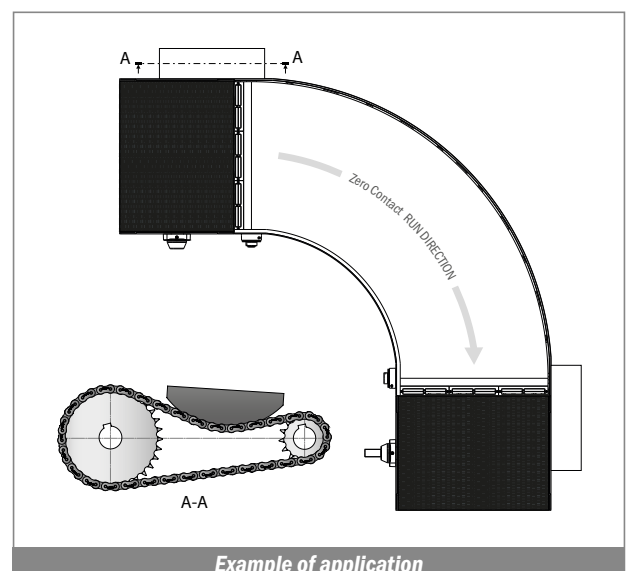


Example of application

Tappeti modulari / Modular belts / Mattenketten

# 520

Pitch 12,7 mm

H= 8,7 mm

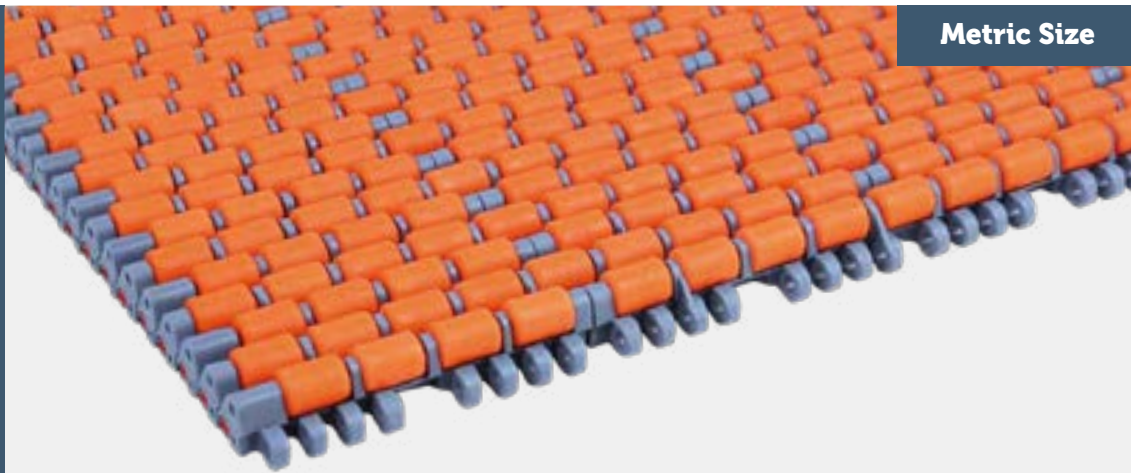

520 FT

520 HD FT

520 FTT

520 FG

520 GT

520 LBP

520 PRO LBP

520 M

**Movex**<sup>®</sup>


## 520 FT

Tappeto Modulare 520 FT, H=8,7 M=85  
 Modular Belt Series 520 FT, H=8,7 M=85 / Modulare Mattenkette 520 FT, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5201	03	0340	C
Series	*Material	Width	Version

Backflex radius min.: 10 mm

**12.7 mm**  
PITCH




pg. 269-270

pg. 516->524

pg. 483

**Reinforced positioner**

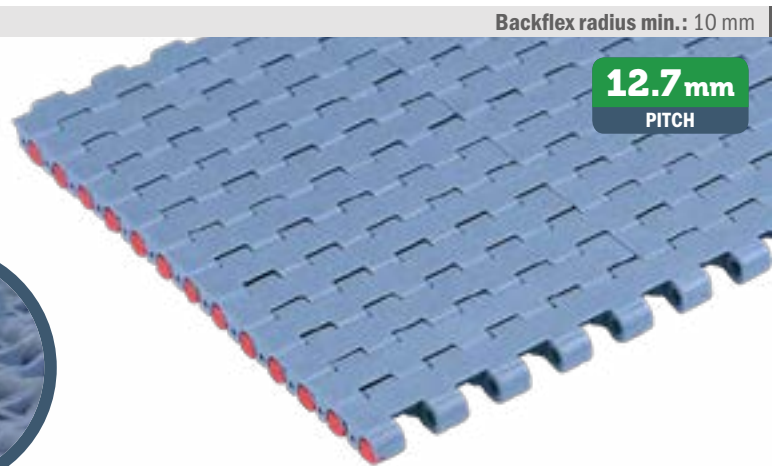

**\*Material**

**LFA - Code 01**  
Low friction Acetal

Easy Delivery

Max w. load: 21500 N/m  
 Weight: 7,8 kg/m<sup>2</sup>  
 Temp. range dry: -40+80 °C  
 Temp. range wet: -40+65 °C  
 Pin material: PBT white

**MX - Code 03**  
Performance PBT

Max w. load: 17500 N/m  
 Weight: 7,5 kg/m<sup>2</sup>  
 Temp. range dry: -40+120 °C  
 Temp. range wet: -40+60 °C  
 Pin material: POM grey

**MPX - Code 25**  
Lubricated Acetal


Max w. load: 21500 N/m  
 Weight: 7,8 kg/m<sup>2</sup>  
 Temp. range dry: -40+80 °C  
 Temp. range wet: -40+65 °C  
 Pin material: PBT white

**PFX - Code 30**  
Extra performance PBT


Max w. load: 17500 N/m  
 Weight: 7,5 kg/m<sup>2</sup>  
 Temp. range dry: -40+120 °C  
 Temp. range wet: -40+60 °C  
 Pin material: POM grey

**THE BEST CHOICE FOR DRY RUNNING APPLICATIONS**


**Version A - Standard**

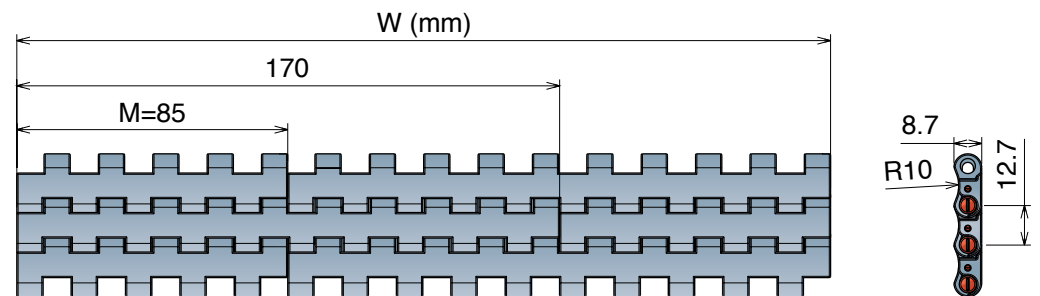

**Version B - With 1 Positioner**

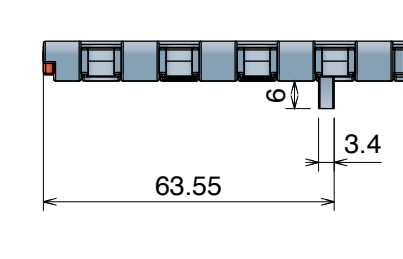

**Version C - With 2 Positioners**

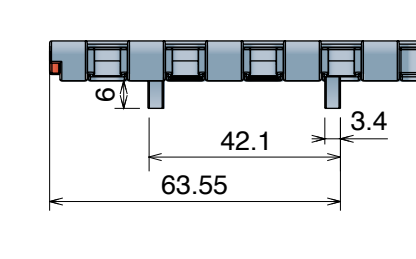

**Version A - Standard**

Series	Material	Width	Version
5201	*	0085	A
5201	*	0170	A
5201	*	0255	A
5201	*	0340	A
5201	*	0425	A
5201	*	0510	A
5201	*	0595	A
5201	*	0680	A
5201	*	0765	A
5201	*	0850	A
5201	*	0935	A
5201	*	1020	A
5201	*	1105	A
5201	*	1190	A
5201	*	1275	A
5201	*	1360	A
5201	*	1445	A
5201	*	1530	A

**Version B - With 1 Positioner**

Series	Material	Width	Version
5201	*	0085	B
5201	*	0170	B
5201	*	0255	B
5201	*	0340	B
5201	*	0425	B
5201	*	0510	B
5201	*	0595	B
5201	*	0680	B
5201	*	0765	B
5201	*	0850	B
5201	*	0935	B
5201	*	1020	B
5201	*	1105	B
5201	*	1190	B
5201	*	1275	B
5201	*	1360	B
5201	*	1445	B
5201	*	1530	B

**Version C - With 2 Positioners**

Series	Material	Width	Version
5201	*	0085	C
5201	*	0170	C
5201	*	0255	C
5201	*	0340	C
5201	*	0425	C
5201	*	0510	C
5201	*	0595	C
5201	*	0680	C
5201	*	0765	C
5201	*	0850	C
5201	*	0935	C
5201	*	1020	C
5201	*	1105	C
5201	*	1190	C
5201	*	1275	C
5201	*	1360	C
5201	*	1445	C
5201	*	1530	C




## 520 HD FT


Tappeto Modulare 520 HD, H=8,7 M=85  
 Modular Belt Series 520 HD, H=8,7 M=85 / Modulare Mattenkette 520 HD, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5211	03	0340	C
Series	*Material	Width	Version

Backflex radius min.: 10 mm

**12.7mm**  
PITCH

 pg. 267-268	 pg. 516->524	 pg. 482
--	--	---



Metric Size

**\*Material**  
**LFA - Code 01**  
 Low friction Acetal  
 Easy Delivery

Max w. load: 25500 N/m  
 Weight: 7,8 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

**MX - Code 03**  
 Performance PBT

Max w. load: 20000 N/m  
 Weight: 7,5 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

**MPX - Code 25**  
 Lubricated Acetal


Max w. load: 25000 N/m  
 Weight: 7,8 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

**PFX - Code 30**  
 Extra performance PBT


Max w. load: 20000 N/m  
 Weight: 7,5 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

**THE BEST CHOICE FOR DRY RUNNING APPLICATIONS**


### Version A - Standard

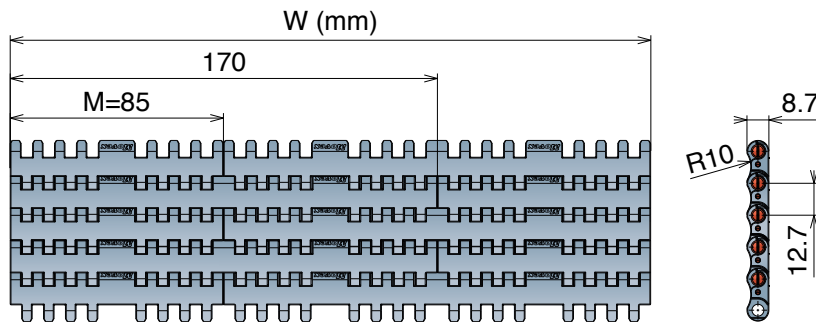

### Version B - With 1 Positioner

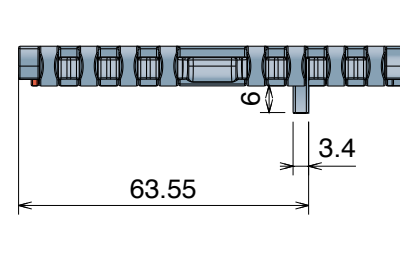

### Version C - With 2 Positioner

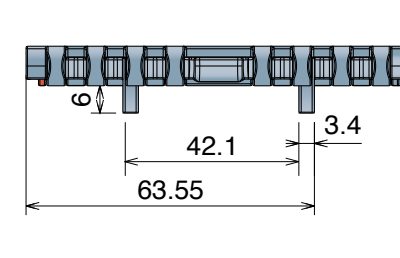

### Version A - Standard

Series	Material	Width	Version
5211	*	0085	A
5211	*	0170	A
5211	*	0255	A
5211	*	0340	A
5211	*	0425	A
5211	*	0510	A
5211	*	0595	A
5211	*	0680	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5211	*	0085	B
5211	*	0170	B
5211	*	0255	B
5211	*	0340	B
5211	*	0425	B
5211	*	0510	B
5211	*	0595	B
5211	*	0680	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5211	*	0085	C
5211	*	0170	C
5211	*	0255	C
5211	*	0340	C
5211	*	0425	C
5211	*	0510	C
5211	*	0595	C
5211	*	0680	C

## Advantages:

- ▶ Improved working load
- ▶ Easy installation
- ▶ Rigidity
- ▶ Product stability

## 520 FTT


Tappeto Modulare 520 FTT, H=8,7 M=85

Modular Belt Series 520 FTT, H=8,7 M=85 / Modulare Mattenkette 520 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5206	01	0170	CN
Series	*Material	Width	Version

Backflex radius min.: 10 mm


**12.7 mm**  
PITCH



pg. 269-270

pg. 516->524

pg. 483

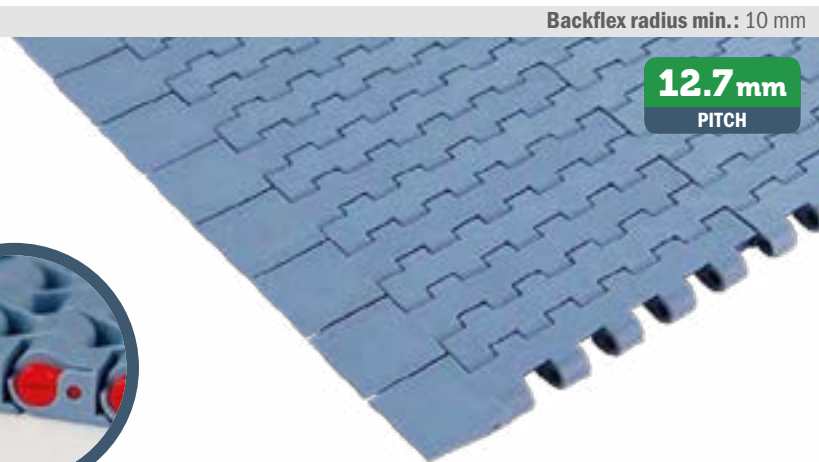

### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 21500 N/m  
Weight: 7,8 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

#### PP - Code 02

Polypropylene

Max w. load: 13000 N/m  
Weight: 7,5 kg/m<sup>2</sup>  
Temp. range dry: 4÷80 °C  
Temp. range wet: 4÷65 °C  
Pin material: PP blu

#### MX - Code 03

Performance PBT

Max w. load: 17500 N/m  
Weight: 7,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: 40÷60 °C  
Pin material: POM grey

#### DKM - Code 16

Aramide Reinforced Acetal

Max w. load: 21500 N/m  
Weight: 7,8 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

#### MWX - Code 17

Polyamide Composite


Max w. load: 21500 N/m  
Weight: 7,8 kg/m<sup>2</sup>  
Temp. range dry: -40÷104 °C  
Temp. range wet: NR  
Pin material: PBT white

#### MPX - Code 25


Lubricated Acetal

Max w. load: 21500 N/m  
Weight: 7,8 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

### Version C

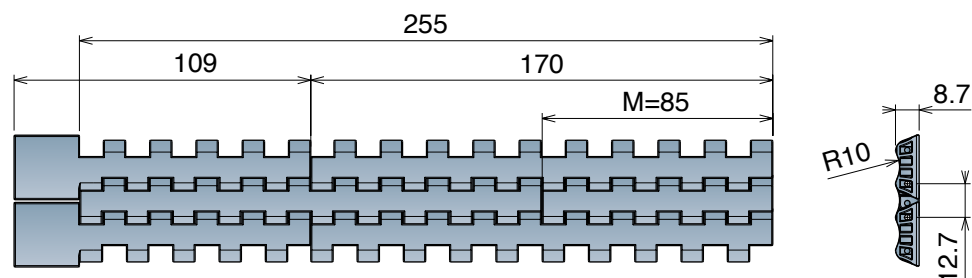

### Version CN - Near

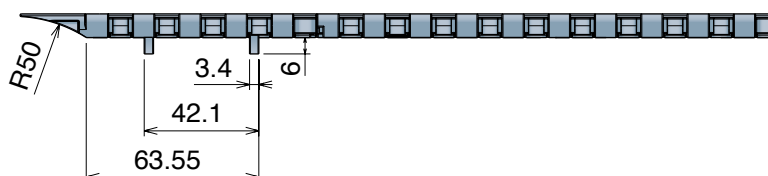

### Version C0 - Opposite



### Version C

Series	Material	Width	Version
5206	*	0085	C

### Version CN - Near

Series	Material	Width	Version
5206	*	0170	CN
5206	*	0255	CN

### Version C0 - Opposite

Series	Material	Width	Version
5206	*	0170	C0
5206	*	0255	C0

On request available with bigger/different width

## 520 FG Open Surface 25% Tappeto Modulare 520 FG, H=8,7 M=85 Modular Belt Series 520 FG, H=8,7 M=85 / Modulare Mattenkette 520 FG, H=8,7 M=85

### CODE STRUCTURE GUIDE




(Example)


<b>5202</b>	<b>01</b>	<b>0765</b>	<b>A</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 10 mm

**12.7mm**  
PITCH

Metric Size

 pg. 269-270	 pg. 516->524	 pg. 483
---	--	---

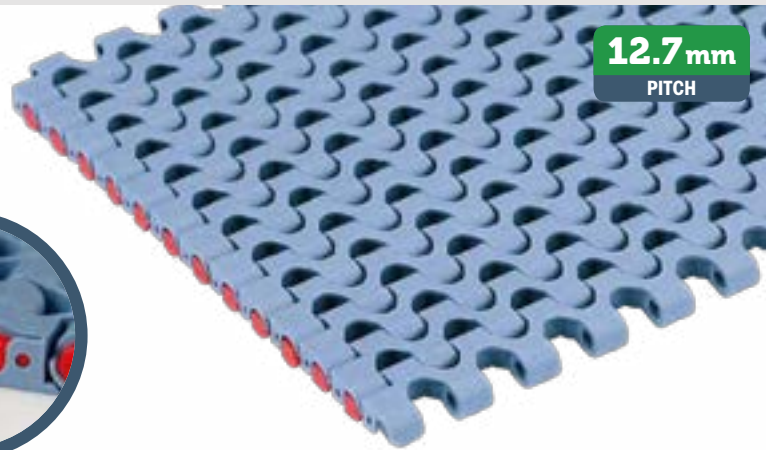

\*Material

### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 21500 N/m  
Weight: 7,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

### PP - Code 02

Polypropylene

Max w. load: 13000 N/m  
Weight: 7,5 kg/m<sup>2</sup>  
Temp. range dry: 4+80 °C  
Temp. range wet: 4+65 °C  
Pin material: PP blu

### MX - Code 03

Performance PBT

Max w. load: 17500 N/m  
Weight: 7,2 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey

### DKM - Code 16

Aramid Reinforced Acetal

Max w. load: 21500 N/m  
Weight: 7,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

### MWX - Code 17

Polyamide Composite


Max w. load: 21500 N/m  
Weight: 7,8 kg/m<sup>2</sup>  
Temp. range dry: -40+104 °C  
Temp. range wet: NR  
Pin material: PBT white

### MPX - Code 25


Lubricated Acetal

Max w. load: 21500 N/m  
Weight: 7,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white


Version A - Standard

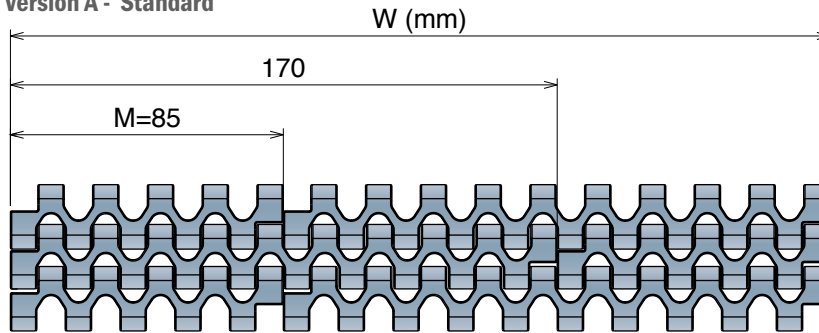

Version B - With 1 Positioner

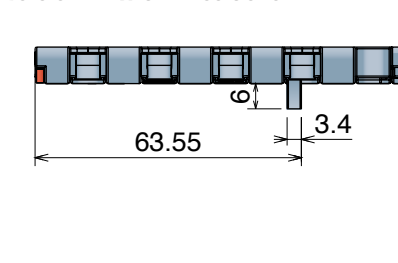

Version C - With 2 Positioner

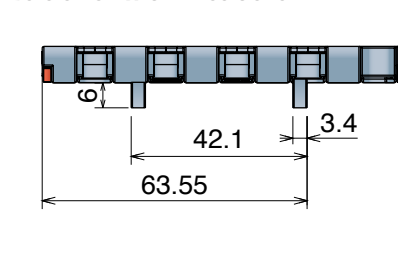

Version A - Standard

Series	Material	Width	Version
5202	*	0085	A
5202	*	0170	A
5202	*	0255	A
5202	*	0340	A
5202	*	0425	A
5202	*	0510	A
5202	*	0595	A
5202	*	0680	A
5202	*	0765	A
5202	*	0850	A
5202	*	0935	A
5202	*	1020	A
5202	*	1105	A
5202	*	1190	A
5202	*	1275	A
5202	*	1360	A
5202	*	1445	A
5202	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5202	*	0085	B
5202	*	0170	B
5202	*	0255	B
5202	*	0340	B
5202	*	0425	B
5202	*	0510	B
5202	*	0595	B
5202	*	0680	B
5202	*	0765	B
5202	*	0850	B
5202	*	0935	B
5202	*	1020	B
5202	*	1105	B
5202	*	1190	B
5202	*	1275	B
5202	*	1360	B
5202	*	1445	B
5202	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5202	*	0085	C
5202	*	0170	C
5202	*	0255	C
5202	*	0340	C
5202	*	0425	C
5202	*	0510	C
5202	*	0595	C
5202	*	0680	C
5202	*	0765	C
5202	*	0850	C
5202	*	0935	C
5202	*	1020	C
5202	*	1105	C
5202	*	1190	C
5202	*	1275	C
5202	*	1360	C
5202	*	1445	C
5202	*	1530	C

## 520 GT

Tappeto Modulare 520 GT, H=8,7 M=85  
 Modular Belt Series 520 GT, H=8,7 M=85 / Modulare Mattenkette 520 GT, H=8,7 M=85



### CODE STRUCTURE GUIDE

(Example)

<b>5203</b>	<b>02</b>	<b>0510</b>	<b>B-S</b>
Series	*Material	Width	Version

Backflex radius min.: 20 mm

**12.7 mm**  
PITCH

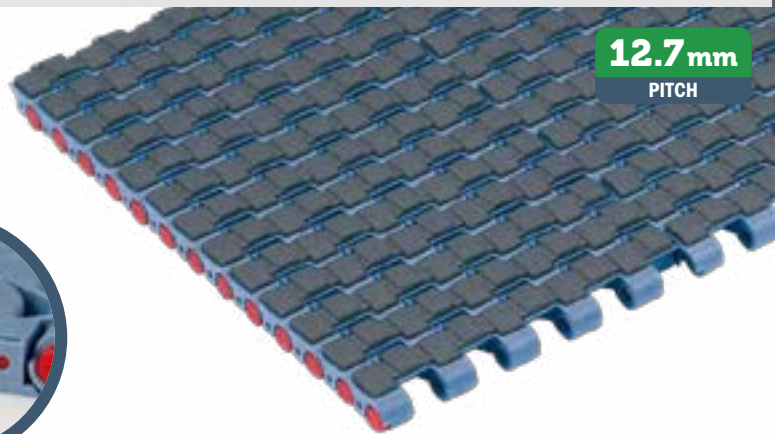

### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 21500 N/m  
 Weight: 9,0 kg/m<sup>2</sup>  
 Temp. range dry: -40+80 °C  
 Temp. range wet: -40+65 °C  
 Pin material: PBT white  
 Hardness of Grip top Rubber: 50 ShA

#### PP - Code 02

Polypropylene


Max w. load: 13000 N/m  
 Weight: 7,5 kg/m<sup>2</sup>  
 Temp. range dry: 4+80 °C  
 Temp. range wet: 4+65 °C  
 Pin material: PP blu  
 Hardness of Grip top Rubber: 50 ShA

#### MX - Code 03


Performance PBT

Max w. load: 17500 N/m  
 Weight: 9,3 kg/m<sup>2</sup>  
 Temp. range dry: -40+120 °C  
 Temp. range wet: -40+60 °C  
 Pin material: POM grey  
 Hardness of Grip top Rubber: 50 ShA


### Version A - Standard

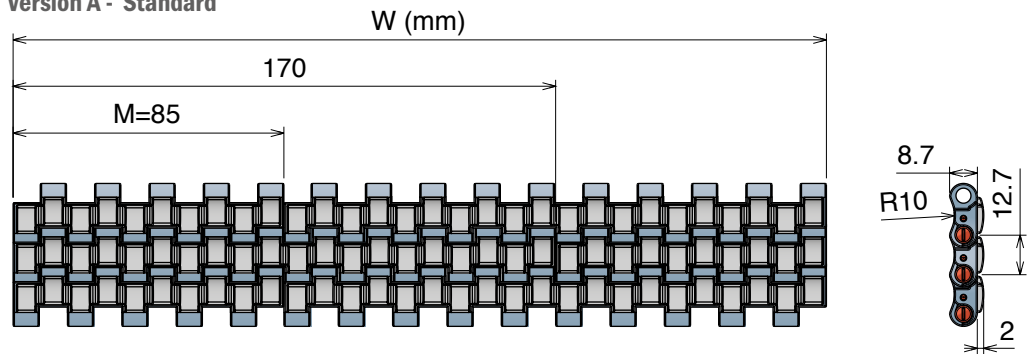

### Version B - With 1 Positioner

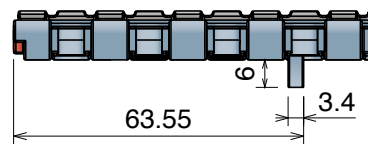

### Version C - With 2 Positioners

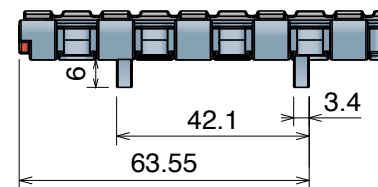

### Version A - Standard

Series	Material	Width	Version
5203	*	0085	A
5203	*	0170	A
5203	*	0255	A
5203	*	0340	A
5203	*	0425	A
5203	*	0510	A
5203	*	0595	A
5203	*	0680	A
5203	*	0765	A
5203	*	0850	A
5203	*	0935	A
5203	*	1020	A
5203	*	1105	A
5203	*	1190	A
5203	*	1275	A
5203	*	1360	A
5203	*	1445	A
5203	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5203	*	0085	B
5203	*	0170	B
5203	*	0255	B
5203	*	0340	B
5203	*	0425	B
5203	*	0510	B
5203	*	0595	B
5203	*	0680	B
5203	*	0765	B
5203	*	0850	B
5203	*	0935	B
5203	*	1020	B
5203	*	1105	B
5203	*	1190	B
5203	*	1275	B
5203	*	1360	B
5203	*	1445	B
5203	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5203	*	0085	C
5203	*	0170	C
5203	*	0255	C
5203	*	0340	C
5203	*	0425	C
5203	*	0510	C
5203	*	0595	C
5203	*	0680	C
5203	*	0765	C
5203	*	0850	C
5203	*	0935	C
5203	*	1020	C
5203	*	1105	C
5203	*	1190	C
5203	*	1275	C
5203	*	1360	C
5203	*	1445	C
5203	*	1530	C

# 520 LBP

Tappeto Modulare 520 LBP, H=8,7 M=85

Modular Belt Series 520 LBP, H=8,7 M=85 / Modulare Mattenkette 520 LBP, H=8,7 M=85


### CODE STRUCTURE GUIDE




(Example)

5204	01	1530	C
Series	*Material	Width	Version

Backflex radius min.: 65 mm

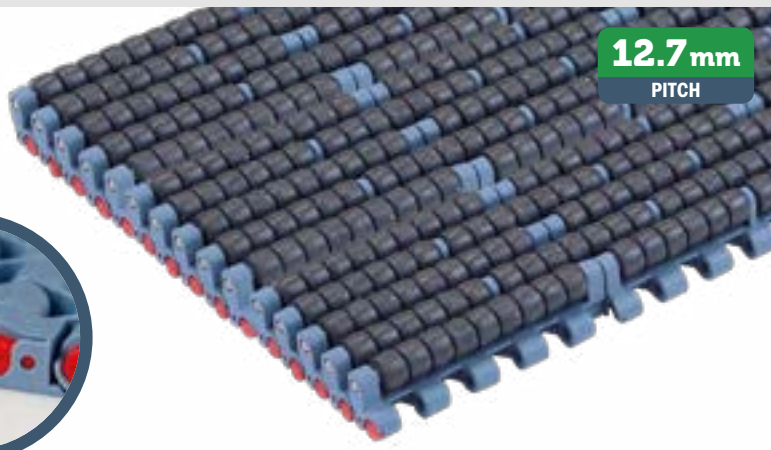
**12.7mm**  
PITCH



 pg. 269-270	 pg. 516->524	 pg. 483
---	--	---

Metric Size

### Version A - Standard

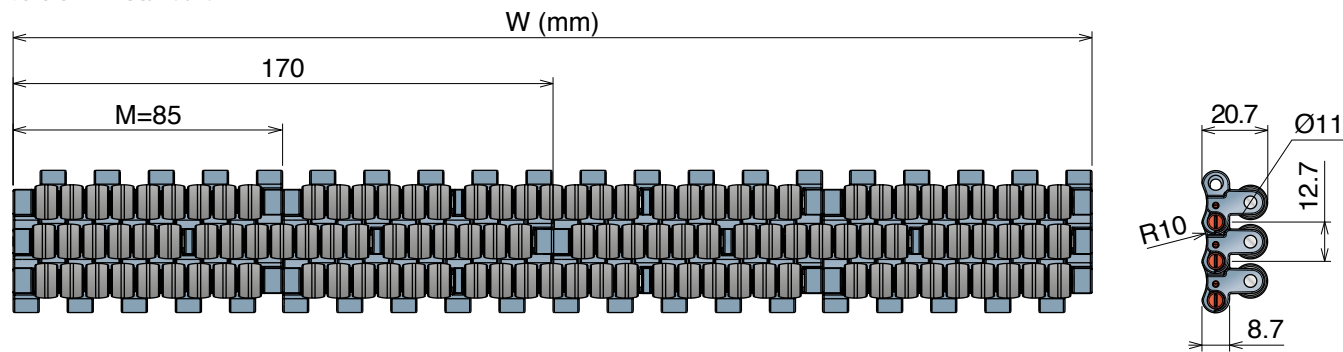


### \*Material

### LFA - Code 01


Low friction Acetal

Max w. load: 21500 N/m  
Weight: 24,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: 1÷65 °C  
Pin material: PBT white

### Version B - With 1 Positioner

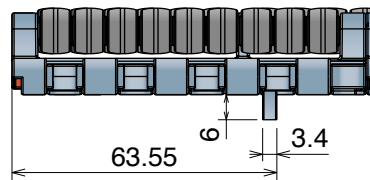

### Version C - With 2 Positioner

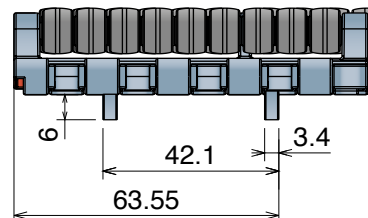

### Version A - Standard

Series	Material	Width	Version
5204	*	0085	A
5204	*	0170	A
5204	*	0255	A
5204	*	0340	A
5204	*	0425	A
5204	*	0510	A
5204	*	0595	A
5204	*	0680	A
5204	*	0765	A
5204	*	0850	A
5204	*	0935	A
5204	*	1020	A
5204	*	1105	A
5204	*	1190	A
5204	*	1275	A
5204	*	1360	A
5204	*	1445	A
5204	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5204	*	0085	B
5204	*	0170	B
5204	*	0255	B
5204	*	0340	B
5204	*	0425	B
5204	*	0510	B
5204	*	0595	B
5204	*	0680	B
5204	*	0765	B
5204	*	0850	B
5204	*	0935	B
5204	*	1020	B
5204	*	1105	B
5204	*	1190	B
5204	*	1275	B
5204	*	1360	B
5204	*	1445	B
5204	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5204	*	0085	C
5204	*	0170	C
5204	*	0255	C
5204	*	0340	C
5204	*	0425	C
5204	*	0510	C
5204	*	0595	C
5204	*	0680	C
5204	*	0765	C
5204	*	0850	C
5204	*	0935	C
5204	*	1020	C
5204	*	1105	C
5204	*	1190	C
5204	*	1275	C
5204	*	1360	C
5204	*	1445	C
5204	*	1530	C



## 520 PRO LBP


Tappeto Modulare 520 PRO LBP, H=8,7 M=85  
 Modular Belt Series 520 PRO LBP, H=8,7 M=85 / Modulare Mattenkette 520 PRO LBP, H=8,7 M=85

Metric Size

CODE STRUCTURE GUIDE			
(Example)			
<b>5210</b>	<b>01</b>	<b>0085</b>	<b>C</b>
Series	Material	Width	Version

Backflex radius min.: 40 mm

**12.7 mm**  
PITCH



### Standard with PFX rollers

Material
<b>LFA - Code 01</b> Low friction Acetal
Max w. load: 25000 N/m
Weight SS pin: 19,0 kg/m <sup>2</sup>
Weight Plastic pin: 15,3 kg/m <sup>2</sup>
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white



**PFX Roller**  
 THE BEST CHOICE FOR  
 DRY RUNNING APPLICATIONS

**Patented**




Bottom view


Version A - Standard

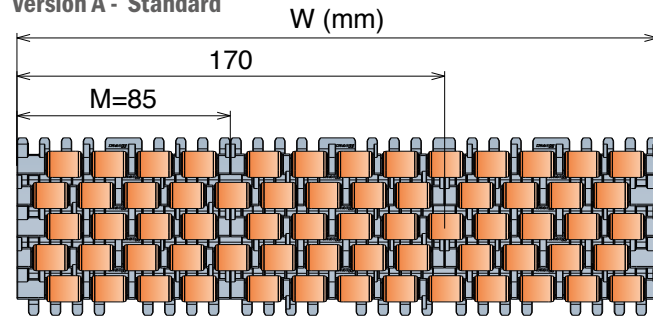

Version B - With 1 Positioner

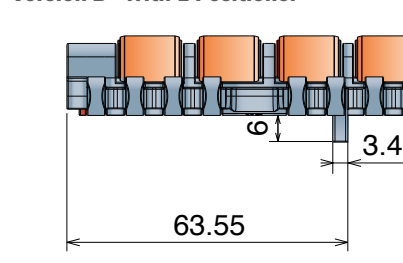

Version C - With 2 Positioner

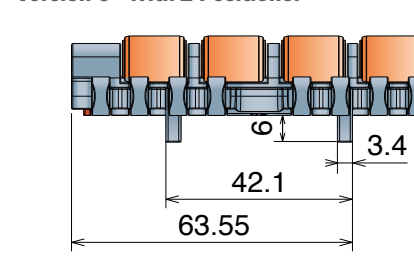

Stainless steel Pin

Series	Material	Width	*Version
5209	01	0085	*
5209	01	0170	*
5209	01	0255	*
5209	01	0340	*
5209	01	0425	*
5209	01	0510	*
5209	01	0595	*
5209	01	0680	*



Plastic Pin

Series	Material	Width	*Version
5210	01	0085	*
5210	01	0170	*
5210	01	0255	*
5210	01	0340	*
5210	01	0425	*
5210	01	0510	*
5210	01	0595	*
5210	01	0680	*

\*Version

Standard Add A | With 1 Positioner Add B | With 2 Positioners Add C

# 520 M

Tappeto Modulare 520 M, H=8,7 K 330  
 Modular Belt Series 520 M, H=8,7 K 330 / Modulare Mattenkette 520 M, H=8,7 K 330

Part	Article-Nr.	Ref.	A	Weight	*Material	Backflex radius min.: 15 mm
1193	1193019330	520 M K330	83,8	1,11	LFA	<div style="background-color: #008000; color: white; padding: 5px; display: inline-block;"><b>12.7mm</b></div> PITCH
1193	1193039330	520 M K330	83,8	1,11	MX	

 10 feet 3.048 m			
240 links	pg. 269-270	pg. 155->161	pg. 516->524

Metric Size

## Magnetic System

\*Material

**LFA - Code 01**  
 Low friction Acetal


Easy Delivery

Max w. load: 2500 N/m  
 Weight: 7,5 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: Ferritic  
 Stainless Steel

**MX - Code 03**  
 Performance PBT

Max w. load: 2000 N/m  
 Weight: 7,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: Ferritic  
 Stainless Steel

Version A - Standard

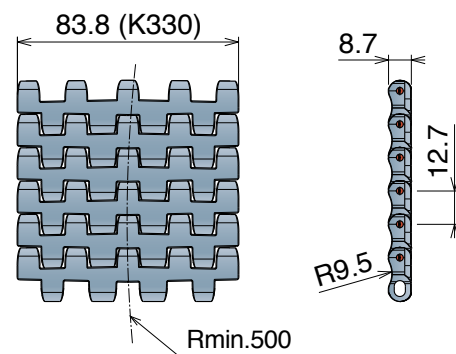


### Advantages:

- No side transfer
- Space saving


### Cost savings:

- Less belt required
- Less conveyor length required
- Less guides required
- Less drives required


Coventional layout

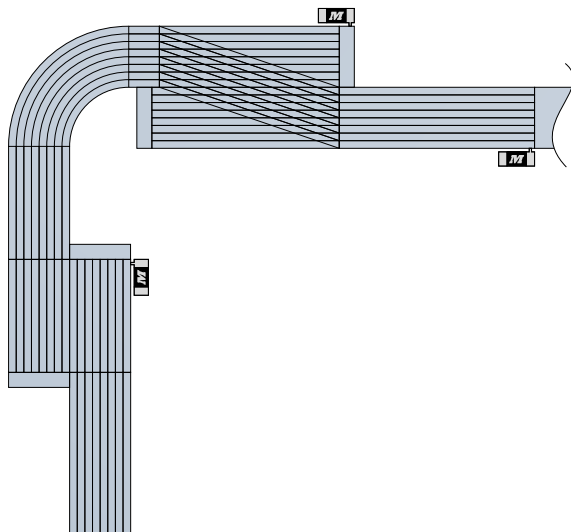

Layout with 520 M K330

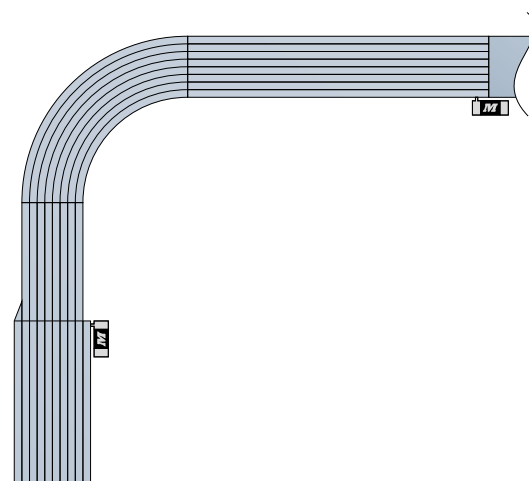

Transfer plate system recommended

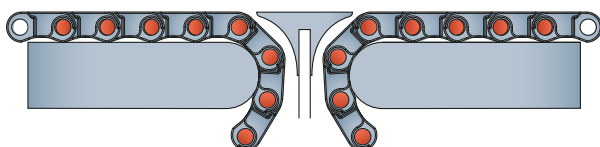

Tappeti modulari / Modular belts / Mattenketten

# 521

Pitch 12,7 mm  
H= 8,7 mm



Imperial Size

521 FT

# 521 FT

Tappeto Modulare 521 FT, H=8,7 M=7,5"  
 Modular Belt Series 521 FT, H=8,7 M=7,5" / Modulare Mattenkette 521 FT, H=8,7 M=7,5"

### CODE STRUCTURE GUIDE

(Example)

<b>5311</b>	<b>01</b>	<b>9750</b>	<b>C</b>
Series	*Material	Width	Version

Backflex radius min.: 10 mm

**12.7mm**  
PITCH

- pg. 267-268
- pg. 516->524
- pg. 484



Imperial Size

### \*Material

#### LFA - Code 01

Low friction Acetal

#### Easy Delivery

- Max w. load: 21500 N/m
- Weight: 8,0 kg/m<sup>2</sup>
- Temp. range dry: -40÷80 °C
- Temp. range wet: -40÷65 °C
- Pin material: PBT white

#### MX - Code 03

Performance PBT

- Max w. load: 17500 N/m
- Weight: 7,8 kg/m<sup>2</sup>
- Temp. range dry: -40÷120 °C
- Temp. range wet: -40÷60 °C
- Pin material: POM grey

#### DKM - Code 16

Aramide Reinforced Acetal

- Max w. load: 21500 N/m
- Weight: 8,0 kg/m<sup>2</sup>
- Temp. range dry: -40÷80 °C
- Temp. range wet: -40÷65 °C
- Pin material: PBT white

#### MWX - Code 17

Polyamide Composite



- Max w. load: 21500 N/m
- Weight: 8,3 kg/m<sup>2</sup>
- Temp. range dry: -40÷104 °C
- Temp. range wet: NR
- Pin material: PBT white

#### MPX - Code 25


Lubricated Acetal

- Max w. load: 21500 N/m
- Weight: 8,0 kg/m<sup>2</sup>
- Temp. range dry: -40÷80 °C
- Temp. range wet: -40÷65 °C
- Pin material: PBT white

### Version A - Standard

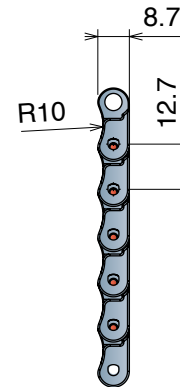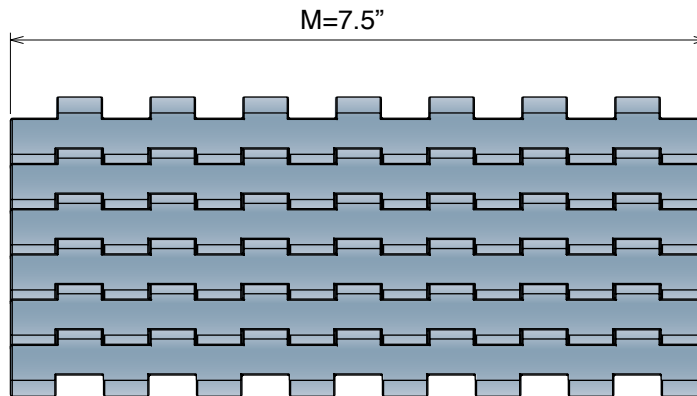

### Version C - With 2 Positioner

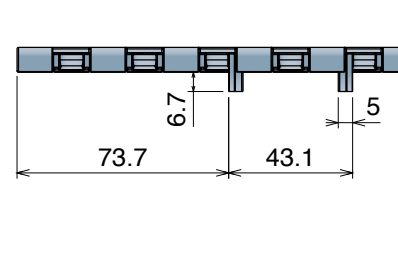

### Version A - Standard

Series	Material	Width	Version
5311	*	9750	A

### Version C - With 2 Positioners

Series	Material	Width	Version
5311	*	9750	C

# 228



**228 One piece with Rollers / 228 One piece with Bearings**

**228 Standard transfer plate**

**228 Transfer plate with Rollers**

**228 Transfer plate with Bearings**

**228 Transfer plate for modular belt with Positioner and Bearings**

**228 Transfer plate for Micropitch**

**New**

Materiale / Material / Materialien:  
**BluLub**  
Rollers: Acciaio inox/Stainless steel/Edelstahl

**228 One piece**  
Tappeti modulari / Modular belts / Mattenketten

# 228 One piece


Piatto di trasferimento / Transfer Plate / Überschubplatte

**Patented**

Used with belt series 520 - 521 - 525 - 530

## Transfer plate with rollers



The **One piece** patent, thanks to the new coupling system minimise the time necessary for the maintenance and allow the possibility to create a "one-piece", easy to clean and guarantee for a greater hygiene.

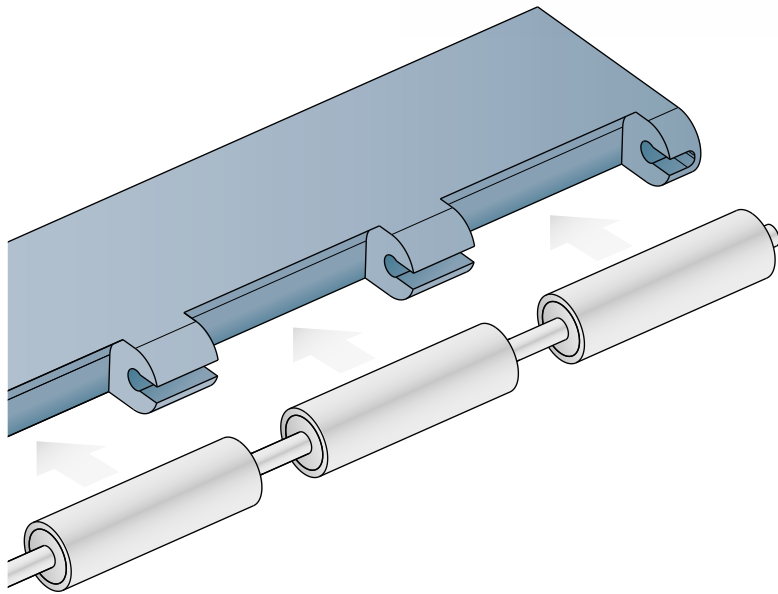

### Advantages:

- ▶ Single piece
- ▶ Improved strenght
- ▶ Fast maintenance
- ▶ Greater hygiene
- ▶ Easy clean
- ▶ Less fixing point

Max width available = 1500 mm

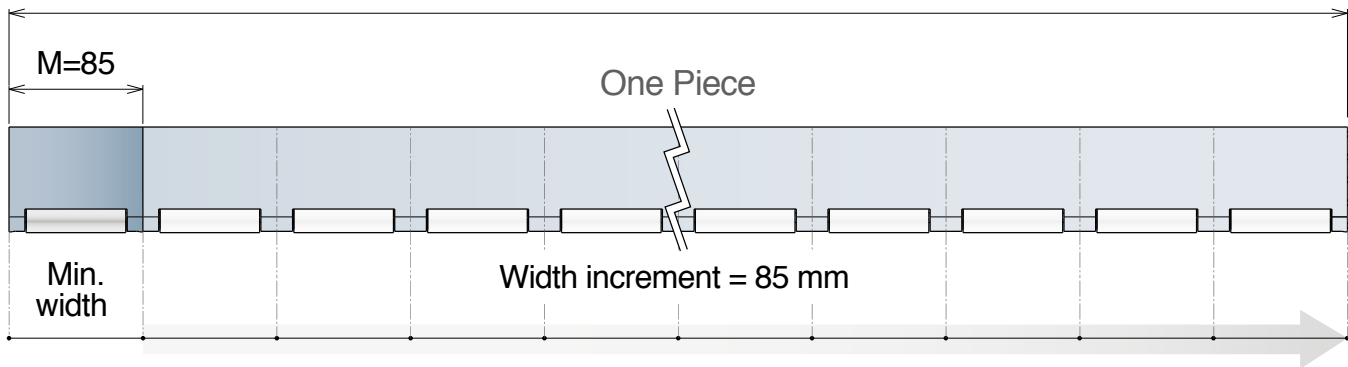

Part	Article-Nr.	K
228	2280425B	425
228	2280510B	510
228	2280595B	595
228	2280680B	680
228	2280765B	765
228	2280850B	850

### Order table

Width	Holes	<input type="checkbox"/> YES	<input type="checkbox"/> NO
Characteristic			

Available different widths and with holes on request.

## 228 One piece


Piatto di trasferimento / Transfer Plate / Überschubplatte

**Patented**

Used with belt series 520 - 521 - 525 - 530

### Transfer plate with bearings



The **One piece** patent, thanks to the new coupling system minimise the time necessary for the maintenance and allow the possibility to create a "one-piece", easy to clean and guarantee for a greater hygiene.

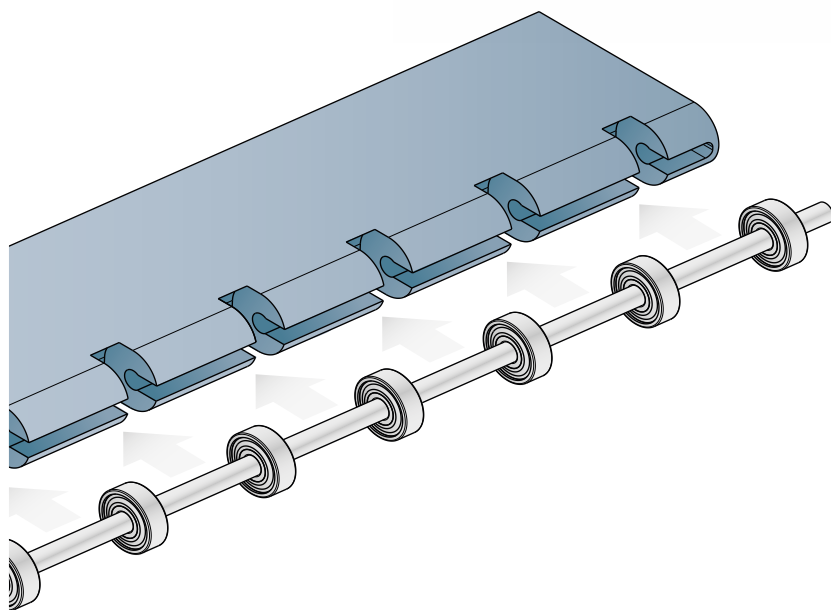

### Advantages:

- ▶ Single piece
- ▶ Improved strenght
- ▶ Fast maintenance
- ▶ Greater hygiene
- ▶ Easy clean
- ▶ Less fixing point

Max width available = 1500 mm

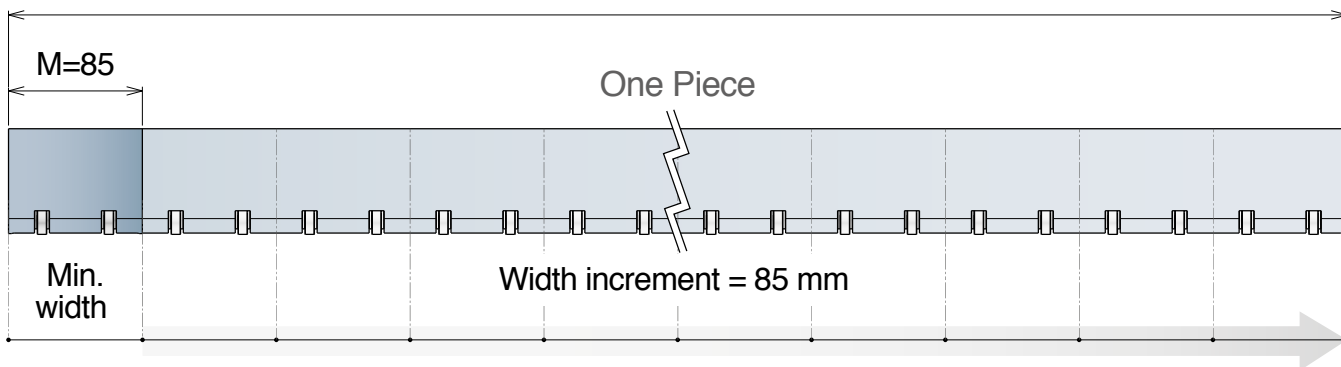

Part	Article-Nr.	K
228	2280425C	425
228	2280510C	510
228	2280595C	595
228	2280680C	680
228	2280765C	765
228	2280850C	850

Available different widths and with holes on request.

### Order table

Width	Holes	<input type="checkbox"/> YES	<input type="checkbox"/> NO
Characteristic			



# 228

Piatto di trasferimento  
 Transfer Plate / Überschubplatte

Delivery: **Easy** **Standard** Max recommended tightening torque 2,0 Nm

Used with belt series 520 - 521 - 525 - 530



## Standard transfer plate

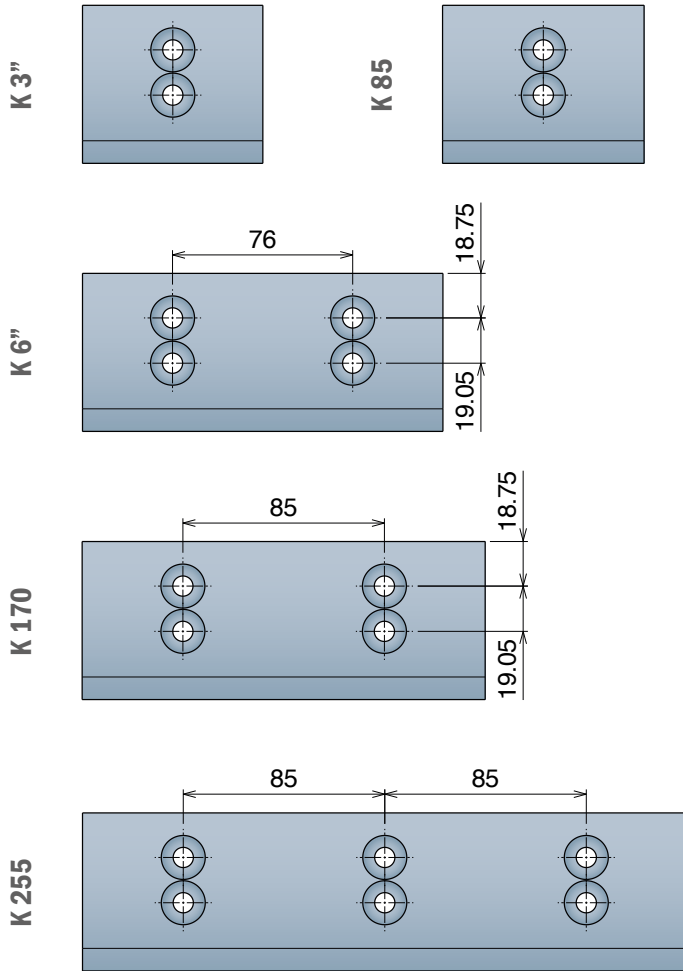

Part	Article-Nr.	K
228	22801	85
228	22802	170
228	22803	255
228	22808	76
228	22809	152,4

Available in different widths on request.

## Transfer plate with rollers

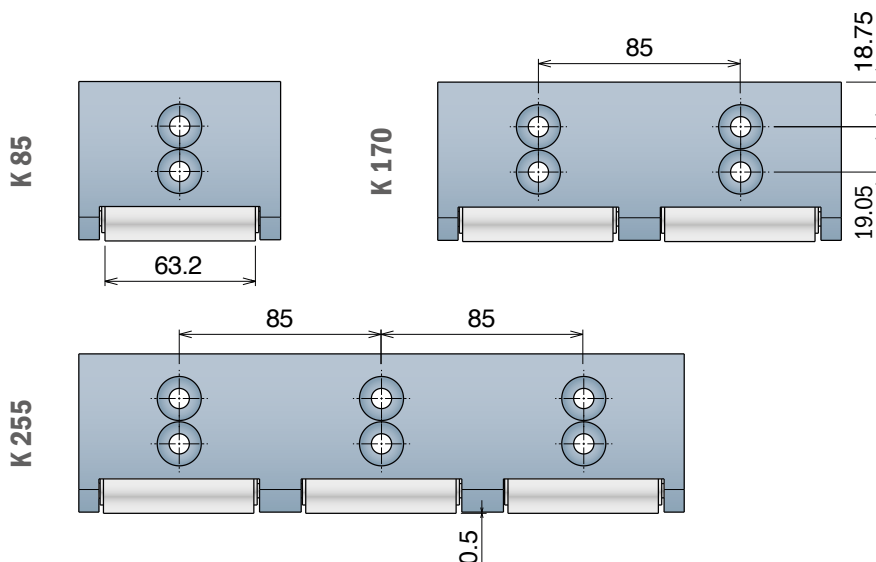

Part	Article-Nr.	K
228	22814	85
228	22815	170
228	22816	255

Available in different widths on request.





## 228 Piatto di trasferimento Transfer Plate / Überschubplatte

Delivery: **Easy** **Standard** Max recommended tightening torque 2,0 Nm

Used with belt series 520 - 521 - 525 - 530


### Transfer plate with bearings

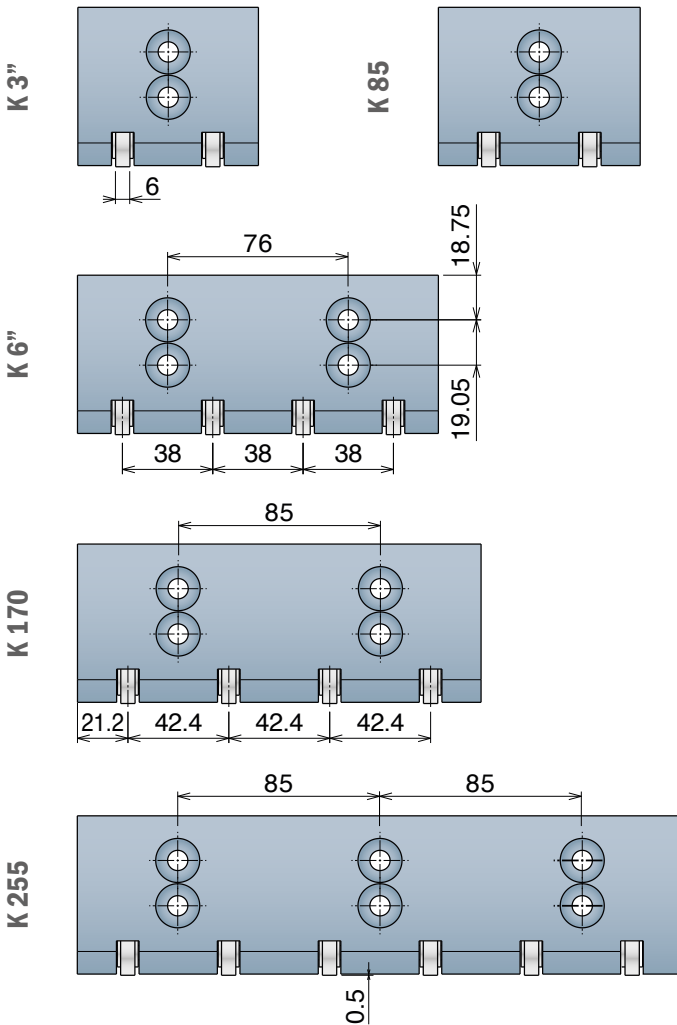

Part	Article-Nr.	K
228	22861	75.8
228	22811	85
228	22862	151.8
228	22812	170
228	22813	255

Available in different widths on request.

### INSTALLATION TIPS

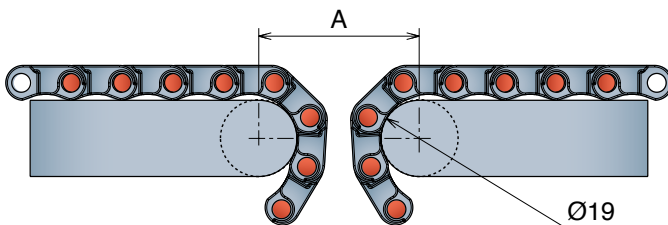

Belt type 1	Belt type 2	A
FT/ FG	FT/ FG	40
FT/ FG	GT	42
FT/ FG	LBP	53
GT	GT	44
GT	LBP	55
LBP	LBP	65



Transfer plate with roller





Transfer plate

# 228

Piatto di trasferimento  
 Transfer Plate / Überschubplatte



Used with belt series 520 - 525

## Transfer plate for modular belt with positioner and Bearings



Part	Article-Nr.	K
228	22807	85

Available in different widths on request.



Part	Article-Nr.	K
228	22817	85




Available in different widths on request.

# 228

Piatto di trasferimento  
 Transfer Plate / Überschubplatte

Used with belt series 510

## Transfer plate for micropitch

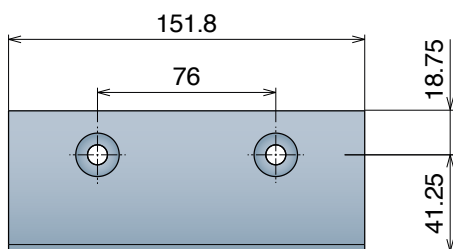

Part	Article-Nr.	K
228	22818	75.8
228	22819	151.8

Available in different widths on request.

# 590

Pitch 19,05 mm  
H= 8,7 mm



590 FT  
590 FT *One track Belt*  
590 FTT

# 590 FT

Tappeto Modulare 590 FT, H=8,7 M=3"  
 Modular Belt Series 590 FT, H=8,7 M=3" / Modulare Mattenkette 590 FT, H=8,7 M=3"

### CODE STRUCTURE GUIDE

(Example)

<b>5301</b>	<b>01</b>	<b>0009</b>	<b>C</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 25 mm

**19.05 mm**  
PITCH




pg. 272



pg. 516->524



pg. 485

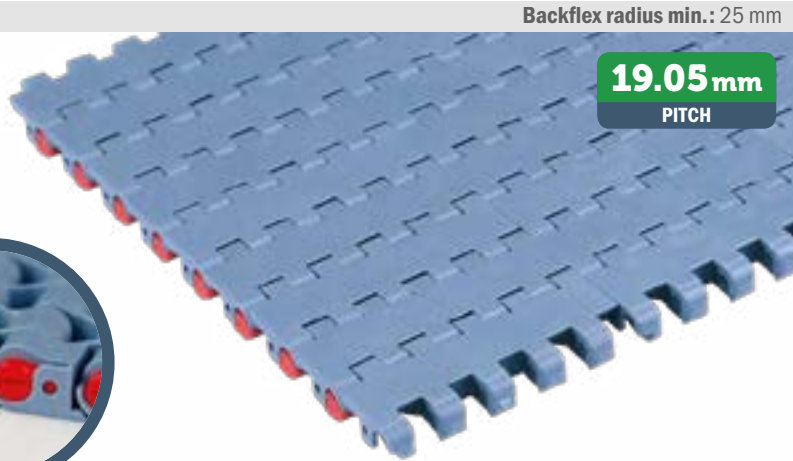

Imperial Size

### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 30000 N/m  
 Weight: 7,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

#### MX - Code 03

Performance PBT


Max w. load: 24000 N/m  
 Weight: 7,0 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

#### MPX - Code 25


Lubricated Acetal

Max w. load: 30000 N/m  
 Weight: 7,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

### Version A - Standard

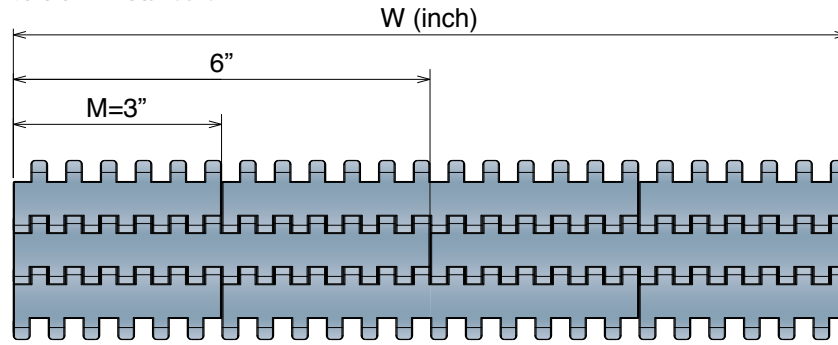

### Version C - With 2 Positioner

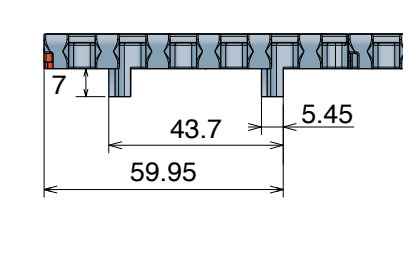

### Version A - Standard

Series	Material	Width	Version
5301	*	0003	A
5301	*	0006	A
5301	*	0009	A
5301	*	0012	A
5301	*	0015	A
5301	*	0018	A
5301	*	0021	A
5301	*	0024	A
5301	*	0027	A
5301	*	0030	A
5301	*	0033	A
5301	*	0036	A
5301	*	0039	A
5301	*	0042	A
5301	*	0045	A
5301	*	0048	A
5301	*	0051	A
5301	*	0054	A

### Version C - With 2 Positioners

Series	Material	Width	Version
5301	*	0003	C
5301	*	0006	C
5301	*	0009	C
5301	*	0012	C
5301	*	0015	C
5301	*	0018	C
5301	*	0021	C
5301	*	0024	C
5301	*	0027	C
5301	*	0030	C
5301	*	0033	C
5301	*	0036	C
5301	*	0039	C
5301	*	0042	C
5301	*	0045	C
5301	*	0048	C
5301	*	0051	C
5301	*	0054	C

# 590 FT One track Belt

Tappeti modulari / Modular belts / Mattenketten

Imperial Size


## 590 FT One track Belt


Tappeto Modulare 590 FT, H=8,7  
Modular Belt Series 590 FT, H=8,7 / Modulare Mattenkette 590 FT, H=8,7

CODE STRUCTURE GUIDE			
(Example)			
<b>5301</b>	<b>03</b>	<b>9325</b>	<b>C</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm


**19.05 mm**  
PITCH

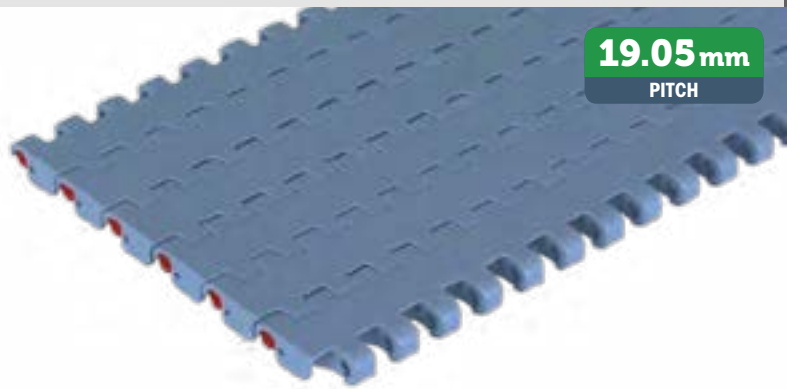


		
pg. 272	pg. 516->524	pg. 486

*Material
<b>LFA - Code 01</b> <i>Low friction Acetal</i>
<i>Easy Delivery</i>
Max w. load: 30000 N/m
Weight: 7,2 kg/m <sup>2</sup>
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

Version A - Standard




Version C - With 2 Positioner

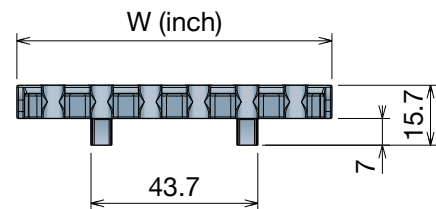

MX - Code 03
<i>Performance PBT</i>
Max w. load: 24000 N/m
Weight: 7,0 kg/m <sup>2</sup>
Temp. range dry: -40+120 °C
Temp. range wet: -40+60 °C
Pin material: POM grey

Max w. load: 30000 N/m
Weight: 7,2 kg/m <sup>2</sup>
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

MPX - Code 25
<i>Lubricated Acetal</i>
Max w. load: 30000 N/m
Weight: 7,2 kg/m <sup>2</sup>
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

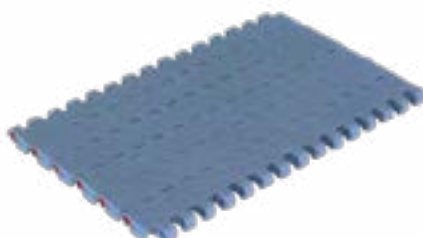

### K325 - One track belt

Series	Material	Width	Version
5301	*	9325	A
5301	*	9325	C

### K450 - One track belt

Series	Material	Width	Version
5301	*	9450	A
5301	*	9450	C

### K750 - One track belt

Series	Material	Width	Version
5301	*	9750	A
5301	*	9750	C

Tappeti modulari / Modular belts / Mattenketten


## 590 FTT

Tappeto Modulare 590 FTT, H=8,7  
Modular Belt Series 590 FTT, H=8,7 / Modulare Mattenkette 590 FTT, H=8,7

CODE STRUCTURE GUIDE			
(Example)			
5306	01	9450	C-R
Series	*Material	Width	Version

Backflex radius min.: 25 mm


**19.05 mm**  
PITCH



pg. 272

pg. 516->524

pg. 487

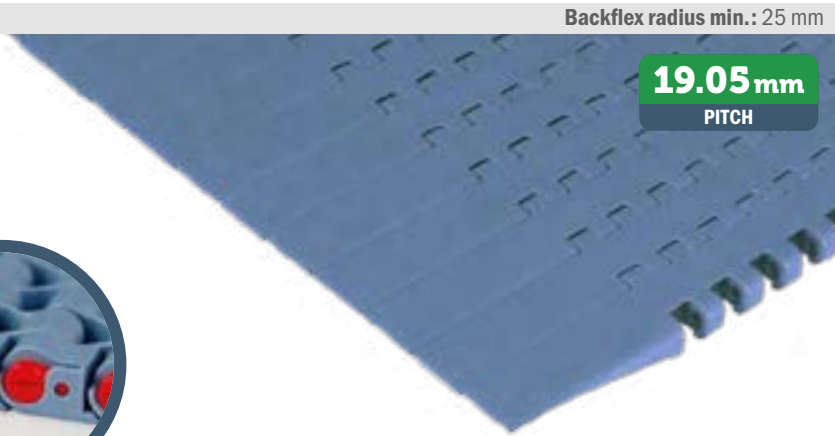

Imperial Size

### \*Material

#### LFA - Code 01

Low friction Acetal

Max w. load: 30000 N/m  
Weight: 7,2 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

#### MX - Code 03

Performance PBT


Max w. load: 24000 N/m  
Weight: 7,0 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey

#### MPX - Code 25


Lubricated Acetal

Max w. load: 30000 N/m  
Weight: 7,2 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

### Version 590 FTT DX

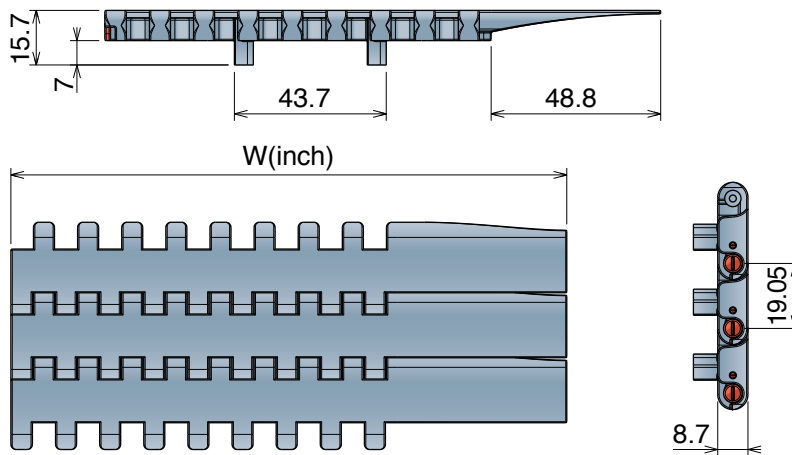

### Version 590 FTT SX

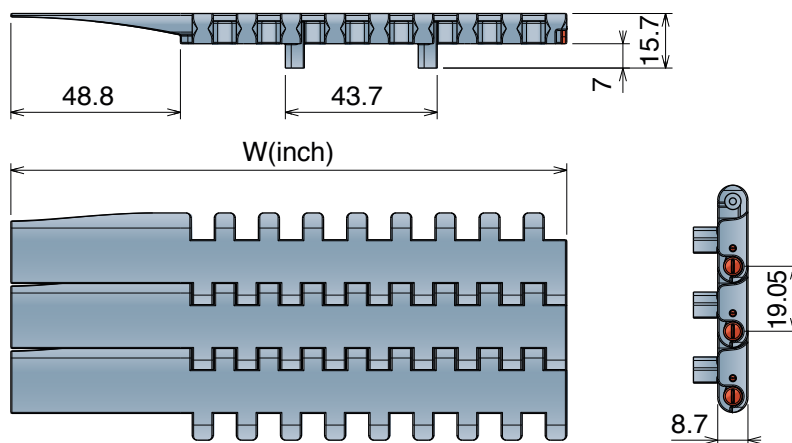

### Version 590 FTT DX

Series	Material	Width	Version	Total width
5306	*	9450	C-R	160.0
5306	*	9750	C-R	236.2

### Version 590 FTT SX

Series	Material	Width	Version	Total width
5306	*	9450	C-L	160.0
5306	*	9750	C-L	236.2

# 525

Pitch 15,0 mm  
H= 8,7 mm



- 525 HD FT
- 525 HD FT+RIB
- 525 FTT
- 525 HD FG
- 525 HD GT
- 525 HD GT *Side Indent*


## 525 HD FT Tappeto Modulare 525 HD, H=8,7 M=85

Modular Belt Series 525 HD, H=8,7 M=85 / Modulare Mattenkette 525 HD, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5261	03	0340	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0mm**  
PITCH



**Reinforced positioner**



Metric Size

\*Material

### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 25500 N/m  
Weight: 9,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

### MX - Code 03

Performance PBT

Max w. load: 20500 N/m  
Weight: 8,7 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey


### PFX - Code 30

Extra performance PBT


Max w. load: 20500 N/m  
Weight: 8,7 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey

**THE BEST CHOICE FOR DRY RUNNING APPLICATIONS**


Version A - Standard

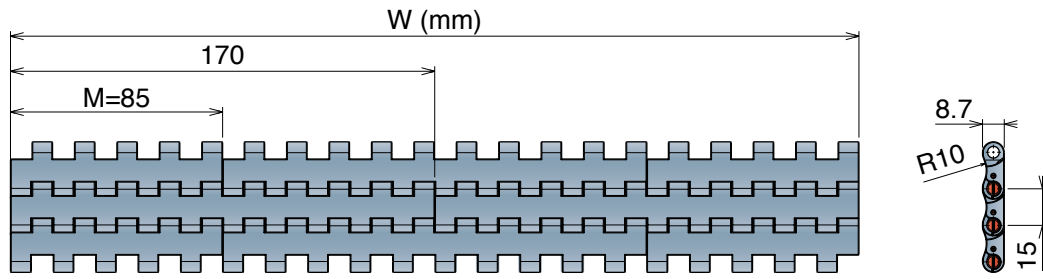

Version B - With 1 Positioner

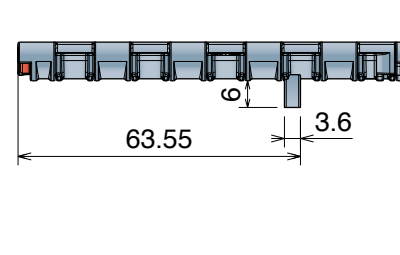

Version C - With 2 Positioner

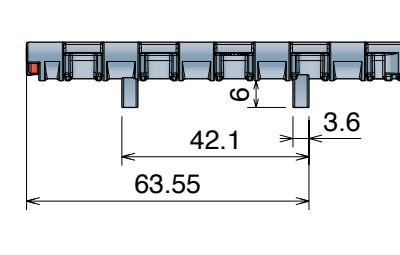

Version A - Standard

Series	Material	Width	Version
5261	*	0085	A
5261	*	0170	A
5261	*	0255	A
5261	*	0340	A
5261	*	0425	A
5261	*	0510	A
5261	*	0595	A
5261	*	0680	A
5261	*	0765	A
5261	*	0850	A
5261	*	0935	A
5261	*	1020	A
5261	*	1105	A
5261	*	1190	A
5261	*	1275	A
5261	*	1360	A
5261	*	1445	A
5261	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5261	*	0085	B
5261	*	0170	B
5261	*	0255	B
5261	*	0340	B
5261	*	0425	B
5261	*	0510	B
5261	*	0595	B
5261	*	0680	B
5261	*	0765	B
5261	*	0850	B
5261	*	0935	B
5261	*	1020	B
5261	*	1105	B
5261	*	1190	B
5261	*	1275	B
5261	*	1360	B
5261	*	1445	B
5261	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5261	*	0085	C
5261	*	0170	C
5261	*	0255	C
5261	*	0340	C
5261	*	0425	C
5261	*	0510	C
5261	*	0595	C
5261	*	0680	C
5261	*	0765	C
5261	*	0850	C
5261	*	0935	C
5261	*	1020	C
5261	*	1105	C
5261	*	1190	C
5261	*	1275	C
5261	*	1360	C
5261	*	1445	C
5261	*	1530	C



# 525 HD FT + RIB

Tappeti modulari / Modular belts / Mattenketten

Metric Size

## 525 HD FT + RIB


Tappeto Modulare 525 HD, H=8,7 M=85

Modular Belt Series 525 HD, H=8,7 M=85 / Modulare Mattenkette 525 HD, H=8,7 M=85

CODE STRUCTURE GUIDE				
(Example)				
5261	01	0340	C	XR3
Series	*Material	Width	Version	RIB

Backflex radius min.: 25 mm

**15.0 mm**  
PITCH



pg. 271

pg. 516->524

pg. 488

\*Material

### LFA - Code 01


Low friction Acetal

Max w. load: 25500 N/m  
Weight: 9,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white


### MX - Code 03

Performance PBT


Max w. load: 20500 N/m  
Weight: 8,7 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey

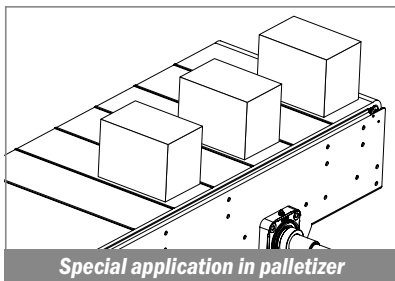


### Version A - Standard

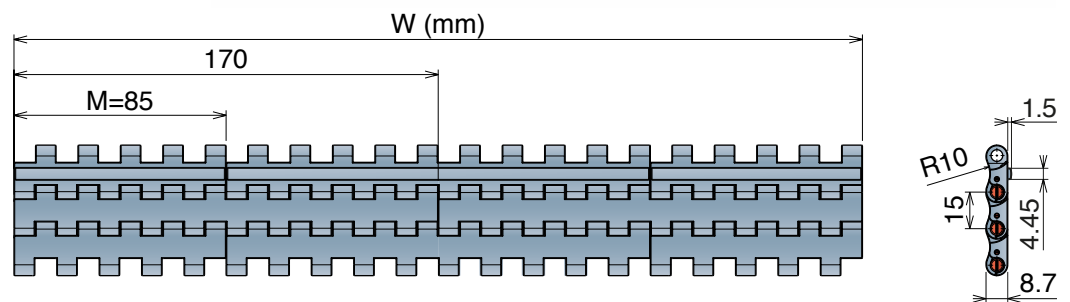

### Version B - With 1 Positioner

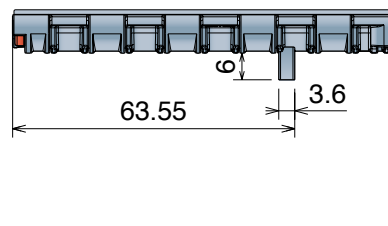

### Version C - With 2 Positioner

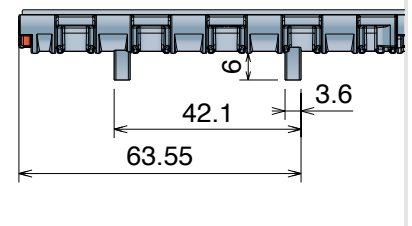

### Version A - Standard

Series	Material	Width	Version	RIB
5261	*	0085	A	XR3 or XR5
5261	*	0170	A	XR3 or XR5
5261	*	0255	A	XR3 or XR5
5261	*	0340	A	XR3 or XR5
5261	*	0425	A	XR3 or XR5
5261	*	0510	A	XR3 or XR5
5261	*	0595	A	XR3 or XR5
5261	*	0680	A	XR3 or XR5
5261	*	0765	A	XR3 or XR5
5261	*	0850	A	XR3 or XR5
5261	*	0935	A	XR3 or XR5
5261	*	1020	A	XR3 or XR5
5261	*	1105	A	XR3 or XR5
5261	*	1190	A	XR3 or XR5
5261	*	1275	A	XR3 or XR5
5261	*	1360	A	XR3 or XR5
5261	*	1445	A	XR3 or XR5
5261	*	1530	A	XR3 or XR5

XR3 (RIB every 3 links) | XR5 (RIB every 5 links)

### Version B - With 1 Positioner

Series	Material	Width	Version	RIB
5261	*	0085	B	XR3 or XR5
5261	*	0170	B	XR3 or XR5
5261	*	0255	B	XR3 or XR5
5261	*	0340	B	XR3 or XR5
5261	*	0425	B	XR3 or XR5
5261	*	0510	B	XR3 or XR5
5261	*	0595	B	XR3 or XR5
5261	*	0680	B	XR3 or XR5
5261	*	0765	B	XR3 or XR5
5261	*	0850	B	XR3 or XR5
5261	*	0935	B	XR3 or XR5
5261	*	1020	B	XR3 or XR5
5261	*	1105	B	XR3 or XR5
5261	*	1190	B	XR3 or XR5
5261	*	1275	B	XR3 or XR5
5261	*	1360	B	XR3 or XR5
5261	*	1445	B	XR3 or XR5
5261	*	1530	B	XR3 or XR5

XR3 (RIB every 3 links) | XR5 (RIB every 5 links)

### Version C - With 2 Positioners

Series	Material	Width	Version	RIB
5261	*	0085	C	XR3 or XR5
5261	*	0170	C	XR3 or XR5
5261	*	0255	C	XR3 or XR5
5261	*	0340	C	XR3 or XR5
5261	*	0425	C	XR3 or XR5
5261	*	0510	C	XR3 or XR5
5261	*	0595	C	XR3 or XR5
5261	*	0680	C	XR3 or XR5
5261	*	0765	C	XR3 or XR5
5261	*	0850	C	XR3 or XR5
5261	*	0935	C	XR3 or XR5
5261	*	1020	C	XR3 or XR5
5261	*	1105	C	XR3 or XR5
5261	*	1190	C	XR3 or XR5
5261	*	1275	C	XR3 or XR5
5261	*	1360	C	XR3 or XR5
5261	*	1445	C	XR3 or XR5
5261	*	1530	C	XR3 or XR5

XR3 (RIB every 3 links) | XR5 (RIB every 5 links)



# 525 FTT

Tappeto Modulare 525 FTT, H=8,7 M=85  
 Modular Belt Series 525 FTT, H=8,7 M=85 / Modulare Mattenkette 525 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5256	03	0085	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0mm**  
PITCH

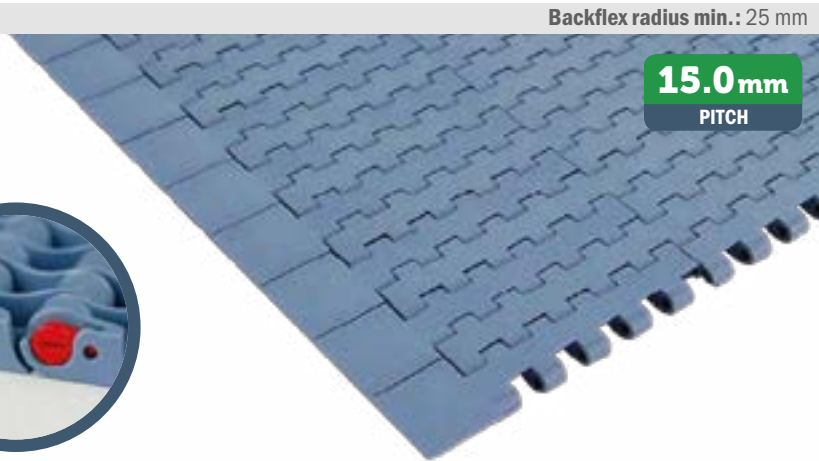

Metric Size

### \*Material

#### LFA - Code 01

Low friction Acetal


Max w. load: 21500 N/m  
 Weight: 7,8 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

#### MX - Code 03

Performance PBT

Max w. load: 17500 N/m  
 Weight: 7,5 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

### Version C

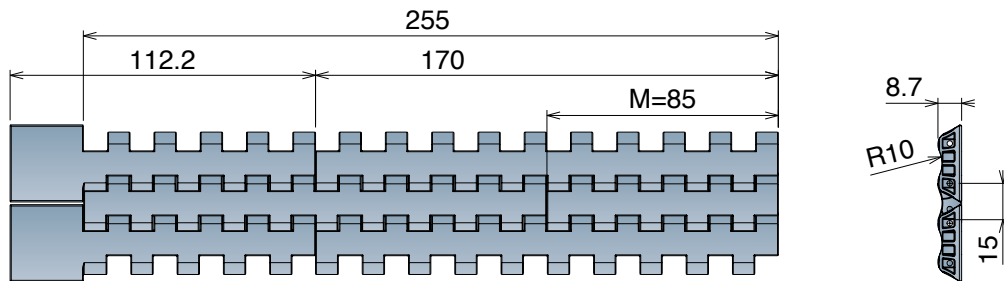

### Version CN - Near



### Version C0 - Opposite



### Version C

Series	Material	Width	Version
5256	*	0085	C

### Version CN - Near

Series	Material	Width	Version
5256	*	0170	CN
5256	*	0255	CN

### Version C0 - Opposite

Series	Material	Width	Version
5256	*	0170	C0
5256	*	0255	C0

On request available with bigger/different width



## 525 HD FG Open Surface 35%

Tappeto Modulare 525 HD Flush grid, H=8,7 M=85  
 Modular Belt Series 525 HD Flush grid, H=8,7 M=85 / Modulare Mattenkette 525 HD Flush grid, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
<b>5262</b>	<b>03</b>	<b>0340</b>	<b>C</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0 mm**  
PITCH

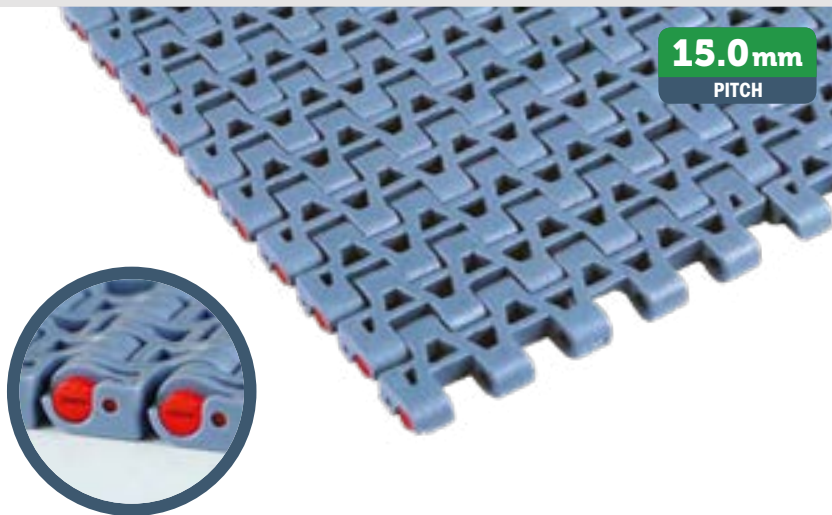

### \*Material

**LFA - Code 01**  
Low friction Acetal

**Easy Delivery**  
 Max w. load: 25500 N/m  
 Weight: 8,1 kg/m<sup>2</sup>  
 Temp. range dry: -40+80 °C  
 Temp. range wet: -40+65 °C  
 Pin material: PBT white

**MX - Code 03**  
Performance PBT


Max w. load: 20500 N/m  
 Weight: 7,8 kg/m<sup>2</sup>  
 Temp. range dry: -40+120 °C  
 Temp. range wet: -40+60 °C  
 Pin material: POM grey

**PFX - Code 30**  
Extra performance PBT


Max w. load: 20500 N/m  
 Weight: 7,8 kg/m<sup>2</sup>  
 Temp. range dry: -40+120 °C  
 Temp. range wet: -40+60 °C  
 Pin material: POM grey

**THE BEST CHOICE FOR DRY RUNNING APPLICATIONS**


### Version A - Standard

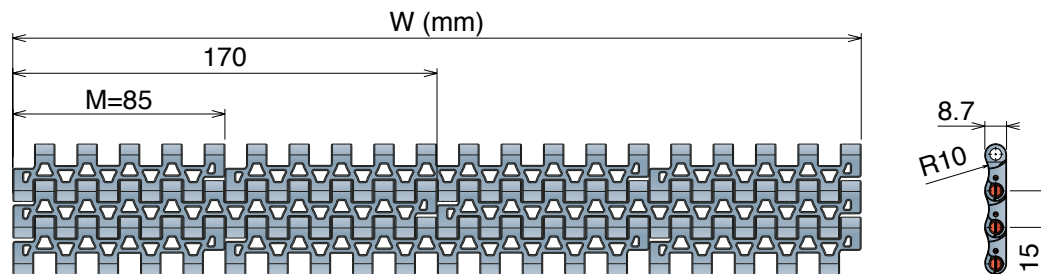

### Version B - With 1 Positioner



### Version C - With 2 Positioners

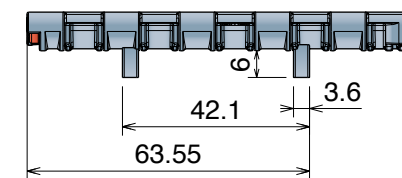

### Version A - Standard

Series	Material	Width	Version
5262	*	0085	A
5262	*	0170	A
5262	*	0255	A
5262	*	0340	A
5262	*	0425	A
5262	*	0510	A
5262	*	0595	A
5262	*	0680	A
5262	*	0765	A
5262	*	0850	A
5262	*	0935	A
5262	*	1020	A
5262	*	1105	A
5262	*	1190	A
5262	*	1275	A
5262	*	1360	A
5262	*	1445	A
5262	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5262	*	0085	B
5262	*	0170	B
5262	*	0255	B
5262	*	0340	B
5262	*	0425	B
5262	*	0510	B
5262	*	0595	B
5262	*	0680	B
5262	*	0765	B
5262	*	0850	B
5262	*	0935	B
5262	*	1020	B
5262	*	1105	B
5262	*	1190	B
5262	*	1275	B
5262	*	1360	B
5262	*	1445	B
5262	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5262	*	0085	C
5262	*	0170	C
5262	*	0255	C
5262	*	0340	C
5262	*	0425	C
5262	*	0510	C
5262	*	0595	C
5262	*	0680	C
5262	*	0765	C
5262	*	0850	C
5262	*	0935	C
5262	*	1020	C
5262	*	1105	C
5262	*	1190	C
5262	*	1275	C
5262	*	1360	C
5262	*	1445	C
5262	*	1530	C



## 525 HD GT

Tappeto Modulare 525 HD GT, H=8,7 M=85  
 Modular Belt Series 525 HD GT, H=8,7 M=85 / Modulare Mattenkette 525 HD GT, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5263	03	0340	C-S
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0mm**  
PITCH

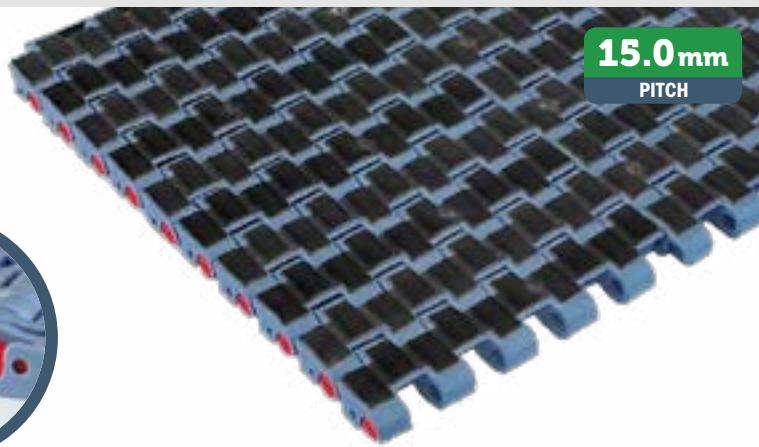

Metric Size

### \*Material

#### LFA - Code 01

Low friction Acetal

#### Easy Delivery

Max w. load: 25500 N/m  
 Weight: 10,35 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white  
 Hardness of  
 Grip top Rubber: 50 ShA

#### PP - Code 02

Polypropylene


Max w. load: 15500 N/m  
 Weight: 8,7 kg/m<sup>2</sup>  
 Temp. range dry: 4÷80 °C  
 Temp. range wet: 4÷65 °C  
 Pin material: PP blu  
 Hardness of  
 Grip top Rubber: 50 ShA

#### MX - Code 03


Performance PBT

Max w. load: 20500 N/m  
 Weight: 10,35 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey  
 Hardness of  
 Grip top Rubber: 50 ShA


### Version A - Standard

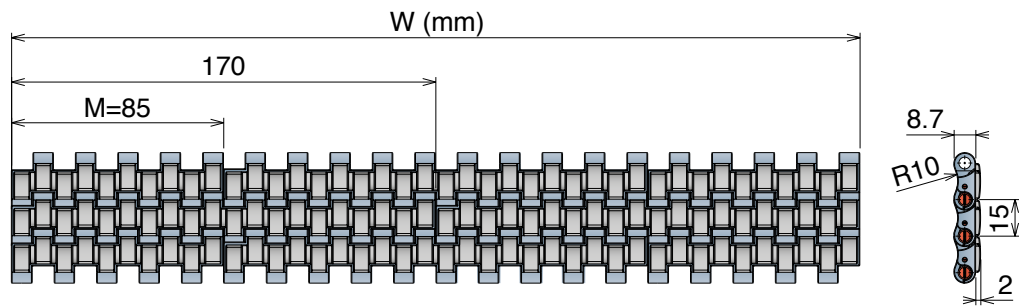

### Version B - With 1 Positioner

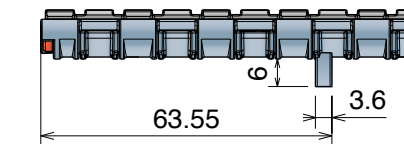

### Version C - With 2 Positioners

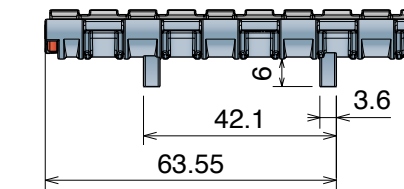

### Version A - Standard

Series	Material	Width	Version
5263	*	0085	A
5263	*	0170	A
5263	*	0255	A
5263	*	0340	A
5263	*	0425	A
5263	*	0510	A
5263	*	0595	A
5263	*	0680	A
5263	*	0765	A
5263	*	0850	A
5263	*	0935	A
5263	*	1020	A
5263	*	1105	A
5263	*	1190	A
5263	*	1275	A
5263	*	1360	A
5263	*	1445	A
5263	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5263	*	0085	B
5263	*	0170	B
5263	*	0255	B
5263	*	0340	B
5263	*	0425	B
5263	*	0510	B
5263	*	0595	B
5263	*	0680	B
5263	*	0765	B
5263	*	0850	B
5263	*	0935	B
5263	*	1020	B
5263	*	1105	B
5263	*	1190	B
5263	*	1275	B
5263	*	1360	B
5263	*	1445	B
5263	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5263	*	0085	C
5263	*	0170	C
5263	*	0255	C
5263	*	0340	C
5263	*	0425	C
5263	*	0510	C
5263	*	0595	C
5263	*	0680	C
5263	*	0765	C
5263	*	0850	C
5263	*	0935	C
5263	*	1020	C
5263	*	1105	C
5263	*	1190	C
5263	*	1275	C
5263	*	1360	C
5263	*	1445	C
5263	*	1530	C

# 525 HD GT Side indent

Tappeti modulari / Modular belts / Mattenketten

Metric Size



## 525 HD GT Side Indent

Tappeto Modulare 525 HD GT Side Indent, H=8,7 M=85  
 Modular Belt Series 525 HD GT Side Indent, H=8,7 M=85 / Modulare Mattenkette 525 HD GT Side Indent, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5265	03	0340	C-S
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0mm**  
PITCH

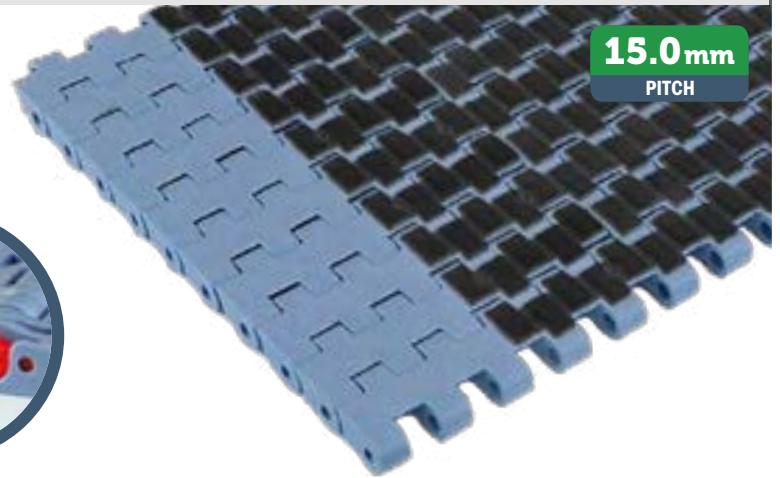

### \*Material

**LFA - Code 01**  
Low friction Acetal

Easy Delivery

Max w. load: 25500 N/m  
 Weight: 10,35 kg/m<sup>2</sup>  
 Temp. range dry: -40+80 °C  
 Temp. range wet: -40+65 °C  
 Pin material: PBT white  
 Hardness of Grip top Rubber: 50 ShA


**PP - Code 02**  
Polypropylene

Max w. load: 15500 N/m  
 Weight: 8,7 kg/m<sup>2</sup>  
 Temp. range dry: 4+80 °C  
 Temp. range wet: 4+65 °C  
 Pin material: PP blu  
 Hardness of Grip top Rubber: 50 ShA


**MX - Code 03**  
Performance PBT

Max w. load: 20500 N/m  
 Weight: 10,35 kg/m<sup>2</sup>  
 Temp. range dry: -40+120 °C  
 Temp. range wet: -40+60 °C  
 Pin material: POM grey  
 Hardness of Grip top Rubber: 50 ShA


### Version A - Standard

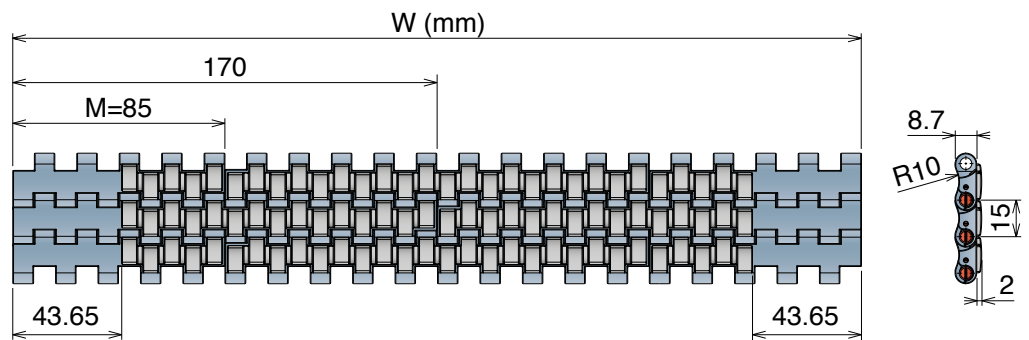

### Version B - With 1 Positioner

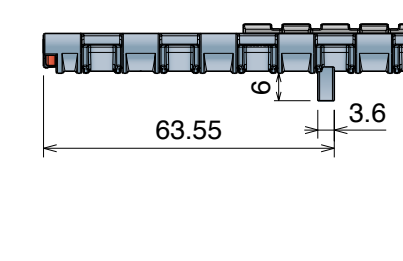

### Version C - With 2 Positioners

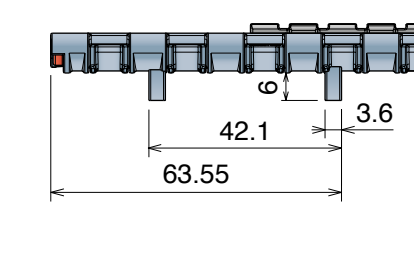

### Version A - Standard

Series	Material	Width	Version
5265	*	0255	A
5265	*	0340	A
5265	*	0425	A
5265	*	0510	A
5265	*	0595	A
5265	*	0680	A
5265	*	0765	A
5265	*	0850	A
5265	*	0935	A
5265	*	1020	A
5265	*	1105	A
5265	*	1190	A
5265	*	1275	A
5265	*	1360	A
5265	*	1445	A
5265	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5265	*	0255	B
5265	*	0340	B
5265	*	0425	B
5265	*	0510	B
5265	*	0595	B
5265	*	0680	B
5265	*	0765	B
5265	*	0850	B
5265	*	0935	B
5265	*	1020	B
5265	*	1105	B
5265	*	1190	B
5265	*	1275	B
5265	*	1360	B
5265	*	1445	B
5265	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5265	*	0255	C
5265	*	0340	C
5265	*	0425	C
5265	*	0510	C
5265	*	0595	C
5265	*	0680	C
5265	*	0765	C
5265	*	0850	C
5265	*	0935	C
5265	*	1020	C
5265	*	1105	C
5265	*	1190	C
5265	*	1275	C
5265	*	1360	C
5265	*	1445	C
5265	*	1530	C


Tappeti modulari / Modular belts / Mattenketten

# 530 Series

# 530

Pitch 15,0 mm

H= 8,7 mm

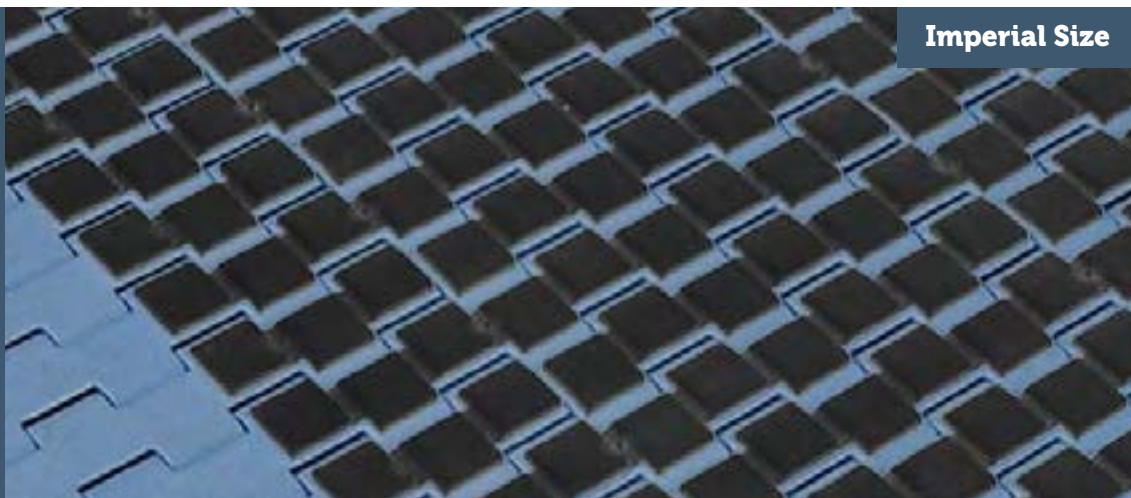

530 FT

530 FTT

530 GT

530 GT *Side indent*

530 LBP

**Movex**<sup>®</sup>




## 530 FT


Tappeto Modulare 530 FT, H=8,7 M=3"  
Modular Belt Series 530 FT, H=8,7 M=3" / Modulare Mattenkette 530 FT, H=8,7 M=3"

CODE STRUCTURE GUIDE			
(Example)			
<b>5321</b>	<b>01</b>	<b>0030</b>	<b>A</b>
Series	*Material	Width	Version


Backflex radius min.: 25 mm

**15.0mm**  
PITCH

		
pg. 271	pg. 516->524	pg. 489

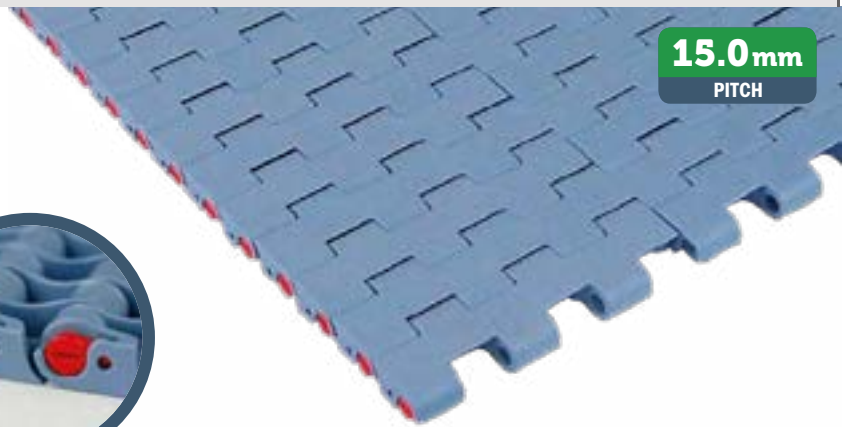

### Version A - Standard

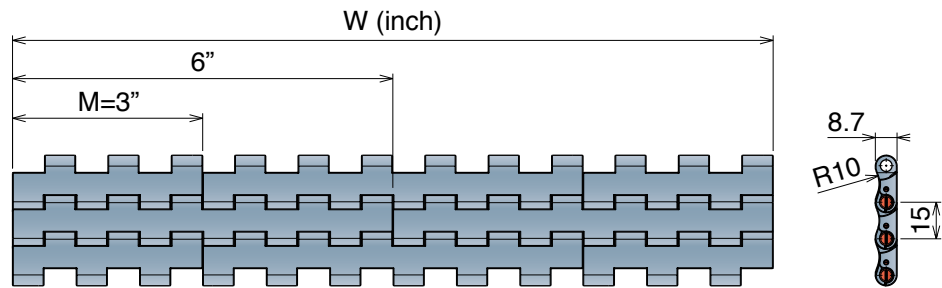

#### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 26000 N/m  
Weight: 9,2 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

#### MX - Code 03

Performance PBT

Max w. load: 21000 N/m  
Weight: 9,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey

#### DKM - Code 16

Aramide Reinforced Acetal

Max w. load: 26000 N/m  
Weight: 9,2 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

#### MWX - Code 17

Polyamide Composite

Max w. load: 26000 N/m  
Weight: 9,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷104 °C  
Temp. range wet: NR  
Pin material: PBT white

#### MPX - Code 25

Lubricated Acetal

Max w. load: 26000 N/m  
Weight: 9,2 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

### Version A - Standard

Series	Material	Width	Version
5321	*	0003	A
5321	*	0006	A
5321	*	0009	A
5321	*	0012	A
5321	*	0015	A
5321	*	0018	A
5321	*	0021	A
5321	*	0024	A
5321	*	0027	A
5321	*	0030	A
5321	*	0033	A
5321	*	0036	A
5321	*	0039	A
5321	*	0042	A
5321	*	0045	A
5321	*	0048	A
5321	*	0051	A
5321	*	0054	A




## 530 FTT

Tappeto Modulare 530 FTT, H=8,7 M=3"  
 Modular Belt Series 530 FTT, H=8,7 M=3" / Modulare Mattenkette 530 FTT, H=8,7 M=3"

CODE STRUCTURE GUIDE			
(Example)			
5326	01	0006	A
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0mm**  
PITCH

		
pg. 271	pg. 516->524	pg. 489



Imperial Size

### \*Material

#### LFA - Code 01

Low friction Acetal


Max w. load: 26000 N/m  
 Weight: 9,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

#### MX - Code 03

Performance PBT

Max w. load: 21000 N/m  
 Weight: 9,0 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

### Version A - Standard

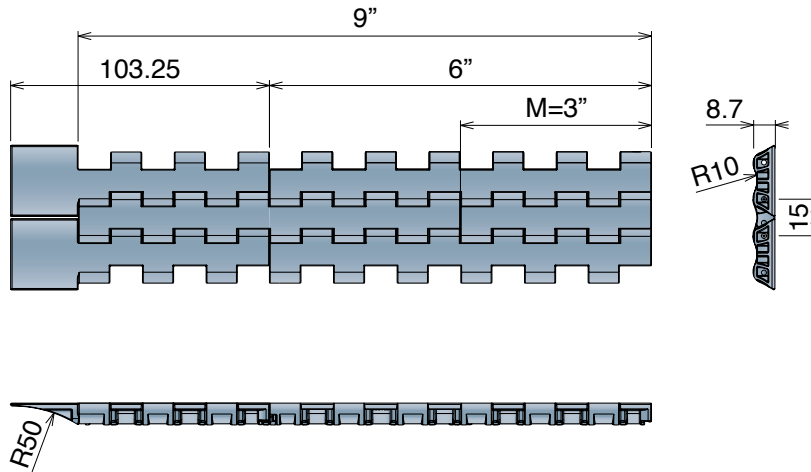

### Version A - Standard

Series	Material	Width	Version
5326	*	0003	A
5326	*	0006	A
5326	*	0009	A

On request available with bigger/different width



# 530 GT

Tappeti modulari / Modular belts / Mattenketten

Imperial Size

## 530 GT

Tappeto Modulare 530 GT, H=8,7 M=3"  
Modular Belt Series 530 GT, H=8,7 M=3" / Modulare Mattenkette 530 GT, H=8,7 M=3"

### CODE STRUCTURE GUIDE

(Example)

<b>5323</b>	<b>01</b>	<b>0009</b>	<b>A-S</b>
Series	*Material	Width	Version

Backflex radius min.: 30 mm

**15.0mm**  
PITCH




pg. 271



pg. 516->524



pg. 489

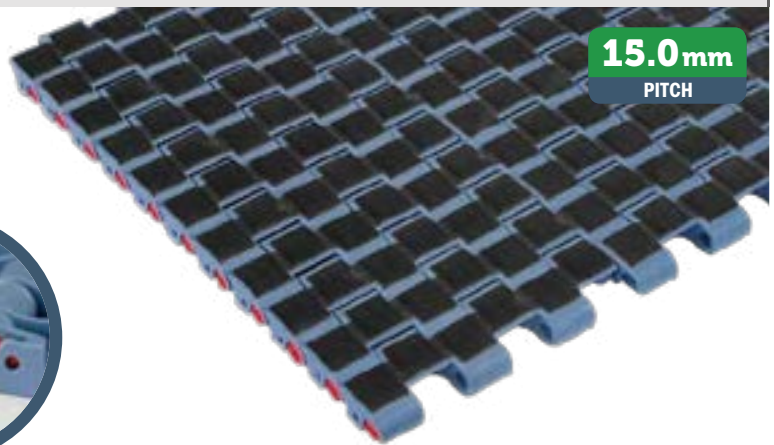

### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

**Max w. load:** 26000 N/m  
**Weight:** 10,6 kg/m<sup>2</sup>  
**Temp. range dry:** -40÷80 °C  
**Temp. range wet:** -40÷65 °C  
**Pin material:** PBT white  
**Hardness of Grip top Rubber:** 50 ShA

#### PP - Code 02

Polypropylene



**Max w. load:** 16000 N/m  
**Weight:** 9,0 kg/m<sup>2</sup>  
**Temp. range dry:** 4÷80 °C  
**Temp. range wet:** 4÷65 °C  
**Pin material:** PP blu  
**Hardness of Grip top Rubber:** 50 ShA

#### MX - Code 03

Performance PBT

**Max w. load:** 21000 N/m  
**Weight:** 10,6 kg/m<sup>2</sup>  
**Temp. range dry:** -40÷120 °C  
**Temp. range wet:** -40÷60 °C  
**Pin material:** POM grey  
**Hardness of Grip top Rubber:** 50 ShA

### Version A - Standard

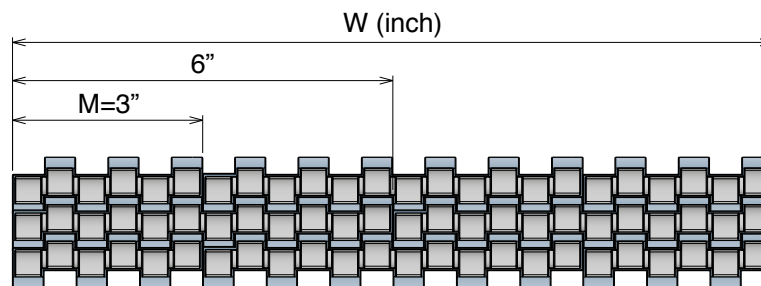

### Version A - Standard

Series	Material	Width	Version
5323	*	0003	A
5323	*	0006	A
5323	*	0009	A
5323	*	0012	A
5323	*	0015	A
5323	*	0018	A
5323	*	0021	A
5323	*	0024	A
5323	*	0027	A
5323	*	0030	A
5323	*	0033	A
5323	*	0036	A
5323	*	0039	A
5323	*	0042	A
5323	*	0045	A
5323	*	0048	A
5323	*	0051	A
5323	*	0054	A

Tappeti modulari / Modular belts / Mattenketten

## 530 GT Side indent Tappeto Modulare 530 GT, H=8,7 M=3" Modular Belt Series 530 GT, H=8,7 M=3" / Modulare Mattenkette 530 GT, H=8,7 M=3"



### CODE STRUCTURE GUIDE

(Example)

<b>5325</b>	<b>01</b>	<b>0027</b>	<b>A-S</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 30 mm

**15.0mm**  
PITCH

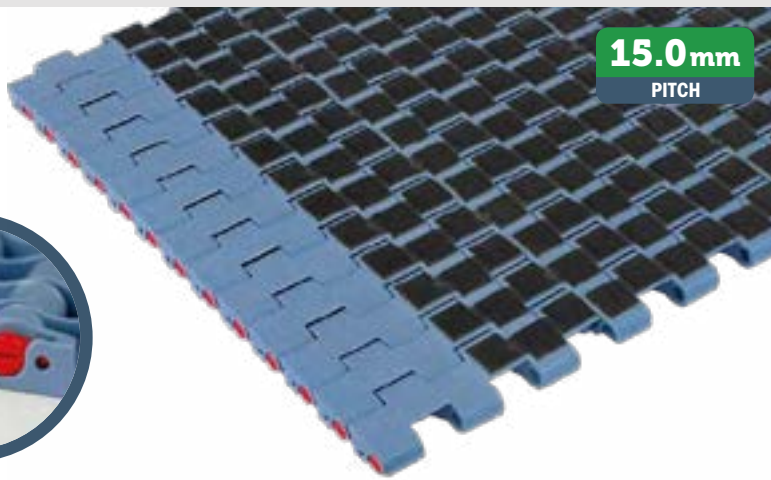

Imperial Size

### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

**Max w. load:** 26000 N/m  
**Weight:** 10,6 kg/m<sup>2</sup>  
**Temp. range dry:** -40÷80 °C  
**Temp. range wet:** -40÷65 °C  
**Pin material:** PBT white  
**Hardness of Grip top Rubber:** 50 ShA

#### PP - Code 02

Polypropylene


**Max w. load:** 16000 N/m  
**Weight:** 9,0 kg/m<sup>2</sup>  
**Temp. range dry:** 4÷80 °C  
**Temp. range wet:** 4÷65 °C  
**Pin material:** PP blu  
**Hardness of Grip top Rubber:** 50 ShA

#### MX - Code 03

Performance PBT

**Max w. load:** 21000 N/m  
**Weight:** 10,6 kg/m<sup>2</sup>  
**Temp. range dry:** -40÷120 °C  
**Temp. range wet:** -40÷60 °C  
**Pin material:** POM grey  
**Hardness of Grip top Rubber:** 50 ShA

### Version A - Standard

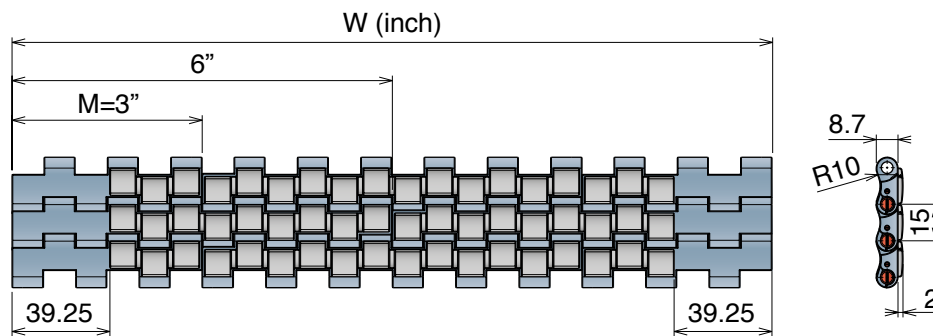

### Version A - Standard

Series	Material	Width	Version
5325	*	0009	A
5325	*	0012	A
5325	*	0015	A
5325	*	0018	A
5325	*	0021	A
5325	*	0024	A
5325	*	0027	A
5325	*	0030	A
5325	*	0033	A
5325	*	0036	A
5325	*	0039	A
5325	*	0042	A
5325	*	0045	A
5325	*	0048	A
5325	*	0051	A
5325	*	0054	A

# 530 LBP

Tappeti modulari / Modular belts / Mattenketten

Imperial Size

## 530 LBP




Tappeto Modulare 530 LBP, H=8,7 M=3"


Modular Belt Series 530 LBP, H=8,7 M=3" / Modulare Mattenkette 530 LBP, H=8,7 M=3"

CODE STRUCTURE GUIDE			
(Example)			
5324	01	0012	A
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0 mm**  
PITCH

		
pg. 271	pg. 516->524	pg. 489

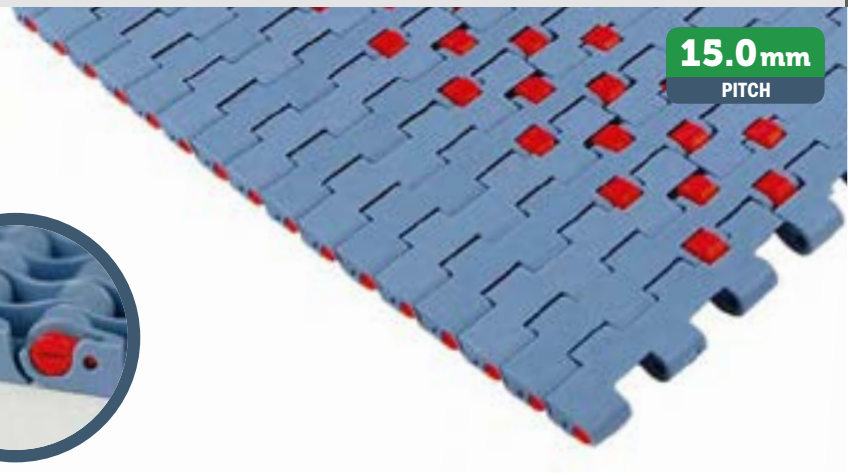

### \*Material

### LFA - Code 01


Low friction Acetal

**Max w. load:** 24000 N/m  
**Weight:** 8,7 kg/m<sup>2</sup>  
**Temp. range dry:** -40÷80 °C  
**Temp. range dry:** -40÷65 °C  
**Pin material:** PBT white

### Roller

**Material:** POM Red  
**Density:** 700 rollers/m<sup>2</sup>


### Version A - Standard

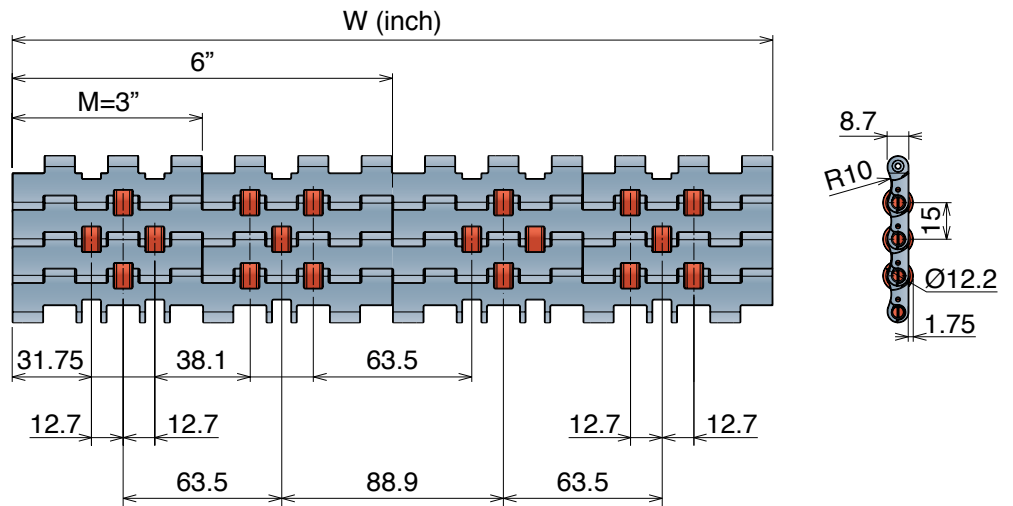


### Version A - Standard

Series	Material	Width	Version
5324	*	0006	A
5324	*	0012	A
5324	*	0018	A
5324	*	0024	A
5324	*	0030	A
5324	*	0036	A
5324	*	0042	A
5324	*	0048	A
5324	*	0054	A

### Guide position for accumulation system - Example

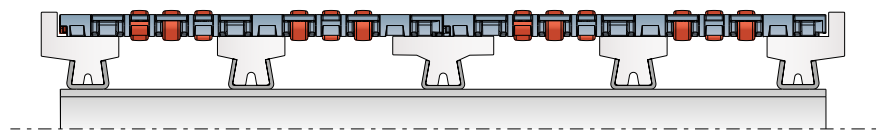

### Guide position for driven rollers, for alignment/distribution system - Example

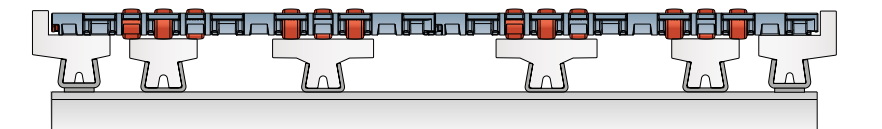

## Advantages:

- ▶ Less Noise
- ▶ Head Drive
- ▶ Short Transfer
- ▶ Less energy consumption
- ▶ Center Drive

Tappeti modulari / Modular belts / Mattenketten

# 550

Pitch 25,4 mm

H= 8,7 mm



550 FT

550 FT *One track Belt*

550 FTT

550 FG

550 FG *One track Belt*

550 GT

550 GT *Side indent*

550 PRO FT

550 PRO M

## 550 FT

Tappeto Modulare 550 FT, H=8,7 M=85  
Modular Belt Series 550 FT, H=8,7 M=85 / Modulare Mattenkette 550 FT, H=8,7 M=85



### CODE STRUCTURE GUIDE

(Example)

<b>5221</b>	<b>01</b>	<b>0255</b>	<b>A</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4 mm**  
PITCH

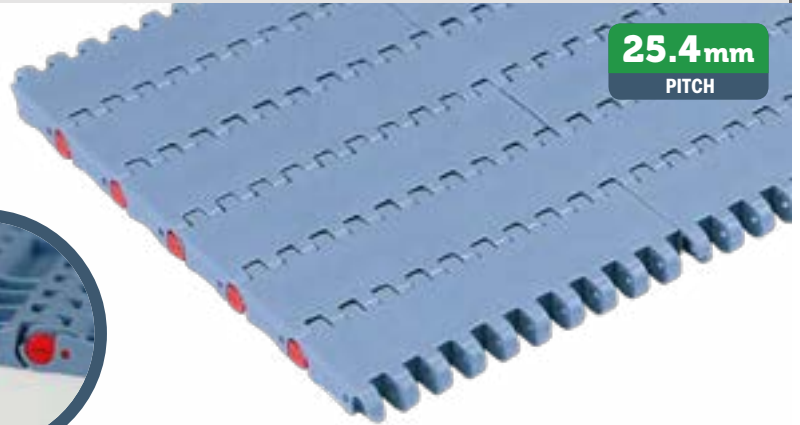

### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 27500 N/m  
Weight: 8,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

#### PP - Code 02

Polypropylene

Max w. load: 16500 N/m  
Weight: 8,4 kg/m<sup>2</sup>  
Temp. range dry: 4+80 °C  
Temp. range wet: 4+65 °C  
Pin material: PP blu

#### MX - Code 03

Performance PBT

Max w. load: 22000 N/m  
Weight: 8,2 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey

#### DKM - Code 16

Aramide Reinforced Acetal

Max w. load: 27500 N/m  
Weight: 8,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

#### MWX - Code 17

Polyamide Composite

Max w. load: 27500 N/m  
Weight: 8,9 kg/m<sup>2</sup>  
Temp. range dry: -40+104 °C  
Temp. range wet: NR  
Pin material: PBT white


#### PFX - Code 30

Extra performance PBT


Max w. load: 22000 N/m  
Weight: 8,2 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey

**THE BEST CHOICE FOR  
DRY RUNNING APPLICATIONS**


### Version A - Standard

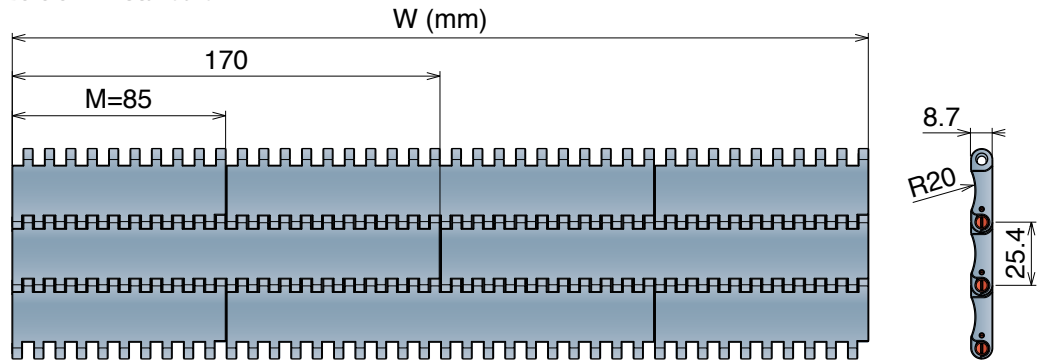

### Version B - With 1 Positioner

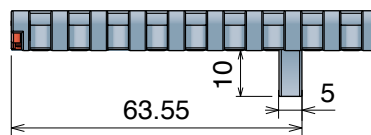

### Version C - With 2 Positioners

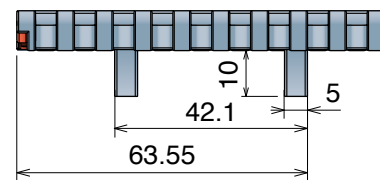

### Version A - Standard

Series	Material	Width	Version
5221	*	0085	A
5221	*	0170	A
5221	*	0255	A
5221	*	0340	A
5221	*	0425	A
5221	*	0510	A
5221	*	0595	A
5221	*	0680	A
5221	*	0765	A
5221	*	0850	A
5221	*	0935	A
5221	*	1020	A
5221	*	1105	A
5221	*	1190	A
5221	*	1275	A
5221	*	1360	A
5221	*	1445	A
5221	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5221	*	0085	B
5221	*	0170	B
5221	*	0255	B
5221	*	0340	B
5221	*	0425	B
5221	*	0510	B
5221	*	0595	B
5221	*	0680	B
5221	*	0765	B
5221	*	0850	B
5221	*	0935	B
5221	*	1020	B
5221	*	1105	B
5221	*	1190	B
5221	*	1275	B
5221	*	1360	B
5221	*	1445	B
5221	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5221	*	0085	C
5221	*	0170	C
5221	*	0255	C
5221	*	0340	C
5221	*	0425	C
5221	*	0510	C
5221	*	0595	C
5221	*	0680	C
5221	*	0765	C
5221	*	0850	C
5221	*	0935	C
5221	*	1020	C
5221	*	1105	C
5221	*	1190	C
5221	*	1275	C
5221	*	1360	C
5221	*	1445	C
5221	*	1530	C

## 550 FT One track Belt

Tappeto Modulare 550 FT, H=8,7 K330  
Modular Belt Series 550 FT, H=8,7 K330 / Modulare Mattenkette 550 FT, H=8,7 K330

### CODE STRUCTURE GUIDE


(Example)

5221	03	9330	A
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4mm**  
PITCH

Metric Size

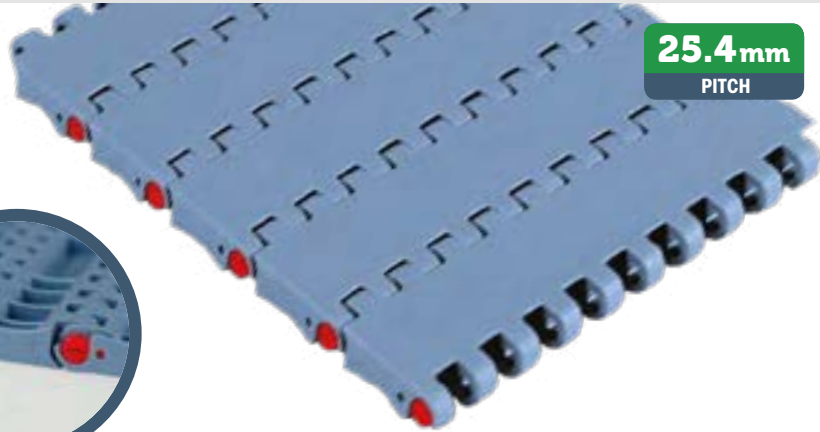

### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 27500 N/m  
Weight: 8,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

#### PP - Code 02

Polypropylene

Max w. load: 16500 N/m  
Weight: 8,4 kg/m<sup>2</sup>  
Temp. range dry: 4+80 °C  
Temp. range wet: 4+65 °C  
Pin material: PP blu

#### MX - Code 03

Performance PBT

Max w. load: 22000 N/m  
Weight: 8,2 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey

#### DKM - Code 16

Aramide Reinforced Acetal

Max w. load: 27500 N/m  
Weight: 8,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

#### MWX - Code 17

Polyamide Composite

Max w. load: 27500 N/m  
Weight: 8,9 kg/m<sup>2</sup>  
Temp. range dry: -40+104 °C  
Temp. range wet: NR  
Pin material: PBT white


#### PFX - Code 30

Extra performance PBT


Max w. load: 22000 N/m  
Weight: 8,2 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey

**THE BEST CHOICE FOR  
DRY RUNNING APPLICATIONS**

### Version A - Standard

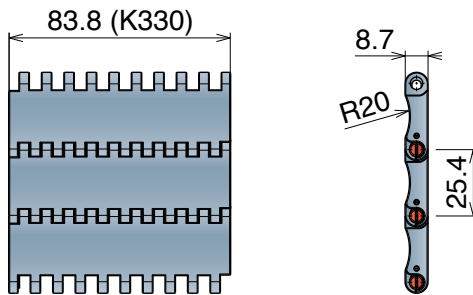

### Version C - With 2 Positioner

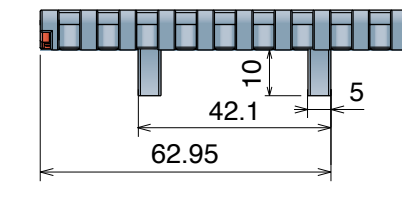

### Version A - Standard

Series	Material	Width	Version
5221	*	9330	A

### Version C - With 2 Positioners

Series	Material	Width	Version
5221	*	9330	C

## 550 FTT


Tappeto Modulare 550 FTT, H=8,7 M=85

Modular Belt Series 550 FTT, H=8,7 M=85 / Modulare Mattenkette 550 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5226	03	0255	CN
Series	*Material	Width	Version

Backflex radius min.: 25 mm


**25.4mm**  
PITCH



pg. 273-274

pg. 516->524

pg. 490

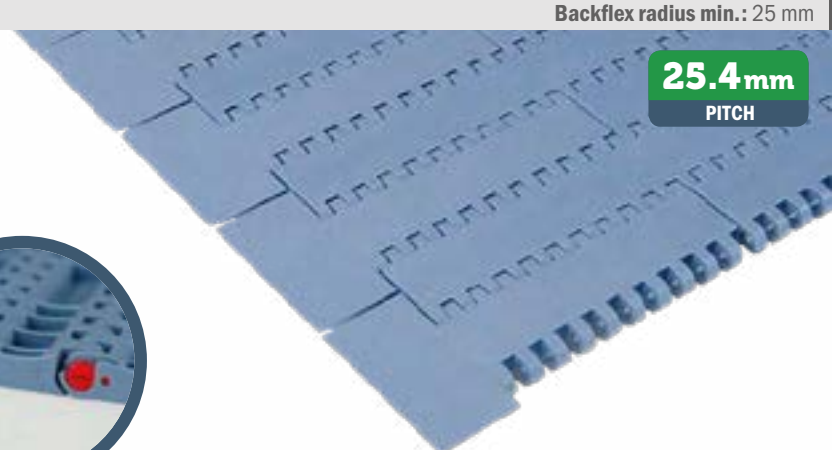

### \*Material

#### LFA - Code 01

Low friction Acetal


Max w. load: 27500 N/m  
Weight: 8,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

#### MX - Code 03


Performance PBT

Max w. load: 22000 N/m  
Weight: 8,2 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey

### Version C

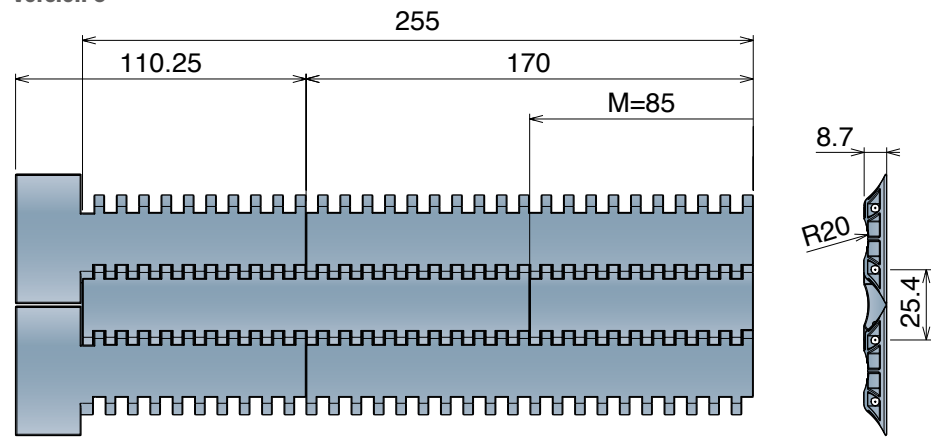

### Version CN - Near

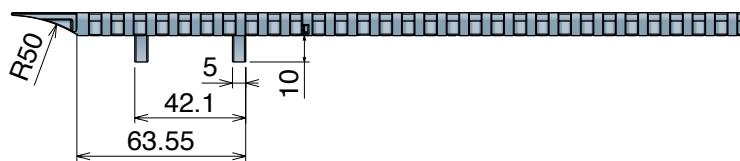

### Version CO - Opposite



### Version C

Series	Material	Width	Version
5226	*	0085	C

### Version CN - Near

Series	Material	Width	Version
5226	*	0170	CN
5226	*	0255	CN

### Version CO - Opposite

Series	Material	Width	Version
5226	*	0170	CO
5226	*	0255	CO



On request available with bigger/different width

## 550 FG Open Surface 25% Tappeto Modulare 550 FG, H=8,7 M=85 Modular Belt Series 550 FG, H=8,7 M=85 / Modulare Mattenkette 550 FG, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5222	01	0850	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4mm**  
PITCH



Metric Size

**\*Material**  
**LFA - Code 01**  
Low friction Acetal  
**Easy Delivery**

Max w. load: 27500 N/m  
Weight: 7,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

**MX - Code 03**  
Performance PBT


Max w. load: 22000 N/m  
Weight: 6,7 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey

**PFX - Code 30**  
Extra performance PBT


Max w. load: 22000 N/m  
Weight: 6,7 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey

**THE BEST CHOICE FOR DRY RUNNING APPLICATIONS**


### Version A - Standard

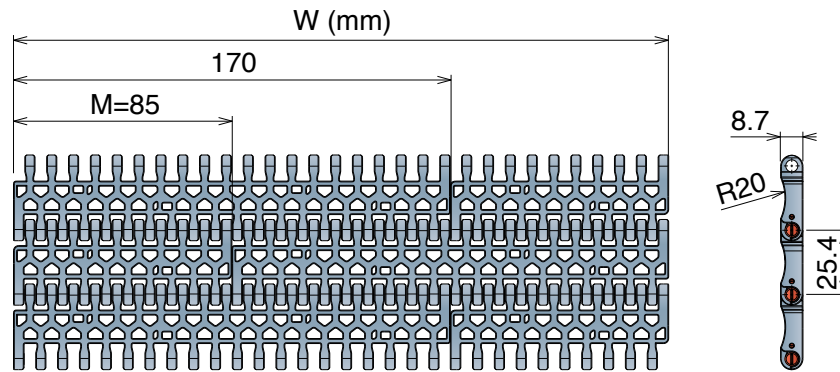

### Version B - With 1 Positioner

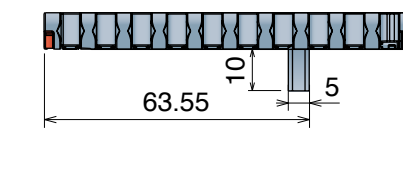

### Version C - With 2 Positioners

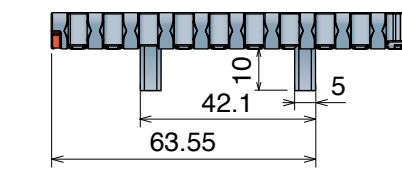

### Version A - Standard

Series	Material	Width	Version
5222	*	0085	A
5222	*	0170	A
5222	*	0255	A
5222	*	0340	A
5222	*	0425	A
5222	*	0510	A
5222	*	0595	A
5222	*	0680	A
5222	*	0765	A
5222	*	0850	A
5222	*	0935	A
5222	*	1020	A
5222	*	1105	A
5222	*	1190	A
5222	*	1275	A
5222	*	1360	A
5222	*	1445	A
5222	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5222	*	0085	B
5222	*	0170	B
5222	*	0255	B
5222	*	0340	B
5222	*	0425	B
5222	*	0510	B
5222	*	0595	B
5222	*	0680	B
5222	*	0765	B
5222	*	0850	B
5222	*	0935	B
5222	*	1020	B
5222	*	1105	B
5222	*	1190	B
5222	*	1275	B
5222	*	1360	B
5222	*	1445	B
5222	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5222	*	0085	C
5222	*	0170	C
5222	*	0255	C
5222	*	0340	C
5222	*	0425	C
5222	*	0510	C
5222	*	0595	C
5222	*	0680	C
5222	*	0765	C
5222	*	0850	C
5222	*	0935	C
5222	*	1020	C
5222	*	1105	C
5222	*	1190	C
5222	*	1275	C
5222	*	1360	C
5222	*	1445	C
5222	*	1530	C



# 550 FG One track Belt

Tappeti modulari / Modular belts / Mattenketten

Metric Size

## 550 FG One track Belt Open Surface 25% Tappeto Modulare 550 FG, H=8,7 K330 Modular Belt Series 550 FG, H=8,7 K330 / Modulare Mattenkette 550 FG, H=8,7 K330



### CODE STRUCTURE GUIDE

(Example)

<b>5222</b>	<b>01</b>	<b>9330</b>	<b>A</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4 mm**  
PITCH



### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 27500 N/m  
Weight: 7,0 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

#### MX - Code 03

Performance PBT

Max w. load: 22000 N/m  
Weight: 6,7 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey


#### PFX - Code 30

Extra performance PBT


Max w. load: 22000 N/m  
Weight: 6,7 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey

**THE BEST CHOICE FOR  
DRY RUNNING APPLICATIONS**

### Version A - Standard

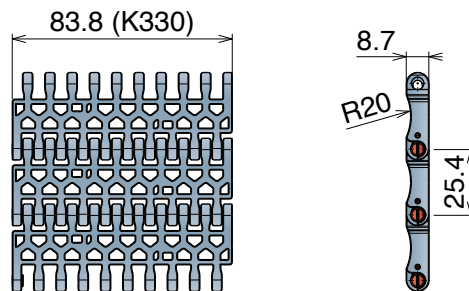

### Version C - With 2 Positioner

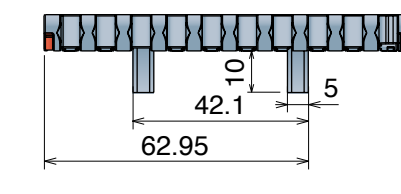

### Version A - Standard

Series	Material	Width	Version
5222	*	9330	A

### Version C - With 2 Positioners

Series	Material	Width	Version
5222	*	9330	C

# 550 GT

Tappeto Modulare 550 GT, H=8,7 M=85  
 Modular Belt Series 550 GT, H=8,7 M=85 / Modulare Mattenkette 550 GT, H=8,7 M=85

### CODE STRUCTURE GUIDE

(Example)

<b>5223</b>	<b>01</b>	<b>1020</b>	<b>A-S</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 30 mm

**25.4mm**  
PITCH

- pg. 273-274
- pg. 516->524
- pg. 490



Metric Size

### \*Material

#### LFA - Code 01

Low friction Acetal

- Max w. load: 27500 N/m
- Weight: 10,1 kg/m<sup>2</sup>
- Temp. range dry: -40÷80 °C
- Temp. range wet: -40÷65 °C
- Pin material: PBT white
- Hardness of
- Grip top Rubber: 50 Sha

#### PP - Code 02

Polypropylene


- Max w. load: 16500 N/m
- Weight: 8,4 kg/m<sup>2</sup>
- Temp. range dry: 4÷80 °C
- Temp. range wet: 4÷65 °C
- Pin material: PP blu
- Hardness of
- Grip top Rubber: 50 Sha

#### MX - Code 03


Performance PBT

- Max w. load: 21500 N/m
- Weight: 10,5 kg/m<sup>2</sup>
- Temp. range dry: -40÷120 °C
- Temp. range wet: -40÷60 °C
- Pin material: POM grey
- Hardness of
- Grip top Rubber: 50 Sha


### Version A - Standard

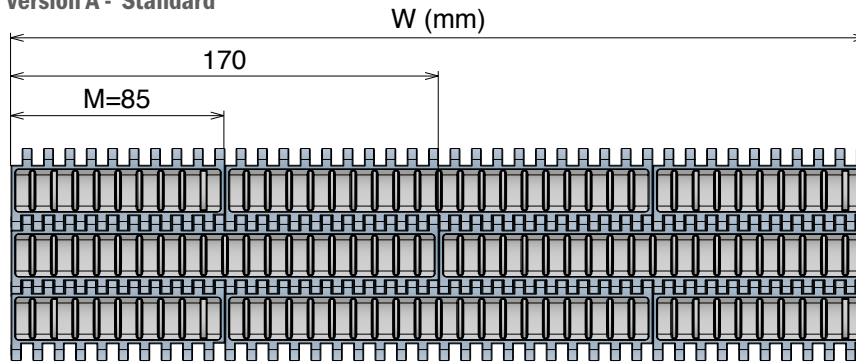

### Version B - With 1 Positioner

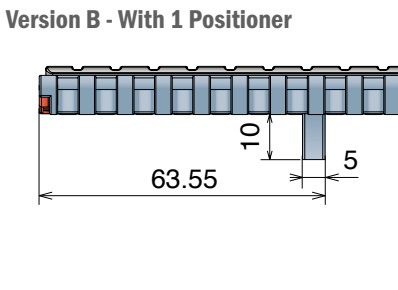

### Version C - With 2 Positioners

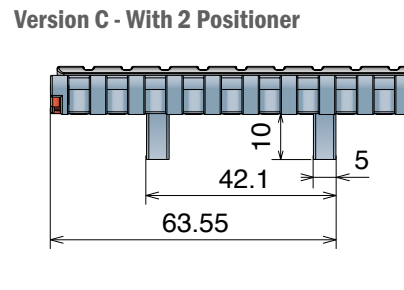

### Version A - Standard

Series	Material	Width	Version
5223	*	0085	A
5223	*	0170	A
5223	*	0255	A
5223	*	0340	A
5223	*	0425	A
5223	*	0510	A
5223	*	0595	A
5223	*	0680	A
5223	*	0765	A
5223	*	0850	A
5223	*	0935	A
5223	*	1020	A
5223	*	1105	A
5223	*	1190	A
5223	*	1275	A
5223	*	1360	A
5223	*	1445	A
5223	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5223	*	0085	B
5223	*	0170	B
5223	*	0255	B
5223	*	0340	B
5223	*	0425	B
5223	*	0510	B
5223	*	0595	B
5223	*	0680	B
5223	*	0765	B
5223	*	0850	B
5223	*	0935	B
5223	*	1020	B
5223	*	1105	B
5223	*	1190	B
5223	*	1275	B
5223	*	1360	B
5223	*	1445	B
5223	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5223	*	0085	C
5223	*	0170	C
5223	*	0255	C
5223	*	0340	C
5223	*	0425	C
5223	*	0510	C
5223	*	0595	C
5223	*	0680	C
5223	*	0765	C
5223	*	0850	C
5223	*	0935	C
5223	*	1020	C
5223	*	1105	C
5223	*	1190	C
5223	*	1275	C
5223	*	1360	C
5223	*	1445	C
5223	*	1530	C

# 550 GT Side indent

Tappeti modulari / Modular belts / Mattenketten

Metric Size

## 550 GT Side indent Tappeto Modulare 550 GT, H=8,7 M=85 Modular Belt Series 550 GT, H=8,7 M=85 / Modulare Mattenkette 550 GT, H=8,7 M=85


### CODE STRUCTURE GUIDE

(Example)

<b>5225</b>	<b>01</b>	<b>0595</b>	<b>B-S</b>
Series	*Material	Width	Version

Backflex radius min.: 30 mm


**25.4mm**  
PITCH



pg. 273-274

pg. 516->524

pg. 490

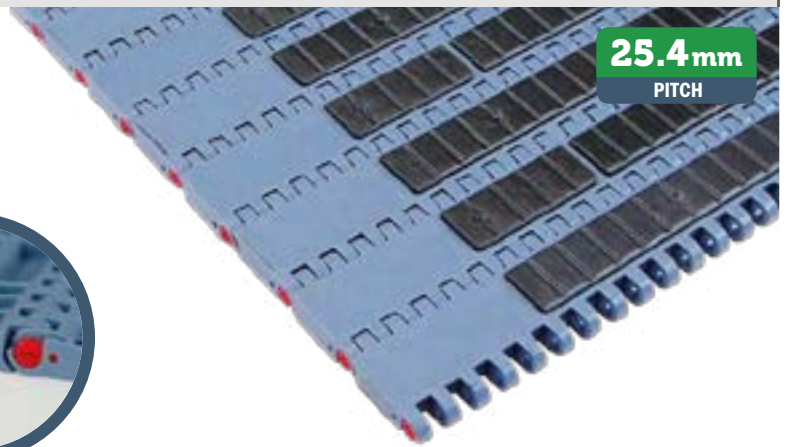

### \*Material

#### LFA - Code 01

Low friction Acetal

Max w. load: 27500 N/m  
Weight: 10,1 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white  
Hardness of  
Grip top Rubber: 50 ShA

#### PP - Code 02

Polypropylene


Max w. load: 16500 N/m  
Weight: 8,4 kg/m<sup>2</sup>  
Temp. range dry: 4÷80 °C  
Temp. range wet: 4÷65 °C  
Pin material: PP blu  
Hardness of  
Grip top Rubber: 50 ShA

#### MX - Code 03


Performance PBT

Max w. load: 21500 N/m  
Weight: 10,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey  
Hardness of  
Grip top Rubber: 50 ShA


### Version A - Standard

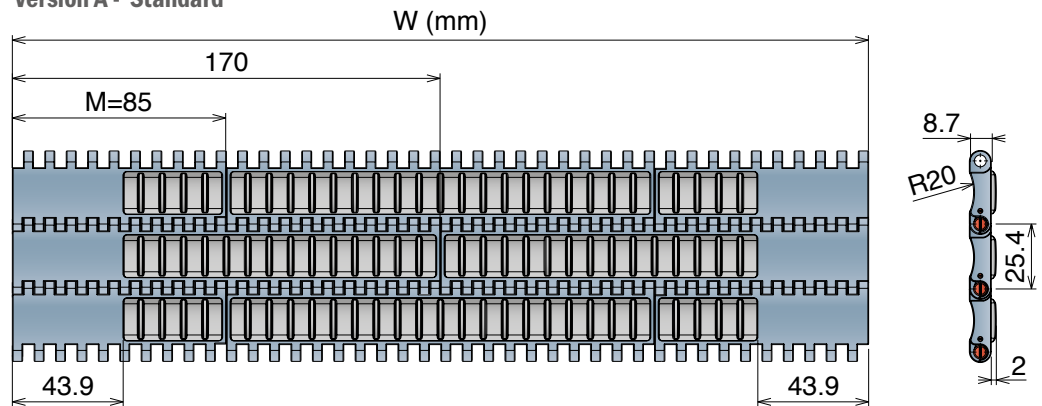

### Version B - With 1 Positioner

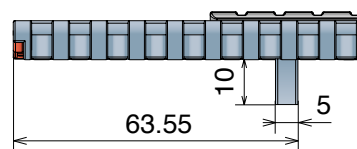

### Version C - With 2 Positioners

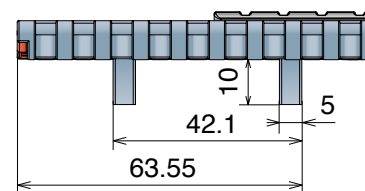

### Version A - Standard

Series	Material	Width	Version
5225	*	0255	A
5225	*	0340	A
5225	*	0425	A
5225	*	0510	A
5225	*	0595	A
5225	*	0680	A
5225	*	0765	A
5225	*	0850	A
5225	*	0935	A
5225	*	1020	A
5225	*	1105	A
5225	*	1190	A
5225	*	1275	A
5225	*	1360	A
5225	*	1445	A
5225	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5225	*	0255	B
5225	*	0340	B
5225	*	0425	B
5225	*	0510	B
5225	*	0595	B
5225	*	0680	B
5225	*	0765	B
5225	*	0850	B
5225	*	0935	B
5225	*	1020	B
5225	*	1105	B
5225	*	1190	B
5225	*	1275	B
5225	*	1360	B
5225	*	1445	B
5225	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5225	*	0255	C
5225	*	0340	C
5225	*	0425	C
5225	*	0510	C
5225	*	0595	C
5225	*	0680	C
5225	*	0765	C
5225	*	0850	C
5225	*	0935	C
5225	*	1020	C
5225	*	1105	C
5225	*	1190	C
5225	*	1275	C
5225	*	1360	C
5225	*	1445	C
5225	*	1530	C

## 550 PRO FT

Tappeto Modulare 550 PRO FT, H=8,7 K330  
 Modular Belt Series 550 PRO FT, H=8,7 K330 / Modulare Mattenkette 550 PRO FT, H=8,7 K330


### CODE STRUCTURE GUIDE

(Example)

<b>5227</b>	<b>30</b>	<b>9330</b>	<b>A</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 25 mm

**25.4mm**  
PITCH

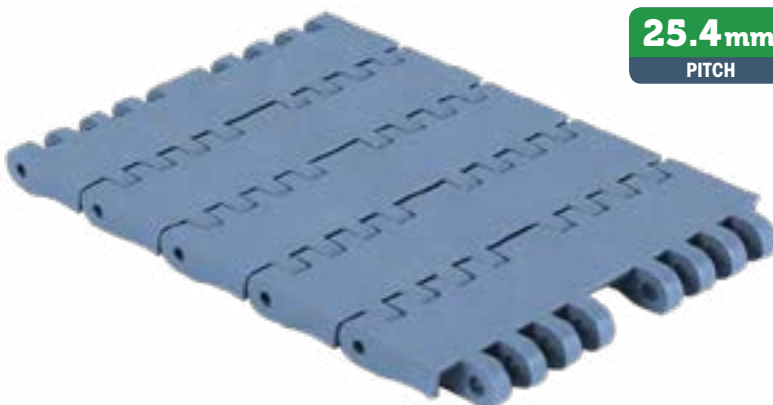

Metric Size



pg. 275-276

pg. 516->524

### \*Material

#### LFA - Code 01

Low friction Acetal

#### Easy Delivery

Max w. load: 27500 N/m  
 Weight: 8,5 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

#### MX - Code 03

Performance PBT


Max w. load: 22000 N/m  
 Weight: 8,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

#### PFX - Code 30


Extra performance PBT

Max w. load: 22000 N/m  
 Weight: 8,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

### Version A - Standard

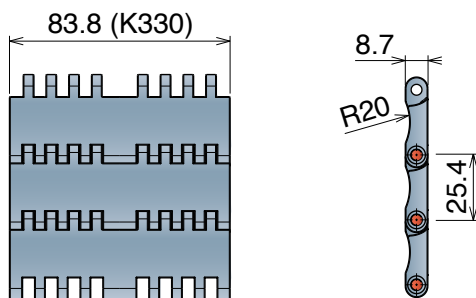

### Version C - With 2 Positioner

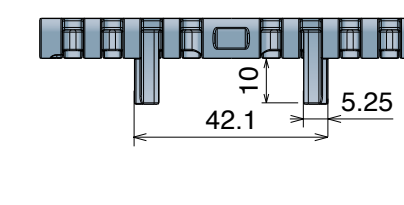

### Version A - Standard

Series	Material	Width	Version
5227	*	9330	A

### Version C - With 2 Positioners

Series	Material	Width	Version
5227	*	9330	C

**THE BEST CHOICE FOR  
 DRY RUNNING APPLICATIONS**

## 550 PRO M

Tappeto Modulare 550 PRO M, H=8,7 K330  
 Modular Belt Series 550 PRO M, H=8,7 K330 / Modulare Mattenkette 550 PRO M, H=8,7 K330





### CODE STRUCTURE GUIDE


(Example)

<b>5228</b>	<b>30</b>	<b>9330</b>	<b>C</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 15 mm

**25.4 mm**  
PITCH

 10 feet 3.048 m	 pg. 275-276	 pg. 162	 pg. 516->524
240 links			

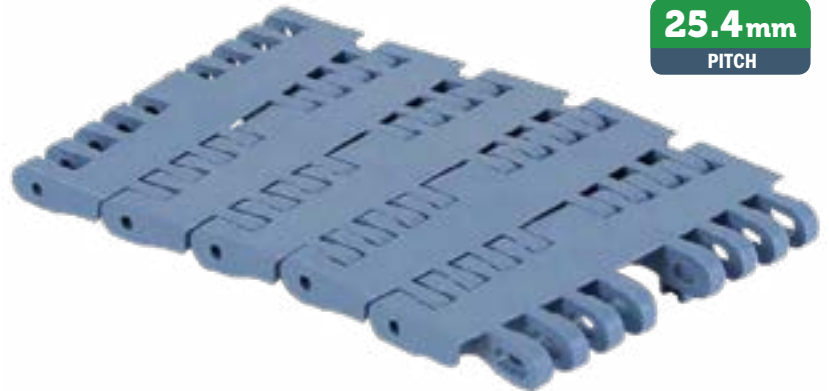

### Magnetic System

#### \*Material

#### LFA - Code 01

Low friction Acetal

#### Easy Delivery

**Max w. load:** 30000 N/m  
**Weight:** 8,2 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** Ferritic  
 Stainless Steel

#### MX - Code 03

Performance PBT

**Max w. load:** 24000 N/m  
**Weight:** 8,0 kg/m<sup>2</sup>  
**Temp. range dry:** -40+120 °C  
**Temp. range wet:** -40+60 °C  
**Pin material:** Ferritic  
 Stainless Steel


#### PFX - Code 30

Extra performance PBT

**Max w. load:** 24000 N/m  
**Weight:** 8,0 kg/m<sup>2</sup>  
**Temp. range dry:** -40+120 °C  
**Temp. range wet:** -40+60 °C  
**Pin material:** Ferritic  
 Stainless Steel

**THE BEST CHOICE FOR  
 DRY RUNNING APPLICATIONS**

#### Version C - With 2 Positioner

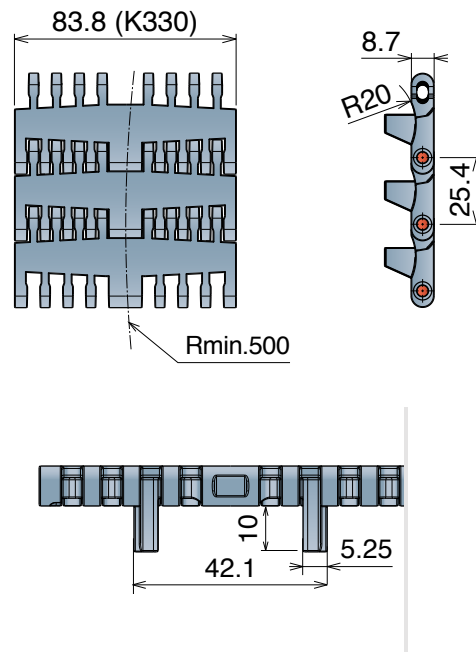

#### Version C - With 2 Positioners

Series	Material	Width	Version
5228	*	9330	C

# 551

Pitch 25,4 mm

H= 12,7 mm



Metric Size

551 FT

551 FTT

551 GT

551 GT *Side indent*

551 LBP

551 PRO LBP

## 551 FT

Tappeto Modulare 551 FT, H=12,7 M=85  
Modular Belt Series 551 FT, H=12,7 M=85 / Modulare Mattenkette 551 FT, H=12,7 M=85

### CODE STRUCTURE GUIDE

(Example)

<b>5231</b>	<b>01</b>	<b>0680</b>	<b>C</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4 mm**  
PITCH

### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 41500 N/m  
Weight: 12,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

#### PP - Code 02

Polypropylene

Max w. load: 27000 N/m  
Weight: 10,0 kg/m<sup>2</sup>  
Temp. range dry: 4÷80 °C  
Temp. range wet: 4÷65 °C  
Pin material: PP blu

#### MX - Code 03

Performance PBT

Max w. load: 33500 N/m  
Weight: 12,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey

#### DKM - Code 16

Aramide Reinforced Acetal

Max w. load: 41500 N/m  
Weight: 12,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

#### MWX - Code 17

Polyamide Composite

Max w. load: 41500 N/m  
Weight: 13,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷104 °C  
Temp. range wet: NR  
Pin material: PBT white

#### MPX - Code 25

Lubricated Acetal

Max w. load: 41500 N/m  
Weight: 12,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

#### PFX - Code 30


Extra performance PBT

Max w. load: 33500 N/m  
Weight: 12,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey


**THE BEST CHOICE FOR  
DRY RUNNING APPLICATIONS**




Version A - Standard

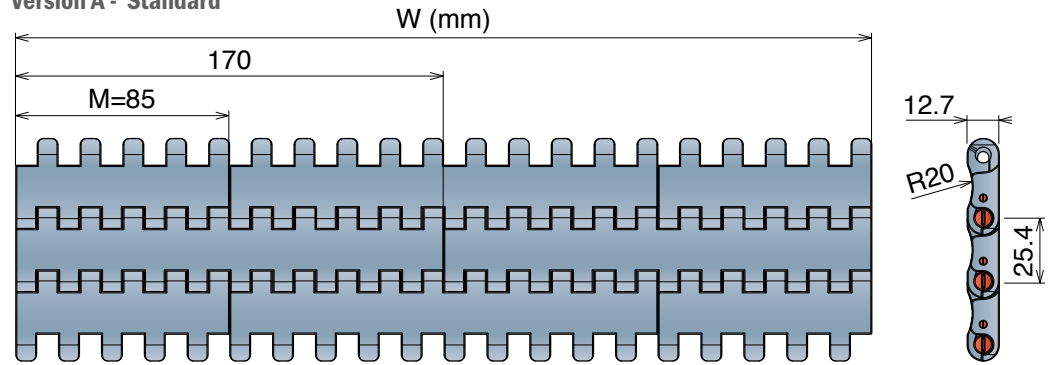

Version B - With 1 Positioner

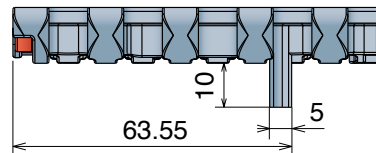

Version C - With 2 Positioner

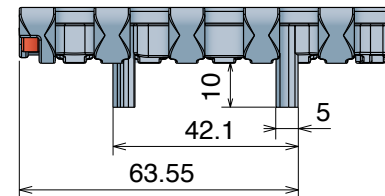

Version A - Standard

Series	Material	Width	Version
5231	*	0085	A
5231	*	0170	A
5231	*	0255	A
5231	*	0340	A
5231	*	0425	A
5231	*	0510	A
5231	*	0595	A
5231	*	0680	A
5231	*	0765	A
5231	*	0850	A
5231	*	0935	A
5231	*	1020	A
5231	*	1105	A
5231	*	1190	A
5231	*	1275	A
5231	*	1360	A
5231	*	1445	A
5231	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5231	*	0085	B
5231	*	0170	B
5231	*	0255	B
5231	*	0340	B
5231	*	0425	B
5231	*	0510	B
5231	*	0595	B
5231	*	0680	B
5231	*	0765	B
5231	*	0850	B
5231	*	0935	B
5231	*	1020	B
5231	*	1105	B
5231	*	1190	B
5231	*	1275	B
5231	*	1360	B
5231	*	1445	B
5231	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5231	*	0085	C
5231	*	0170	C
5231	*	0255	C
5231	*	0340	C
5231	*	0425	C
5231	*	0510	C
5231	*	0595	C
5231	*	0680	C
5231	*	0765	C
5231	*	0850	C
5231	*	0935	C
5231	*	1020	C
5231	*	1105	C
5231	*	1190	C
5231	*	1275	C
5231	*	1360	C
5231	*	1445	C
5231	*	1530	C

# 551 FTT




Tappeto Modulare 551 FTT, H=12,7 M=85

Modular Belt Series 551 FTT, H=12,7 M=85 / Modulare Mattenkette 551 FTT, H=12,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5236	01	0085	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4mm**  
PITCH

		
pg. 277-278	pg. 516->524	pg. 491



Metric Size

### \*Material

#### LFA - Code 01

Low friction Acetal

Max w. load: 41500 N/m  
Weight: 12,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

#### MX - Code 03

Performance PBT


Max w. load: 33500 N/m  
Weight: 12,0 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey

#### MPX - Code 25


Lubricated Acetal

Max w. load: 41500 N/m  
Weight: 12,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white


### Version C

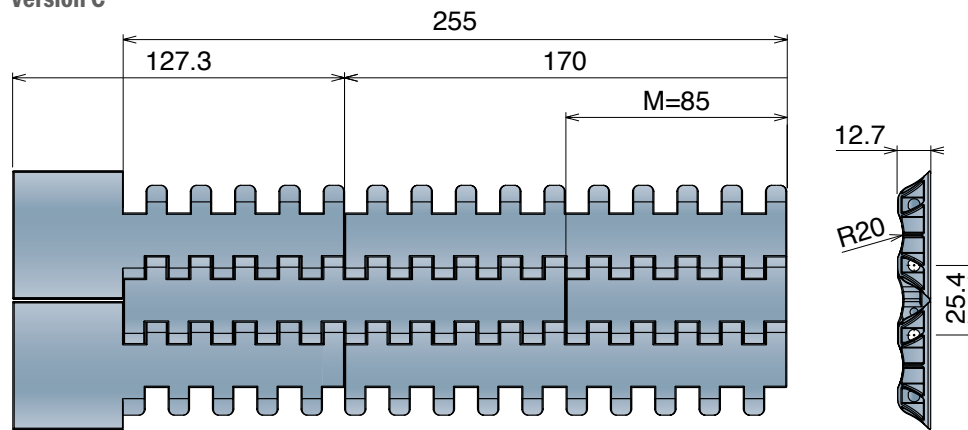

### Version CN - Near

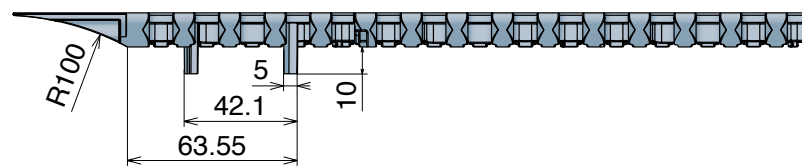

### Version C0 - Opposite

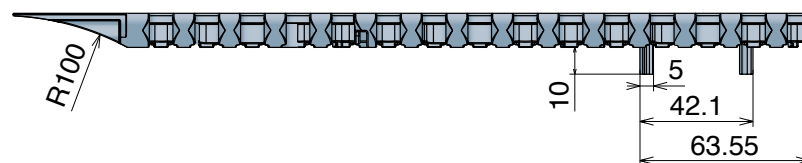

### Version C

Series	Material	Width	Version
5236	*	0085	C

### Version CN - Near

Series	Material	Width	Version
5236	*	0170	CN
5236	*	0255	CN

### Version C0 - Opposite

Series	Material	Width	Version
5236	*	0170	C0
5236	*	0255	C0

On request available with bigger/different width



# 551 GT

Tappeti modulari / Modular belts / Mattenketten

Metric Size

## 551 GT


Tappeto Modulare 551 GT, H=12,7 M=85

Modular Belt Series 551 GT, H=12,7 M=85 / Modulare Mattenkette 551 GT, H=12,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
<b>5233</b>	<b>01</b>	<b>0255</b>	<b>B-S</b>
Series	*Material	Width	Version

Backflex radius min.: 50 mm

**25.4 mm**  
PITCH



### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 41500 N/m  
Weight: 13,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white  
Hardness of  
Grip top Rubber: 50 ShA

#### PP - Code 02

Polypropylene


Max w. load: 27000 N/m  
Weight: 11,0 kg/m<sup>2</sup>  
Temp. range dry: 4+80 °C  
Temp. range wet: 4+65 °C  
Pin material: PP blu  
Hardness of  
Grip top Rubber: 50 ShA

#### MX - Code 03


Performance PBT

Max w. load: 33500 N/m  
Weight: 12,7 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey  
Hardness of  
Grip top Rubber: 50 ShA


### Version A - Standard

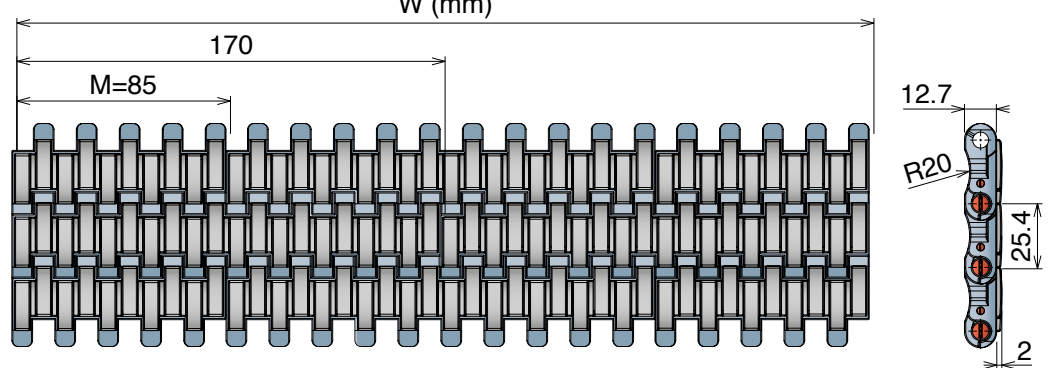

### Version B - With 1 Positioner

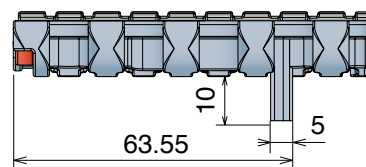

### Version C - With 2 Positioners

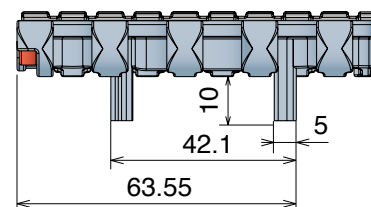

### Version A - Standard

Series	Material	Width	Version
5233	*	0085	A
5233	*	0170	A
5233	*	0255	A
5233	*	0340	A
5233	*	0425	A
5233	*	0510	A
5233	*	0595	A
5233	*	0680	A
5233	*	0765	A
5233	*	0850	A
5233	*	0935	A
5233	*	1020	A
5233	*	1105	A
5233	*	1190	A
5233	*	1275	A
5233	*	1360	A
5233	*	1445	A
5233	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5233	*	0085	B
5233	*	0170	B
5233	*	0255	B
5233	*	0340	B
5233	*	0425	B
5233	*	0510	B
5233	*	0595	B
5233	*	0680	B
5233	*	0765	B
5233	*	0850	B
5233	*	0935	B
5233	*	1020	B
5233	*	1105	B
5233	*	1190	B
5233	*	1275	B
5233	*	1360	B
5233	*	1445	B
5233	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5233	*	0085	C
5233	*	0170	C
5233	*	0255	C
5233	*	0340	C
5233	*	0425	C
5233	*	0510	C
5233	*	0595	C
5233	*	0680	C
5233	*	0765	C
5233	*	0850	C
5233	*	0935	C
5233	*	1020	C
5233	*	1105	C
5233	*	1190	C
5233	*	1275	C
5233	*	1360	C
5233	*	1445	C
5233	*	1530	C

## 551 GT Side indent Tappeto Modulare 551 GT, H=12,7 M=85

Modular Belt Series 551 GT, H=12,7 M=85 / Modulare Mattenkette 551 GT, H=12,7 M=85



### CODE STRUCTURE GUIDE

(Example)

5235	01	0765	A-S
Series	*Material	Width	Version

Backflex radius min.: 50 mm

**25.4mm**  
PITCH

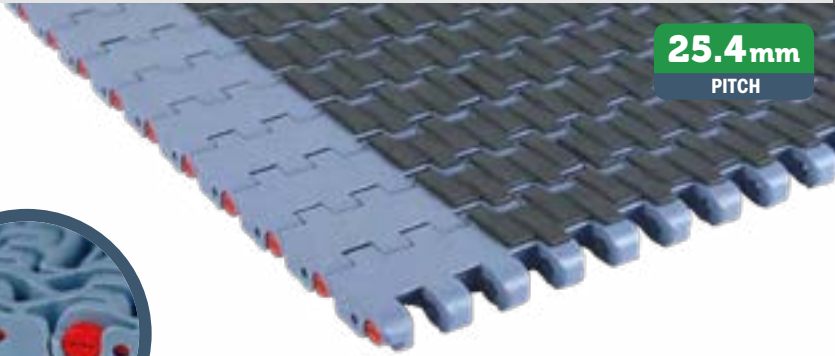

Metric Size

### \*Material

#### LFA - Code 01

Low friction Acetal

#### Easy Delivery

Max w. load: 41500 N/m  
Weight: 13,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white  
Hardness of  
Grip top Rubber: 50 ShA

#### PP - Code 02

Polypropylene


Max w. load: 27000 N/m  
Weight: 11,0 kg/m<sup>2</sup>  
Temp. range dry: 4÷80 °C  
Temp. range wet: 4÷65 °C  
Pin material: PP blu  
Hardness of  
Grip top Rubber: 50 ShA

#### MX - Code 03


Performance PBT

Max w. load: 33500 N/m  
Weight: 12,7 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey  
Hardness of  
Grip top Rubber: 50 ShA


### Version A - Standard

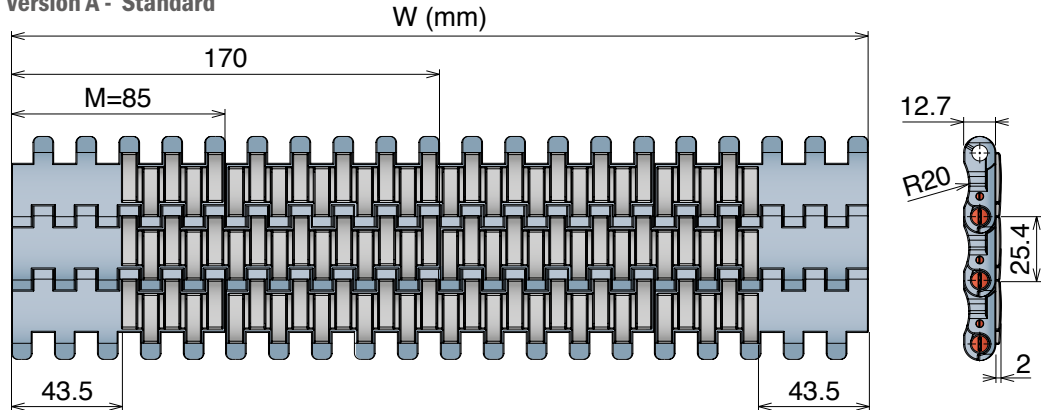

### Version B - With 1 Positioner

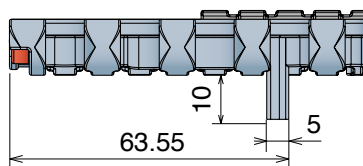

### Version C - With 2 Positioner

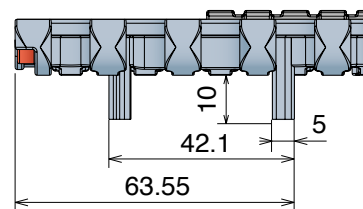

### Version A - Standard

Series	Material	Width	Version
5235	*	0255	A
5235	*	0340	A
5235	*	0425	A
5235	*	0510	A
5235	*	0595	A
5235	*	0680	A
5235	*	0765	A
5235	*	0850	A
5235	*	0935	A
5235	*	1020	A
5235	*	1105	A
5235	*	1190	A
5235	*	1275	A
5235	*	1360	A
5235	*	1445	A
5235	*	1530	A

### Version B - With 1 Positioner

Series	Material	Width	Version
5235	*	0255	B
5235	*	0340	B
5235	*	0425	B
5235	*	0510	B
5235	*	0595	B
5235	*	0680	B
5235	*	0765	B
5235	*	0850	B
5235	*	0935	B
5235	*	1020	B
5235	*	1105	B
5235	*	1190	B
5235	*	1275	B
5235	*	1360	B
5235	*	1445	B
5235	*	1530	B

### Version C - With 2 Positioners

Series	Material	Width	Version
5235	*	0255	C
5235	*	0340	C
5235	*	0425	C
5235	*	0510	C
5235	*	0595	C
5235	*	0680	C
5235	*	0765	C
5235	*	0850	C
5235	*	0935	C
5235	*	1020	C
5235	*	1105	C
5235	*	1190	C
5235	*	1275	C
5235	*	1360	C
5235	*	1445	C
5235	*	1530	C

## 551 LBP



Tappeto Modulare 551 LBP, H=12,7 M=85

Modular Belt Series 551 LBP, H=12,7 M=85 / Modulare Mattenkette 551 LBP, H=12,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5234	01	0425	A
Series	*Material	Width	Version

Backflex radius min.: 120 mm


**25.4mm**  
PITCH

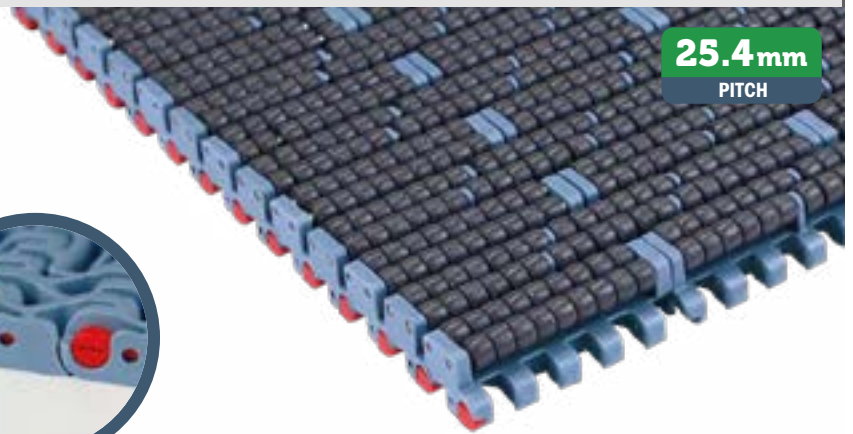


\*Material  
**LFA - Code 01**  
Low friction Acetal

Max w. load: 41500 N/m  
Weight: 26,9 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white


Version A - Standard

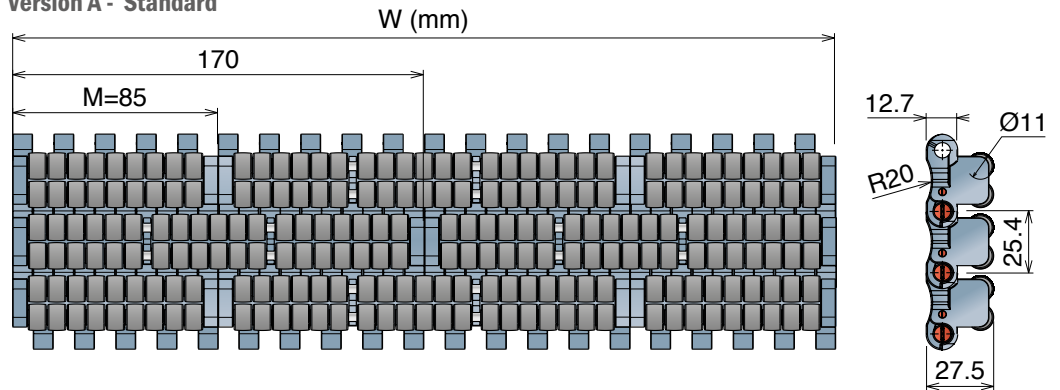

Version B - With 1 Positioner



Version C - With 2 Positioner



Version A - Standard

Series	Material	Width	Version
5234	*	0085	A
5234	*	0170	A
5234	*	0255	A
5234	*	0340	A
5234	*	0425	A
5234	*	0510	A
5234	*	0595	A
5234	*	0680	A
5234	*	0765	A
5234	*	0850	A
5234	*	0935	A
5234	*	1020	A
5234	*	1105	A
5234	*	1190	A
5234	*	1275	A
5234	*	1360	A
5234	*	1445	A
5234	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5234	*	0085	B
5234	*	0170	B
5234	*	0255	B
5234	*	0340	B
5234	*	0425	B
5234	*	0510	B
5234	*	0595	B
5234	*	0680	B
5234	*	0765	B
5234	*	0850	B
5234	*	0935	B
5234	*	1020	B
5234	*	1105	B
5234	*	1190	B
5234	*	1275	B
5234	*	1360	B
5234	*	1445	B
5234	*	1530	B


Version C - With 2 Positioners

Series	Material	Width	Version
5234	*	0085	C
5234	*	0170	C
5234	*	0255	C
5234	*	0340	C
5234	*	0425	C
5234	*	0510	C
5234	*	0595	C
5234	*	0680	C
5234	*	0765	C
5234	*	0850	C
5234	*	0935	C
5234	*	1020	C
5234	*	1105	C
5234	*	1190	C
5234	*	1275	C
5234	*	1360	C
5234	*	1445	C
5234	*	1530	C

# 551 PRO LBP

Modular Belt Series 551 PRO LBP H=12.15 M=85

Metric Size

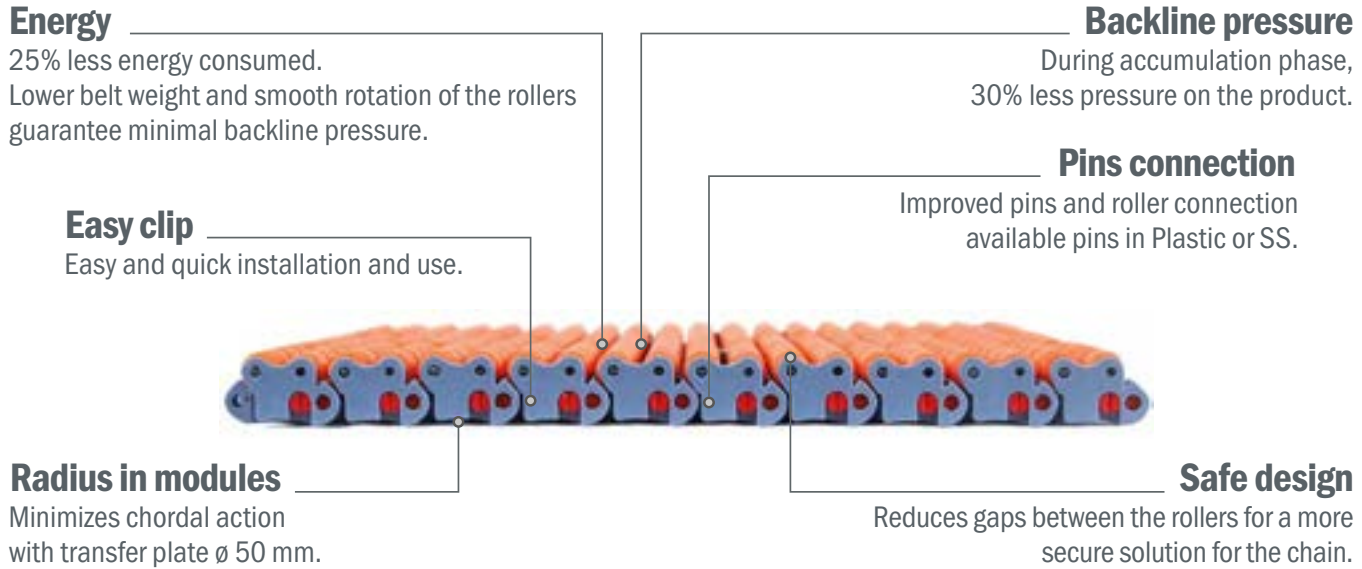


**551 PRO LBP**, the new concept of accumulation: less noise, smaller in-line transfer area and lighter than the standard LBP chains and belts. These features offer an advantage in energy consumption, reduced friction and noise level.

**551 PRO LBP** is designed with a finger protection device between the modules.


## The Difference with a standard LBP

GAPS BETWEEN ROLLERS




**PRO** Standard LBP chain

HEADSHAFT TENSION



**PRO** Standard LBP chain

BACKLINE PRESSURE



**PRO** Standard LBP chain



### High performance

- -30% Backline pressure
- Improved roller and pins connection
- Smaller head to tail transfers



### Best Safety

- Small gaps between rollers, to protect operator
- Permanently fixed roller pins
- Improved low noise



### Energy saving

- Low chain weight
- Reduction of friction
- Wearstrips in **BluLub** are recommended

Check with the Movex application department the possibilities to use it.

# 551 PRO LBP

Tappeti modulari / Modular belts / Mattenketten

Metric Size

## 551 PRO LBP


Tappeto Modulare 551 PRO LBP, H=12,7 M=85

Modular Belt Series 551 PRO LBP, H=12,7 M=85 / Modulare Mattenkette 551 PRO LBP, H=12,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5240	01	0425	A
Series	*Material	Width	Version

Backflex radius min.: 100 mm

**25.4 mm**  
PITCH



### Standard with PFX rollers


Material
<b>LFA - Code 01</b> Low friction Acetal
Easy Delivery
Max w. load: 41500 N/m
Weight SS pin: 13,8 kg/m <sup>2</sup>
Weight Plastic pin: 11,0 kg/m <sup>2</sup>
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

#### PFX Roller


THE BEST CHOICE FOR  
DRY RUNNING APPLICATIONS

Patented


Version A - Standard

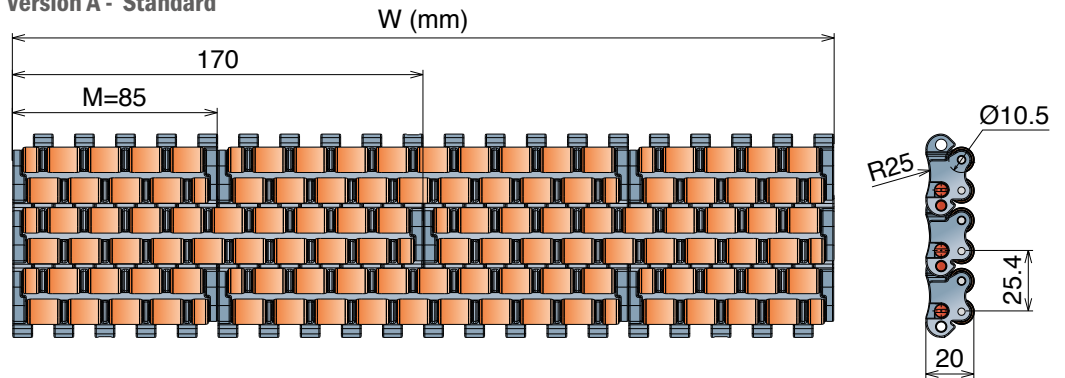

Version B - With 1 Positioner

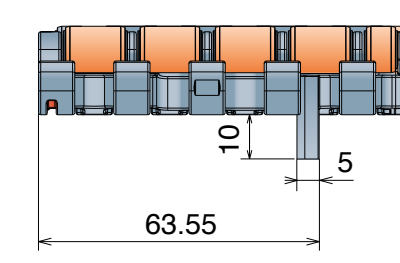

Version C - With 2 Positioner

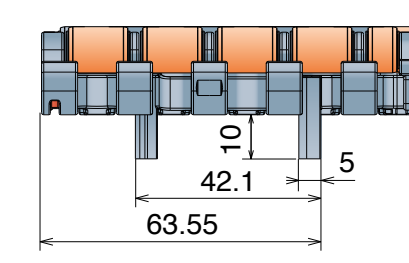

Stainless steel Pin

Series	Material	Width	*Version
5239	01	0085	*
5239	01	0170	*
5239	01	0255	*
5239	01	0340	*
5239	01	0425	*
5239	01	0510	*
5239	01	0595	*
5239	01	0680	*



Plastic Pin

Series	Material	Width	*Version
5240	01	0085	*
5240	01	0170	*
5240	01	0255	*
5240	01	0340	*
5240	01	0425	*
5240	01	0510	*
5240	01	0595	*
5240	01	0680	*

\*Version

Standard    Add A    |    With 1 Positioner    Add B    |    With 2 Positioners    Add C

# 552

Pitch 25,4 mm  
H= 12,7 mm



- 552 FT
- 552 FT *One track Belt*
- 552 FTT
- 552 PT
- 552 PT *One track Belt*
- 552 GT

552 GT *Side indent*

# 552 FT

Tappeti modulari / Modular belts / Mattenketten

Imperial Size



## 552 FT

Tappeto Modulare 552 FT, H=12,7 M=3"  
Modular Belt Series 552 FT, H=12,7 M=3" / Modulare Mattenkette 552 FT, H=12,7 M=3"

CODE STRUCTURE GUIDE			
(Example)			
<b>5341</b>	<b>01</b>	<b>0021</b>	<b>A</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4 mm**  
PITCH

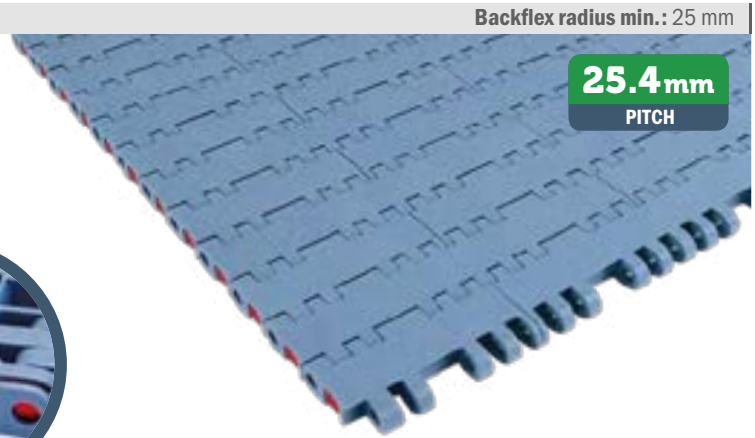

### \*Material

**LFA - Code 01**  
Low friction Acetal

Easy Delivery

Max w. load: 41500 N/m  
Weight: 13,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

**MX - Code 03**  
Performance PBT

Max w. load: 33500 N/m  
Weight: 13,0 kg/m<sup>2</sup>  
Temp. range dry: -40+120 °C  
Temp. range wet: -40+60 °C  
Pin material: POM grey


**MWX - Code 17**  
Polyamide Composite

Max w. load: 41500 N/m  
Weight: 14,0 kg/m<sup>2</sup>  
Temp. range dry: -40+104 °C  
Temp. range wet: NR  
Pin material: PBT white

**MPX - Code 25**  
Lubricated Acetal

Max w. load: 41500 N/m  
Weight: 13,5 kg/m<sup>2</sup>  
Temp. range dry: -40+80 °C  
Temp. range wet: -40+65 °C  
Pin material: PBT white

### Version A - Standard

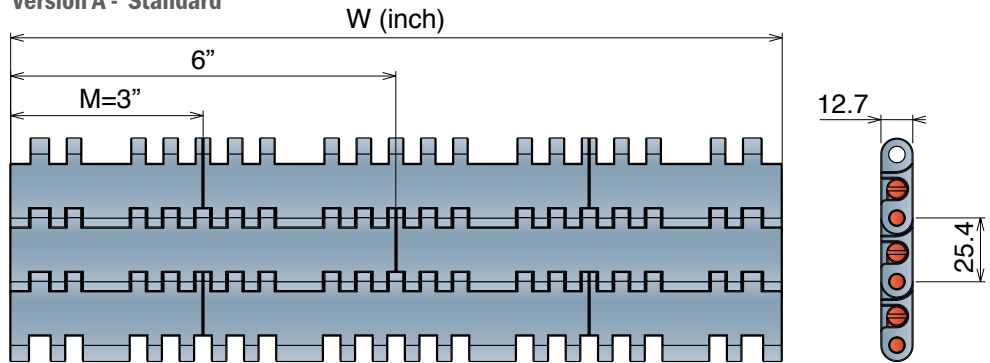

### Version A - Standard

Series	Material	Width	Version
5341	*	0009	A
5341	*	0012	A
5341	*	0015	A
5341	*	0018	A
5341	*	0021	A
5341	*	0024	A
5341	*	0027	A
5341	*	0030	A
5341	*	0033	A
5341	*	0036	A
5341	*	0039	A
5341	*	0042	A
5341	*	0045	A
5341	*	0048	A
5341	*	0051	A
5341	*	0054	A

Tappeti modulari / Modular belts / Mattenketten




## 552 FT One track Belt


Tappeto Modulare 552 FT, H=12,7  
Modular Belt Series 552 FT, H=12,7 / Modulare Mattenkette 552 FT, H=12,7

CODE STRUCTURE GUIDE			
(Example)			
<b>5341</b>	<b>01</b>	<b>0003</b>	<b>A</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4mm**  
PITCH

 pg. 279	 pg. 516->524	 pg. 493
---	--	---

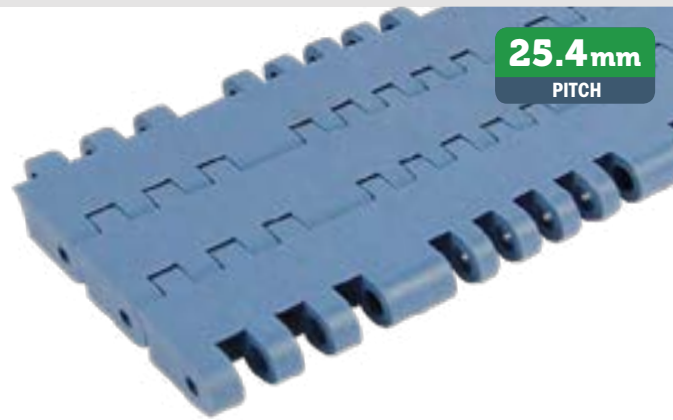

Imperial Size

\*Material

### LFA - Code 01

Low friction Acetal

Easy Delivery



Max w. load: 41500 N/m  
Weight: 13,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

### MX - Code 03


Performance PBT

Max w. load: 33500 N/m  
Weight: 13,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey

Version A - Standard



Version C - With 2 Positioner

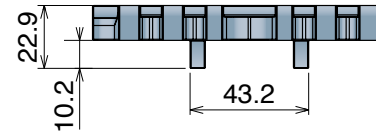

### MWX - Code 17

Polyamide Composite

Max w. load: 41500 N/m  
Weight: 14,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷104 °C  
Temp. range wet: NR  
Pin material: PBT white

### MPX - Code 25

Lubricated Acetal

Max w. load: 41500 N/m  
Weight: 13,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

**K300** - One track belt



Series	Material	Width	Version
5341	*	0003	A
5341	*	0003	C

**K325** - One track belt



Series	Material	Width	Version
5341	*	9325	A
5341	*	9325	C

**K450** - One track belt



Series	Material	Width	Version
5341	*	9450	A
5341	*	9450	C

**K600** - One track belt



Series	Material	Width	Version
5341	*	0006	A
5341	*	0006	C

**K750** - One track belt



Series	Material	Width	Version
5341	*	9750	A
5341	*	9750	C

Tappeti modulari / Modular belts / Mattenketten






## 552 FTT


Tappeto Modulare 552 FTT, H=12,7  
Modular Belt Series 552 FTT, H=12,7 / Modulare Mattenkette 552 FTT, H=12,7

CODE STRUCTURE GUIDE			
(Example)			
5346	01	9450	C-R
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4 mm**  
PITCH

		
pg. 279	pg. 516->524	pg. 493

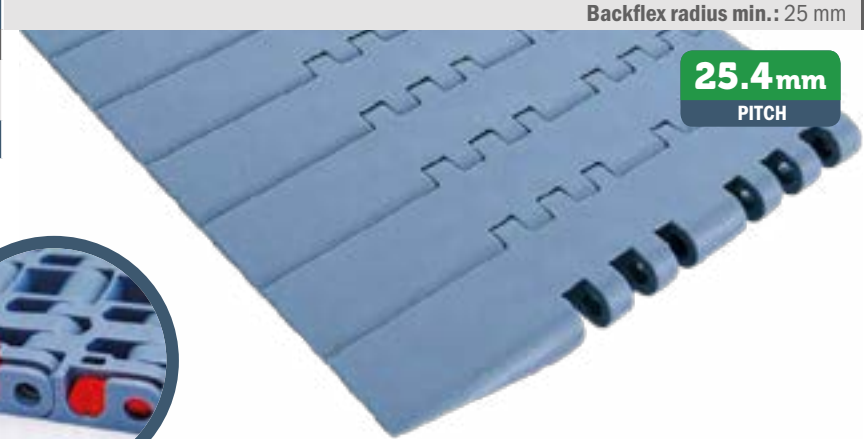

### \*Material

#### LFA - Code 01 Low friction Acetal

Max w. load: 41500 N/m  
Weight: 13,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

#### MX - Code 03 Performance PBT

Max w. load: 33500 N/m  
Weight: 13,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey



#### MWX - Code 17 Polyamide Composite

Max w. load: 41500 N/m  
Weight: 14,0 kg/m<sup>2</sup>  
Temp. range dry: -40÷104 °C  
Temp. range wet: NR  
Pin material: PBT white

#### MPX - Code 25 Lubricated Acetal


Max w. load: 41500 N/m  
Weight: 13,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

### 552 FTT - DX Version

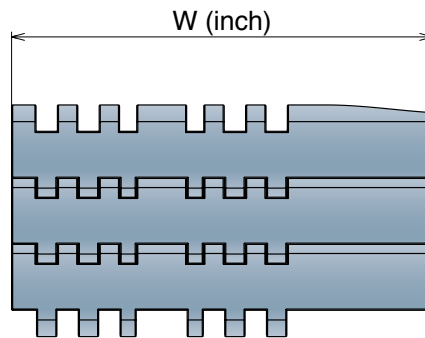



### K450 / K750

Series	Material	Width	Version	Total width
5346	*	9450	C - R	160.3
5346	*	9750	C - R	237.4




### 552 FTT - SX Version

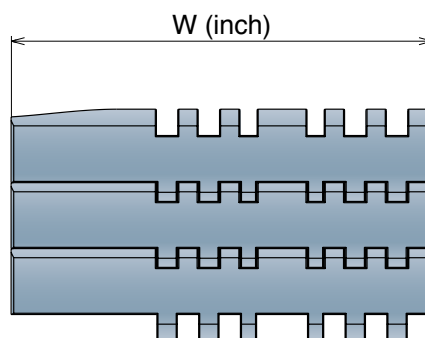

### K450 / K750

Series	Material	Width	Version	Total width
5346	*	9450	C - L	160.3
5346	*	9750	C - L	237.4



## 552 PT Open Surface 8% Tappeto Modulare 552 PT, H=12,7 M=3" / Modular Belt Series 552 PT, H=12,7 M=3" / Modulare Mattenkette 552 PT, H=12,7 M=3"

### CODE STRUCTURE GUIDE

(Example)

<b>5342</b>	<b>01</b>	<b>0009</b>	<b>A</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 25 mm

**25.4mm**  
PITCH




pg. 279



pg. 516->524



pg. 492

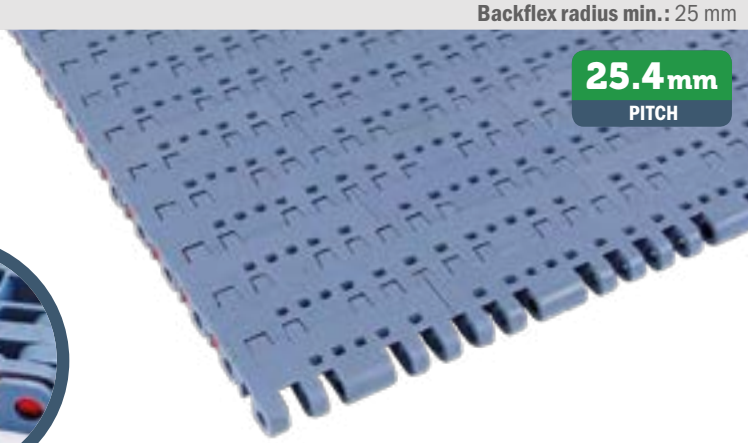

Imperial Size

### \*Material

#### LFA - Code 01

Low friction Acetal

**Max w. load:** 41500 N/m  
**Weight:** 13,2 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white

#### MX - Code 03

Performance PBT

**Max w. load:** 33500 N/m  
**Weight:** 12,7 kg/m<sup>2</sup>  
**Temp. range dry:** -40+120 °C  
**Temp. range wet:** -40+60 °C  
**Pin material:** POM grey

#### MWX - Code 17

Polyamide Composite


**Max w. load:** 41500 N/m  
**Weight:** 13,7 kg/m<sup>2</sup>  
**Temp. range dry:** -40+104 °C  
**Temp. range wet:** NR  
**Pin material:** PBT white

#### MPX - Code 25

Lubricated Acetal

**Max w. load:** 41500 N/m  
**Weight:** 13,2 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white

### Version A - Standard

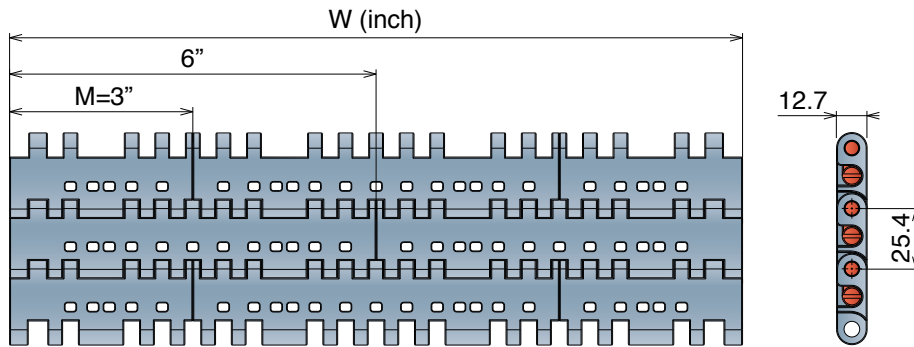

### Version A - Standard

Series	Material	Width	Version
5342	*	0009	A
5342	*	0012	A
5342	*	0015	A
5342	*	0018	A
5342	*	0021	A
5342	*	0024	A
5342	*	0027	A
5342	*	0030	A
5342	*	0033	A
5342	*	0036	A
5342	*	0039	A
5342	*	0042	A
5342	*	0045	A
5342	*	0048	A
5342	*	0051	A
5342	*	0054	A

# 552 PT One track Belt

Tappeti modulari / Modular belts / Mattenketten

Imperial Size

## 552 PT One track Belt Open Surface 8% Tappeto Modulare 552 PT, H=12,7 M=3" Modular Belt Series 552 PT, H=12,7 M=3" / Modulare Mattenkette 552 PT, H=12,7 M=3"

### CODE STRUCTURE GUIDE

(Example)

<b>5342</b>	<b>01</b>	<b>0003</b>	<b>A</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 25 mm

**25.4 mm**  
PITCH



pg. 279



pg. 516->524



### \*Material

#### LFA - Code 01

*Low friction Acetal*

**Max w. load:** 41500 N/m  
**Weight:** 13,2 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white

#### MX - Code 03

*Performance PBT*

**Max w. load:** 33500 N/m  
**Weight:** 12,7 kg/m<sup>2</sup>  
**Temp. range dry:** -40+120 °C  
**Temp. range wet:** -40+60 °C  
**Pin material:** POM grey

#### MWX - Code 17

*Polyamide Composite*


**Max w. load:** 41500 N/m  
**Weight:** 13,7 kg/m<sup>2</sup>  
**Temp. range dry:** -40+104 °C  
**Temp. range wet:** NR  
**Pin material:** PBT white

#### MPX - Code 25


*Lubricated Acetal*

**Max w. load:** 41500 N/m  
**Weight:** 13,2 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white

### Version A - Standard

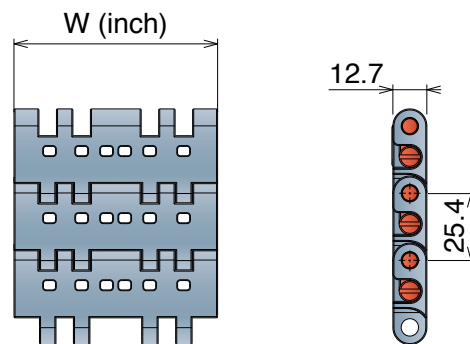

### Version C - With 2 Positioner



### Version A - Standard

Series	Material	Width	Version
5342	*	0003	A
5342	*	0006	A

### Version C - With 2 Positioners

Series	Material	Width	Version
5342	*	0003	C
5342	*	0006	C

Tappeti modulari / Modular belts / Mattenketten

## 552 GT

Tappeto Modulare 552 GT, H=12,7 M=3"

Modular Belt Series 552 GT, H=12,7 M=3" / Modulare Mattenkette 552 GT, H=12,7 M=3"

### CODE STRUCTURE GUIDE

(Example)

5343	01	0009	A-S
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4mm**  
PITCH



pg. 279



pg. 516->524



pg. 492



Imperial Size

### \*Material

#### LFA - Code 01

Low friction Acetal


Max w. load: 41500 N/m  
Weight: 15,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white  
Hardness of  
Grip top Rubber: 50 ShA

#### PP - Code 02

Polypropylene

Max w. load: 27000 N/m  
Weight: 13,5 kg/m<sup>2</sup>  
Temp. range dry: 4÷80 °C  
Temp. range wet: 4÷65 °C  
Pin material: PP blu  
Hardness of  
Grip top Rubber: 50 ShA

### Version A - Standard

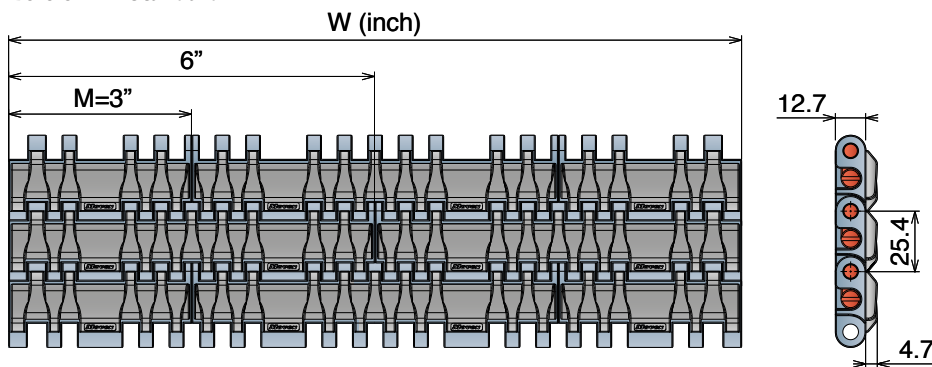

### Version A - Standard

Series	Material	Width	Version
5343	*	0009	A
5343	*	0012	A
5343	*	0015	A
5343	*	0018	A
5343	*	0021	A
5343	*	0024	A
5343	*	0027	A
5343	*	0030	A
5343	*	0033	A
5343	*	0036	A
5343	*	0039	A
5343	*	0042	A
5343	*	0045	A
5343	*	0048	A
5343	*	0051	A
5343	*	0054	A



Rubber Thickness 4.7 mm

Tappeti modulari / Modular belts / Mattenketten

# 552 GT Side indent

Tappeti modulari / Modular belts / Mattenketten

Imperial Size

## 552 GT Side indent Tappeto Modulare 552 GT SI, H=12,7 M=3" Modular Belt Series 552 GT SI, H=12,7 M=3" / Modulare Mattenkette 552 GT SI, H=12,7 M=3"

### CODE STRUCTURE GUIDE

(Example)

5345	01	0009	A-S
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4 mm**  
PITCH




pg. 279



pg. 516->524



pg. 492

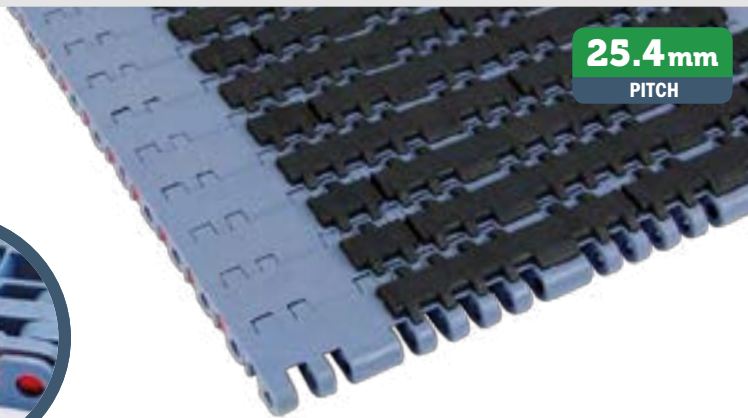

### \*Material

#### LFA - Code 01

Low friction Acetal

**Max w. load:** 41500 N/m  
**Weight:** 15,5 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white  
**Hardness of**  
**Grip top Rubber:** 50 ShA


#### PP - Code 02

Polypropylene

**Max w. load:** 27000 N/m  
**Weight:** 13,5 kg/m<sup>2</sup>  
**Temp. range dry:** 4+80 °C  
**Temp. range wet:** 4+65 °C  
**Pin material:** PP blu  
**Hardness of**  
**Grip top Rubber:** 50 ShA

Available also with  
75 ShA Rubber

### Version A - Standard

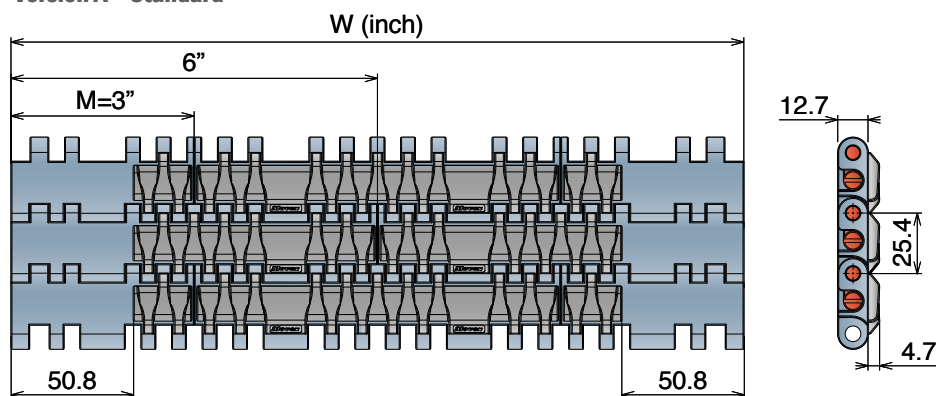

### Version A - Standard

Series	Material	Width	Version
5345	*	0009	A
5345	*	0012	A
5345	*	0015	A
5345	*	0018	A
5345	*	0021	A
5345	*	0024	A
5345	*	0027	A
5345	*	0030	A
5345	*	0033	A
5345	*	0036	A
5345	*	0039	A
5345	*	0042	A
5345	*	0045	A
5345	*	0048	A
5345	*	0051	A
5345	*	0054	A



Rubber Thickness 4.7 mm


Tappeti modulari / Modular belts / Mattenketten

**556 Series**

# 556

Pitch 25,4 mm

H= 12,7 mm

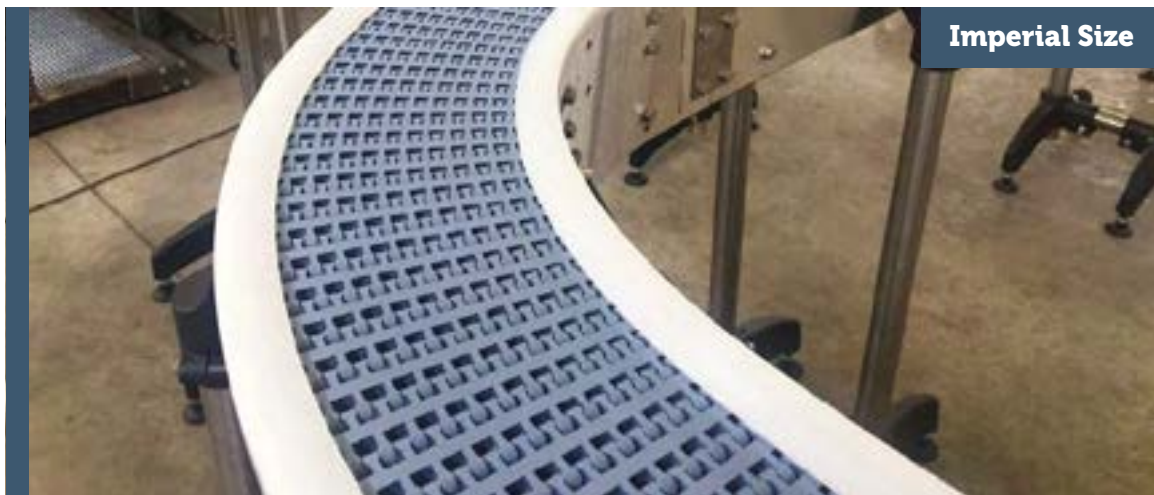

556 FT  
556 GT

**Movex<sup>®</sup>**

## 556 FT


Tappeto Modulare Curvilineo Serie 556, H=12,7 M=3"

Side Flex Modular Belt Series 556, H=12,7 M=3" / Kurvengängige Mattenkette Serie 556, H=12,7 M=3"

CODE STRUCTURE GUIDE			
(Example)			
5431	01	0006	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**25.4mm**  
PITCH

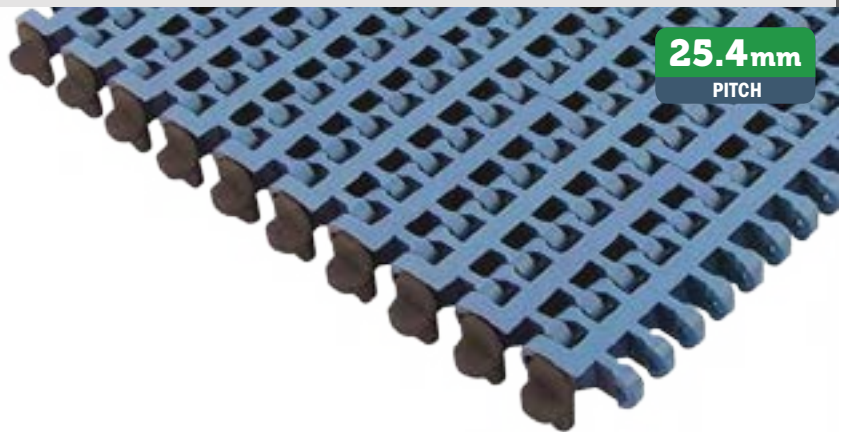

### \*Material

#### LFA - Code 01

Low friction Acetal

**Max w. load:**  
Straight: 30000 N/m  
Curve: 2000 N  
**Weight:** 7,5 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white

#### LFB - Code 23

Low friction Acetal


**Max w. load:**  
Straight: 30000 N/m  
Curve: 2000 N  
**Weight:** 7,5 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white

#### PPB - Code 24

Polypropylene

**Max w. load:**  
Straight: 19500 N/m  
Curve: 1300 N  
**Weight:** 5,8 kg/m<sup>2</sup>  
**Temp. range dry:** 4+65 °C  
**Temp. range wet:** 4+65 °C  
**Pin material:** PP blu

**THE BEST CHOICE FOR  
FOOD CONTACT APPLICATION**

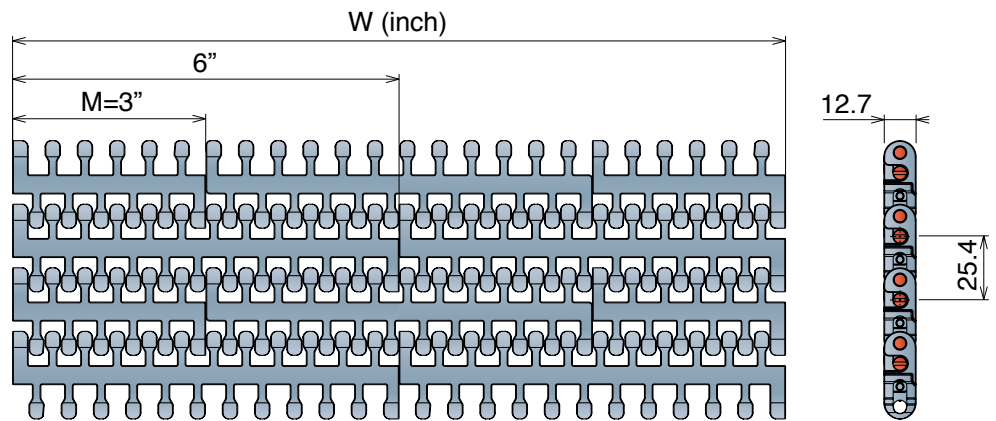

STANDARD



TAB



TAB/POSITIONER



Series	Material	Width	Version	min radius
5431	*	0009	A	435
5431	*	0012	A	580
5431	*	0015	A	725
5431	*	0018	A	890
5431	*	0021	A	1040
5431	*	0024	A	1250

Series	Material	Width	Version	min radius
5431	*	0009	B	435
5431	*	0012	B	580
5431	*	0015	B	725
5431	*	0018	B	890
5431	*	0021	B	1040
5431	*	0024	B	1250

Series	Material	Width	Version	min radius
5431	*	0009	C	435
5431	*	0012	C	580
5431	*	0015	C	725
5431	*	0018	C	890
5431	*	0021	C	1040
5431	*	0024	C	1250

ONE TRACK BELT				
Series	Material	Width	Version	min radius
5431	*	0003	A	145
5431	*	0006	A	290

ONE TRACK BELT				
Series	Material	Width	Version	min radius
5431	*	0003	B	145
5431	*	0006	B	290

ONE TRACK BELT				
Series	Material	Width	Version	min radius
5431	*	0003	C	145
5431	*	0006	C	290

# 556 GT

Tappeto Modulare Curvilineo Serie 556 GT, H=12,7 M=3"

Side Flex Modular Belt Series 556 GT, H=12,7 M=3" / Kurvengängige Mattenkette Serie 556 GT, H=12,7 M=3"


### CODE STRUCTURE GUIDE

(Example)

<b>5433</b>	<b>01</b>	<b>0018</b>	<b>B-S</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 25 mm

**25.4mm**  
PITCH

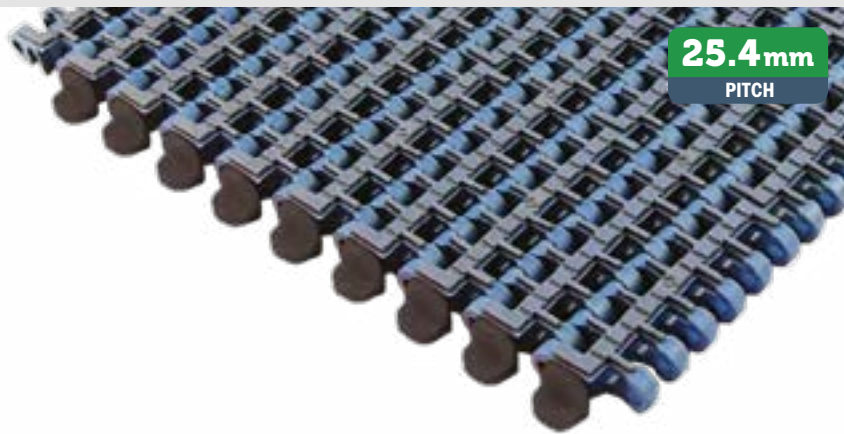

Imperial Size



pg. 280



pg. 516->524



pg. 494

### \*Material

### LFA - Code 01

Low friction Acetal

#### Max w. load:

Straight: 30000 N/m

Curve: 2000 N

Weight: 7,7 kg/m<sup>2</sup>

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

Hardness of

Grip top Rubber: 50 ShA

### LFB - Code 23

Low friction Acetal

#### Max w. load:

Straight: 30000 N/m

Curve: 2000 N

Weight: 7,7 kg/m<sup>2</sup>

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

Hardness of

Grip top Rubber: 50 ShA

### PPB - Code 24

Polypropylene

Standard rubber: 50 ShA

Code: -S

#### Max w. load:

Straight: 19500 N/m

Curve: 1300 N

Weight: 5,8 kg/m<sup>2</sup>

Temp. range dry: 4+65 °C


Temp. range wet: 4+65 °C

Pin material: PP blu

Hardness of

Grip top Rubber: 50 ShA

**THE BEST CHOICE FOR  
FOOD CONTACT APPLICATION**

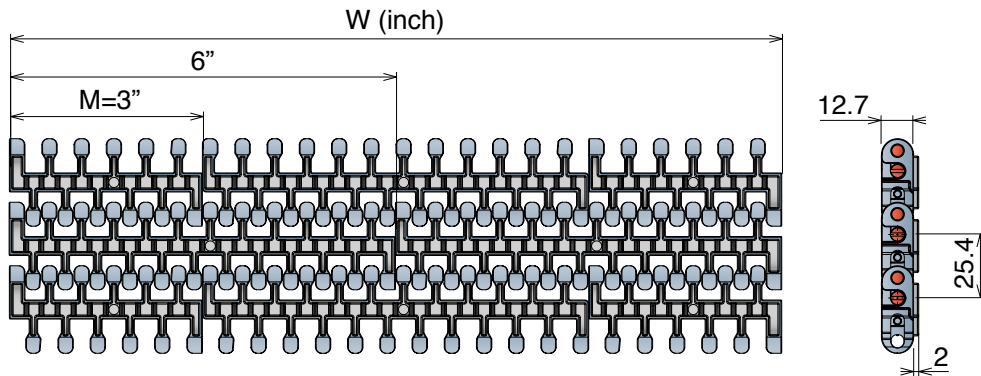

### STANDARD




Series	Material	Width	Version	min radius
5433	*	0009	A	435
5433	*	0012	A	580
5433	*	0015	A	725
5433	*	0018	A	890
5433	*	0021	A	1040
5433	*	0024	A	1250

### ONE TRACK BELT

Series	Material	Width	Version	min radius
5433	*	0003	A	145
5433	*	0006	A	290

### TAB



Series	Material	Width	Version	min radius
5433	*	0009	B	435
5433	*	0012	B	580
5433	*	0015	B	725
5433	*	0018	B	890
5433	*	0021	B	1040
5433	*	0024	B	1250

### ONE TRACK BELT

Series	Material	Width	Version	min radius
5433	*	0003	B	145
5433	*	0006	B	290

### TAB/POSITIONER



Series	Material	Width	Version	min radius
5433	*	0009	C	435
5433	*	0012	C	580
5433	*	0015	C	725
5433	*	0018	C	890
5433	*	0021	C	1040
5433	*	0024	C	1250

### ONE TRACK BELT

Series	Material	Width	Version	min radius
5433	*	0003	C	145
5433	*	0006	C	290



# 600 Series

# 600

Pitch 31,75 mm  
H= 12,7 mm



Metric Size

**Movex**<sup>®</sup>

**600 Standard**

**600 Heavy duty**

**600 Heavy duty  
with Bearings**

**600 Small radius**

**600 Heavy duty/Small radius**

**600 Heavy duty/Small radius  
with Bearings**

**600 with pusher**

**1047 Heavy duty guide**

## 600 Standard

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85

Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85




### CODE STRUCTURE GUIDE

(Example)

5421	01	0595	A
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**31.75mm**  
PITCH

		
pg. 283	pg. 516->524	pg. 495



Metric Size

**Improved Design and Performance**

\*Material

### LFA - Code 01

Low friction Acetal


**Max w. load:**  
Straight 30000 N/m  
Curve 2500 N  
**Weight:** 7,7 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white

### LFB - Code 23

Low friction Acetal

**Max w. load:**  
Straight 30000 N/m  
Curve 2500 N  
**Weight:** 7,7 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white


**Internal Min Radius**  
**2 times the width**

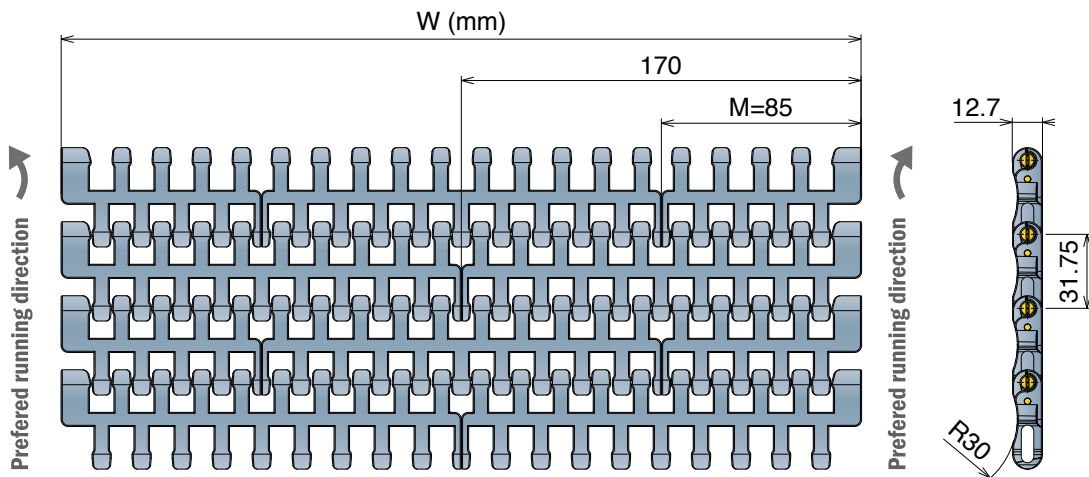


#### STANDARD




#### TAB



#### REVERSE TAB



#### TAB REVERSE TAB



Series	Material	Width	Version	min radius
5421	*	0255	A	510
5421	*	0340	A	680
5421	*	0425	A	850
5421	*	0510	A	1020
5421	*	0595	A	1190
5421	*	0680	A	1360
5421	*	0765	A	1530
5421	*	0850	A	1700

Series	Material	Width	Version	min radius
5421	*	0255	B	510
5421	*	0340	B	680
5421	*	0425	B	850
5421	*	0510	B	1020
5421	*	0595	B	1190
5421	*	0680	B	1360
5421	*	0765	B	1530
5421	*	0850	B	1700

Series	Material	Width	Version	min radius
5421	*	0255	C	510
5421	*	0340	C	680
5421	*	0425	C	850
5421	*	0510	C	1020
5421	*	0595	C	1190
5421	*	0680	C	1360
5421	*	0765	C	1530
5421	*	0850	C	1700

Series	Material	Width	Version	min radius
5421	*	0255	D	510
5421	*	0340	D	680
5421	*	0425	D	850
5421	*	0510	D	1020
5421	*	0595	D	1190
5421	*	0680	D	1360
5421	*	0765	D	1530
5421	*	0850	D	1700

Tappeti modulari / Modular belts / Mattenketten

# 600 Heavy duty

Tappeti modulari / Modular belts / Mattenketten


Metric Size

## 600 Heavy duty Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85 Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

Backflex radius min.: 25 mm

CODE STRUCTURE GUIDE			
(Example)			
5422	01	0340	E
Series	*Material	Width	Version

**31.75 mm**  
PITCH



pg. 283

pg. 516->524

pg. 496-497

**Improved Design and Performance**



\*Material

### LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m

Curve 3500 N

Weight: 8,3 kg/m<sup>2</sup>

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

### LFB - Code 23

Low friction Acetal

Max w. load:

Straight 30000 N/m

Curve 3500 N


Weight: 8,3 kg/m<sup>2</sup>

Temp. range dry: -40+80 °C


Temp. range wet: -40+65 °C

Pin material: PBT white

**Internal Min Radius  
2 times the width**

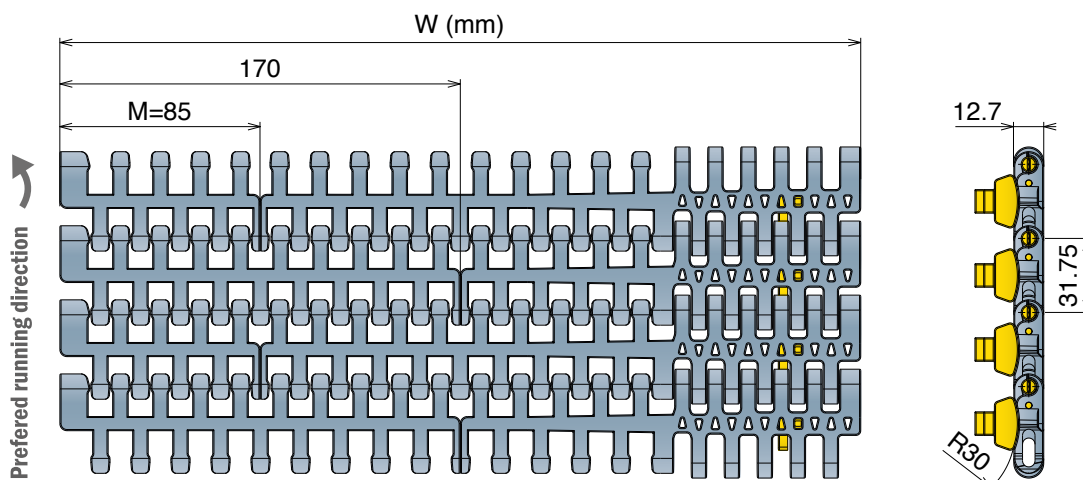

### STANDARD



Series	Material	Width	Version	min radius
5422	*	0340	E	680
5422	*	0425	E	850
5422	*	0510	E	1020
5422	*	0595	E	1190
5422	*	0680	E	1360
5422	*	0765	E	1530
5422	*	0850	E	1700

### TAB DKM Material



# 600 Heavy duty with Bearings

Tappeti modulari / Modular belts / Mattenketten

## 600 Heavy duty with Bearings

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85  
Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

### CODE STRUCTURE GUIDE


(Example)

5422	01	0340	F
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**31.75 mm**  
PITCH

Metric Size

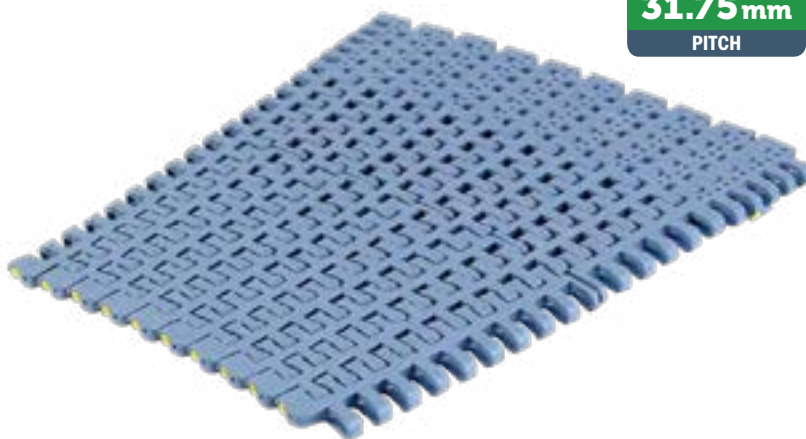

**Improved Design and Performance**

**Internal Min Radius  
2 times the width**

\*Material

### LFA - Code 01


Low friction Acetal

**Max w. load:**  
Straight 30000 N/m  
Curve 3500 N  
**Weight:** 9,0 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white


### LFB - Code 23

Low friction Acetal

**Max w. load:**  
Straight 30000 N/m  
Curve 3500 N  
**Weight:** 9,0 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white

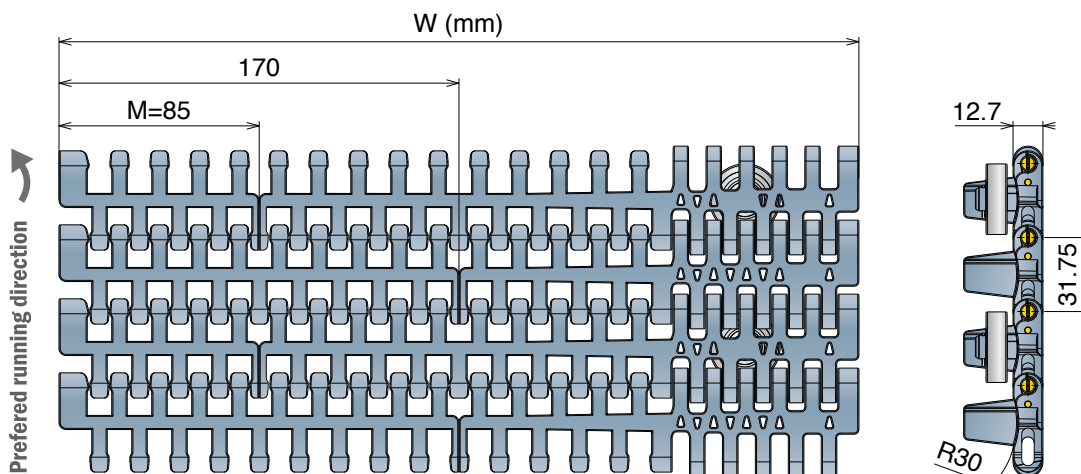

### STANDARD



Series	Material	Width	Version	min radius
5422	*	0340	F	680
5422	*	0425	F	850
5422	*	0510	F	1020
5422	*	0595	F	1190
5422	*	0680	F	1360
5422	*	0765	F	1530
5422	*	0850	F	1700

### Bearing Zoom



Tappeti modulari / Modular belts / Mattenketten

# 600 Small radius

Tappeti modulari / Modular belts / Mattenketten

Metric Size

## 600 Small radius

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85  
Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85


### CODE STRUCTURE GUIDE

(Example)

5423	01	0340	A
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**31.75 mm**  
PITCH



pg. 283-284

pg. 516->524

pg. 500-501

**Improved Design and Performance**



\*Material

### LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m  
Curve 2500 N

Weight: 7,0 kg/m<sup>2</sup>

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

### LFB - Code 23

Low friction Acetal

Max w. load:


Straight 30000 N/m  
Curve 2500 N

Weight: 7,0 kg/m<sup>2</sup>

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C


Pin material: PBT white

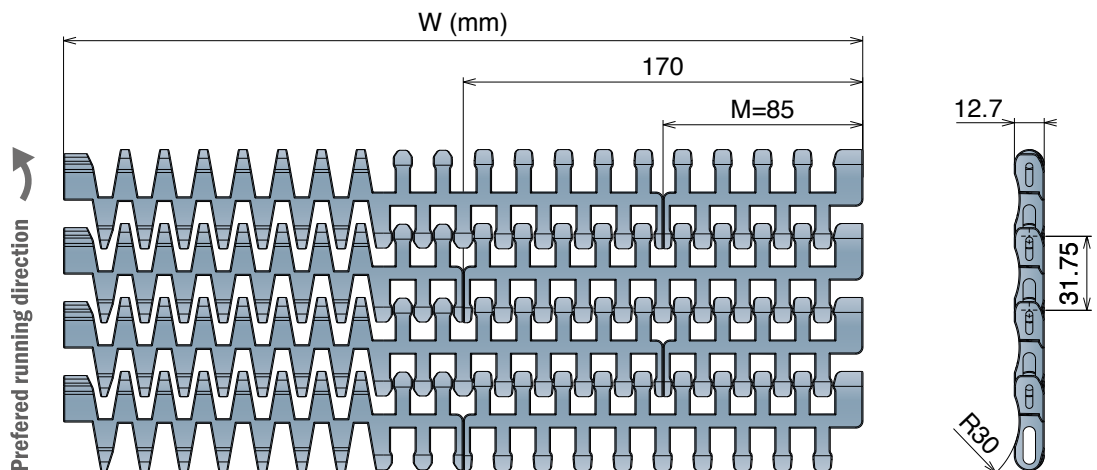


### STANDARD




### TAB



### REVERSE TAB



### TAB REVERSE TAB



Series	Material	Width	Version	min radius
5423	*	0340	A	400
5423	*	0425	A	500
5423	*	0510	A	600
5423	*	0595	A	720
5423	*	0680	A	880
5423	*	0765	A	1040
5423	*	0850	A	1200
Series	Material	Width	Version	min radius
5423	*	0340	B	400
5423	*	0425	B	500
5423	*	0510	B	600
5423	*	0595	B	720
5423	*	0680	B	880
5423	*	0765	B	1040
5423	*	0850	B	1200
Series	Material	Width	Version	min radius
5423	*	0340	C	400
5423	*	0425	C	500
5423	*	0510	C	600
5423	*	0595	C	720
5423	*	0680	C	880
5423	*	0765	C	1040
5423	*	0850	C	1200
Series	Material	Width	Version	min radius
5423	*	0340	D	400
5423	*	0425	D	500
5423	*	0510	D	600
5423	*	0595	D	720
5423	*	0680	D	880
5423	*	0765	D	1040
5423	*	0850	D	1200

Tappeti modulari / Modular belts / Mattenketten

# 600 Heavy duty/Small radius

Tappeti modulari / Modular belts / Mattenketten

## 600 Heavy duty/Small radius

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=170  
Side Flex Modular Belt Series 600, H=12,7 M=170 / Kurvengängige Mattenkette Serie 600, H=12,7 M=170


### CODE STRUCTURE GUIDE

(Example)

<b>5424</b>	<b>01</b>	<b>0425</b>	<b>E</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 25 mm

**31.75 mm**  
PITCH



**Improved Design and Performance**



Metric Size

### \*Material

#### LFA - Code 01


Low friction Acetal

**Max w. load:**  
Straight 30000 N/m  
Curve 3500 N  
**Weight:** 7,5 kg/m<sup>2</sup>  
**Temp. range dry:** -40÷80 °C  
**Temp. range wet:** -40÷65 °C  
**Pin material:** PBT white


#### LFB - Code 23

Low friction Acetal

**Max w. load:**  
Straight 30000 N/m  
Curve 3500 N  
**Weight:** 7,5 kg/m<sup>2</sup>  
**Temp. range dry:** -40÷80 °C  
**Temp. range wet:** -40÷65 °C  
**Pin material:** PBT white

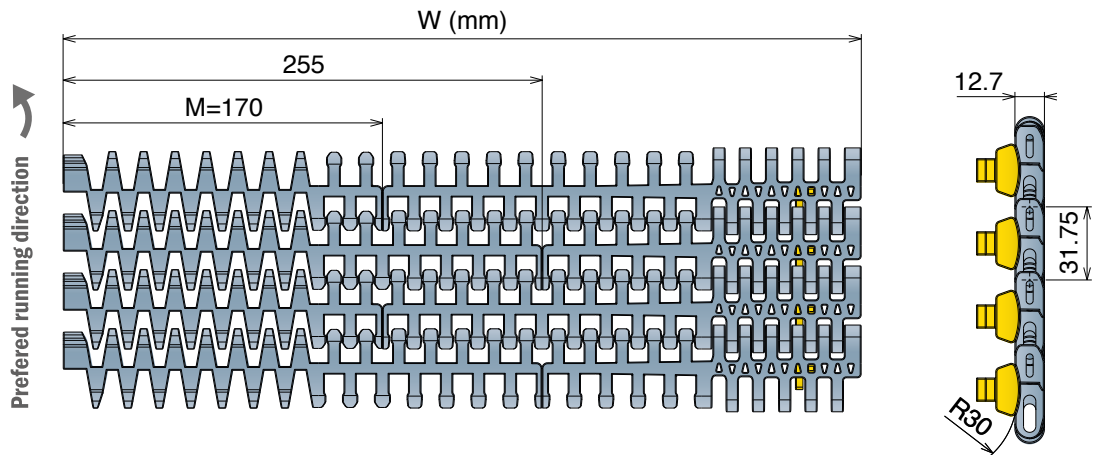

### STANDARD



Series	Material	Width	Version	min radius
5424	*	0425	E	500
5424	*	0510	E	600
5424	*	0595	E	720
5424	*	0680	E	880
5424	*	0765	E	1040
5424	*	0850	E	1200

### TAB DKM Material



# 600 Heavy duty/Small radius with Bearings

Tappeti modulari / Modular belts / Mattenketten

Metric Size

## 600 Heavy duty/Small radius with Bearings

Tappeto Curvilineo Serie 600, H=12,7 M=170  
Side Flex Modular Belt Series 600, H=12,7 M=170 / Kurvengängige Mattenkette Serie 600, H=12,7 M=170


### CODE STRUCTURE GUIDE

(Example)

<b>5424</b>	<b>01</b>	<b>0425</b>	<b>F</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**31.75 mm**  
PITCH



pg. 283-284

pg. 516->524

pg. 504-505



**Improved Design and Performance**

### \*Material

#### LFA - Code 01

Low friction Acetal

#### Max w. load:

Straight 30000 N/m  
Curve 3500 N

Weight: 8,5 kg/m<sup>2</sup>

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

#### LFB - Code 23

Low friction Acetal

#### Max w. load:


Straight 30000 N/m  
Curve 3500 N

Weight: 8,5 kg/m<sup>2</sup>


Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

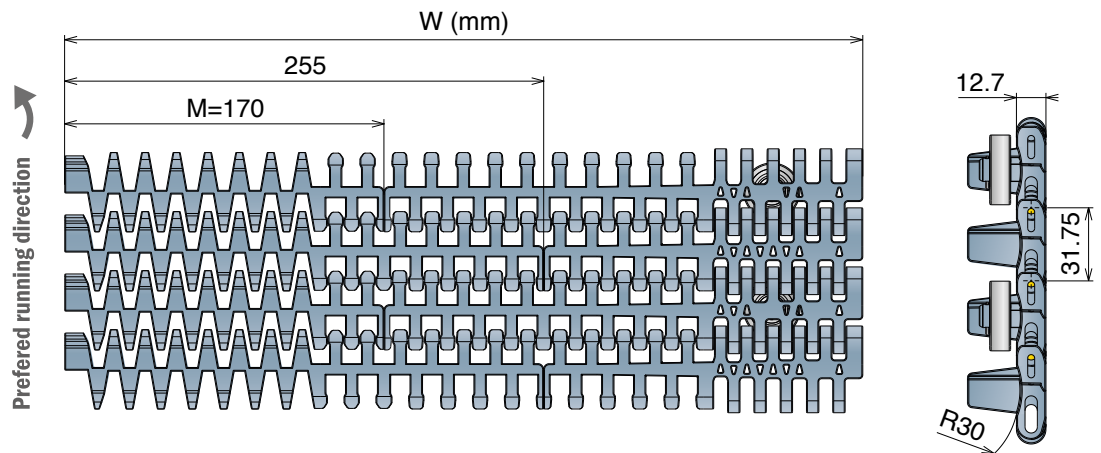

### STANDARD



Series	Material	Width	Version	min radius
5424	*	0425	F	500
5424	*	0510	F	600
5424	*	0595	F	720
5424	*	0680	F	880
5424	*	0765	F	1040
5424	*	0850	F	1200

### Bearing Zoom




# 600 with pusher - 1047 Heavy duty guide

Tappeti modulari / Modular belts / Mattenketten

## 600 with pusher

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85  
Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85


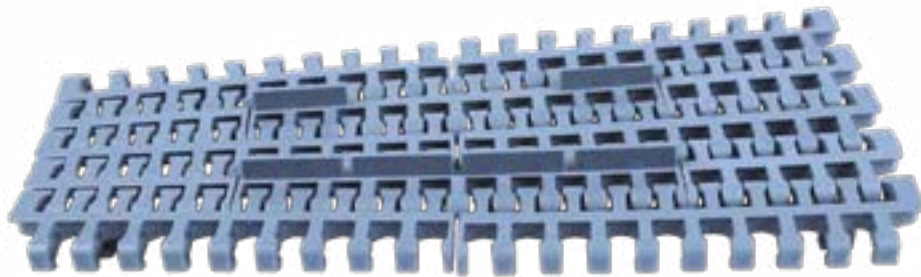


**31.75 mm**  
PITCH

  
pg. 283

  
pg. 516->524

Metric Size


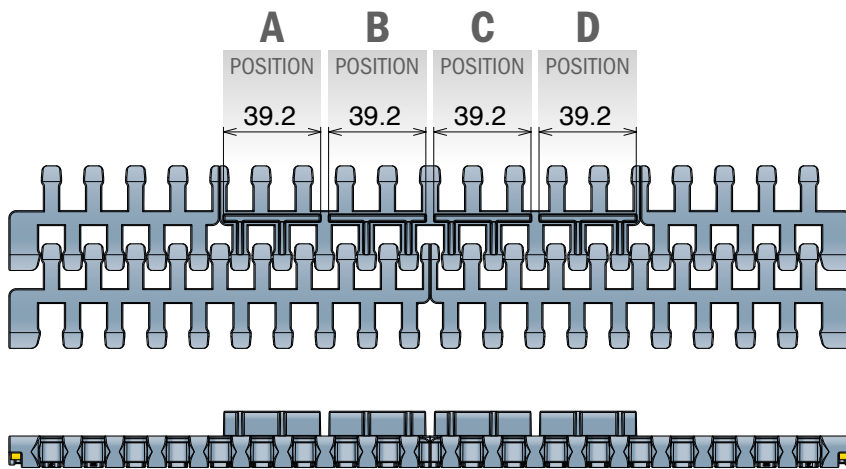


The pusher is applicable only for the center module, and there are available up to a maximum of 4 positions (A-B-C-D) or with different types of combinations (example A-B-D / A-C / B-C-D).

**Consult our engineering department for details.**

## 1047

Guida tappeto  
Belt side guide / Seitenführung für Mattenkette

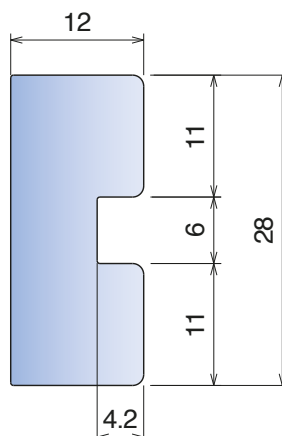

Part	Article-Nr.	Material	Width
1047	104700BC	BluLub	3 m

 **Material:** Polyethylene UHMW-PE with molecular density 9,200,000 g/mo.

**BluLub**, new material with reduced coefficient of friction and higher wear resistance. BluLub complies with the code of Federal Regulations of FDA.  
Linear expansion coefficient:  $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$  ( $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$ )  
Operating temperature: -40 to 176°F (-40 to +80°C)

Tappeti modulari / Modular belts / Mattenketten



# 500

Pitch 50,8 mm  
H= 24 mm



Imperial Size

500 RR  
389 *Combs*

## 500 RR

Tappeto Modulare 500 RR  
Raised Rib Belt Series 500 RR / Modulare Mattenkette 500 RR

### CODE STRUCTURE GUIDE

(Example)

**1348**    **11**    **0090**

**Series**    **\*Material**    **Width**



pg. 286



pg. 516->524



pg. 484



**50.8mm**  
PITCH

Imperial Size



### \*Material

**PP - Code 02**  
Polypropylene

**PPX - Code 11**  
Polypropylene

**Max w. load:** 30000 N/m    **Max w. load:** 30000 N/m  
**Weight:** 10,65 kg/m<sup>2</sup>    **Weight:** 10,65 kg/m<sup>2</sup>  
**Temp. range:** 4÷104 °C    **Temp. range:** 4÷104 °C

**Pin material:** PP grey    **Pin material:** PP grey

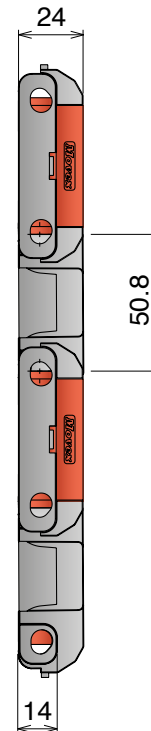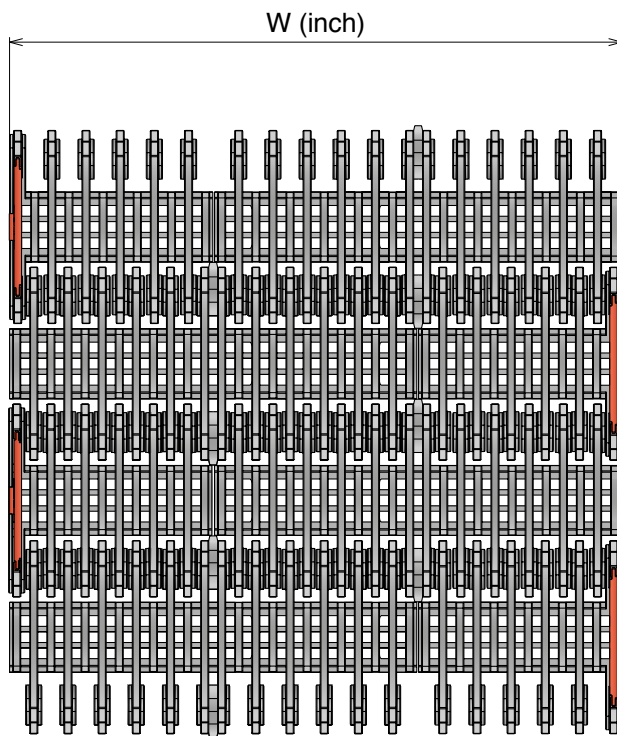


Series	Material	Width	Series	Material	Width
1348	*	0060	1348	*	0093
1348	*	0063	1348	*	0096
1348	*	0066	1348	*	0099
1348	*	0069	1348	*	0102
1348	*	0072	1348	*	0105
1348	*	0075	1348	*	0108
1348	*	0078	1348	*	0111
1348	*	0081	1348	*	0114
1348	*	0084	1348	*	0117
1348	*	0087	1348	*	0120
1348	*	0090			

## 389

Pettine  
Combs / Fingerplatte

### Screw info




**X 2 Included**




### Type A

Part	Article-Nr.
389	38901

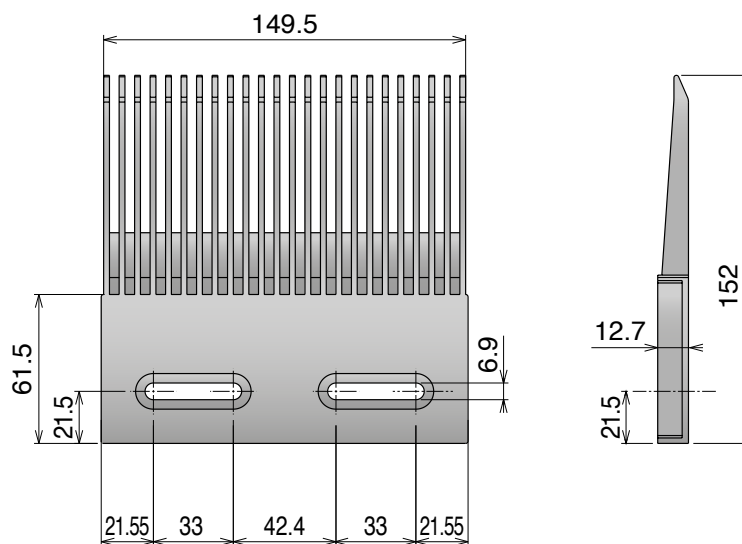

### Type B

Part	Article-Nr.
389	38902

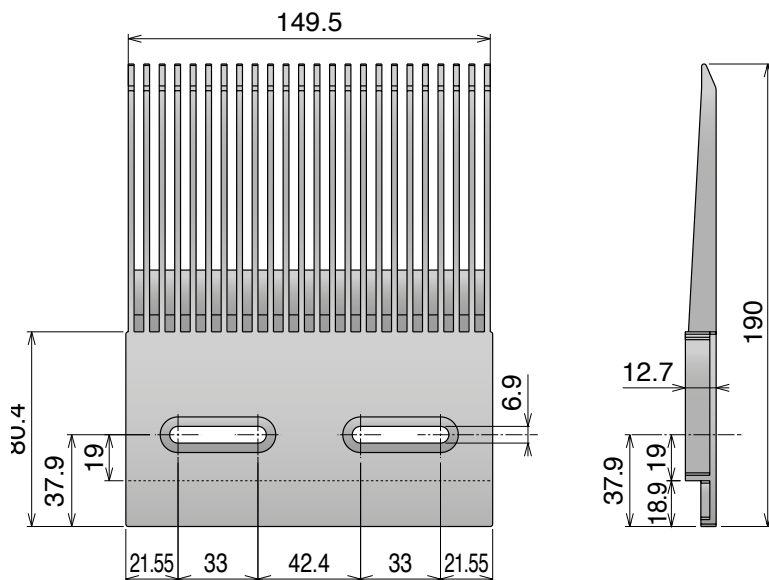

# ZERO<sup>520</sup> CONTACT

H= 10,1 mm

Imperial Size

**ZERO CONTACT**  
**ZERO CONTACT PRO**  
**ZERO CONTACT CURVE**

**Movex<sup>®</sup>**

**ZERO CONTACT**

## ZERO CONTACT

Tappeto Modulare Curvilineo Zero Contact™, H=10,1 M=200

Side Flex Modular Belt Zero Contact™, H=10,1 M=200 / Kurvengängige Mattenkette Zero Contact™, H=10,1 M=200

Delivery: **Easy** Standard



pg. 285



pg. 516->524



pg. 507

\*Material


**LFA**

Low friction Acetal

**Max w. load:** 13500 N/m  
**Weight:** 9,25 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin:** PBT white



**Max belt speed:** 70 m/min on middle radius  
**Row to row angle:** 1.33° | **Pin:** D4,7 mm, PBT White  
**Color of the modules:** Pigeon Blue | **Open Area:** 0%

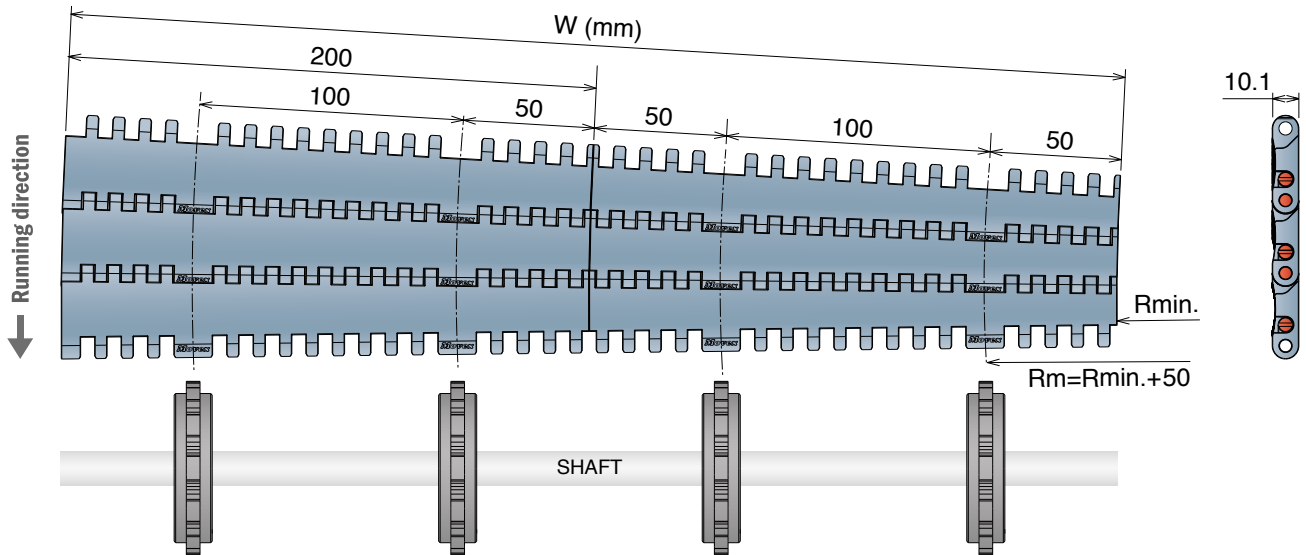

### Side Flex Modular Belt Zero Contact™ 90° | Length of the belt 150 Modules

Part	Belt Width (mm)	Rmin. 600	Rmin. 800	Rmin. 1000	Rmin. 1200	Rmin. 1400	Rmin. 1600	Rmin. 1800	Rmin. 2000
545	200	5451010201A	5451010202A	5451010203A	5451010204A	5451010205A	5451010206A	5451010207A	5451010208A
545	400	5451010401A	5451010402A	5451010403A	5451010404A	5451010405A	5451010406A	5451010407A	-
545	600	5451010601A	5451010602A	5451010603A	5451010604A	5451010605A	5451010606A	-	-
545	800	5451010801A	5451010802A	5451010803A	5451010804A	5451010805A	-	-	-
545	1000	5451011001A	5451011002A	5451011003A	5451011004A	-	-	-	-
545	1200	5451011201A	5451011202A	5451011203A	-	-	-	-	-
545	1400	5451011401A	5451011402A	-	-	-	-	-	-
545	1600	5451011601A	-	-	-	-	-	-	-

### Side Flex Modular Belt Zero Contact™ 180° | Length of the belt 285 Modules

Part	Belt Width (mm)	Rmin. 600	Rmin. 800	Rmin. 1000	Rmin. 1200	Rmin. 1400	Rmin. 1600	Rmin. 1800	Rmin. 2000
545	200	5452010201A	5452010202A	5452010203A	5452010204A	5452010205A	5452010206A	5452010207A	5452010208A
545	400	5452010401A	5452010402A	5452010403A	5452010404A	5452010405A	5452010406A	5452010407A	-
545	600	5452010601A	5452010602A	5452010603A	5452010604A	5452010605A	5452010606A	-	-
545	800	5452010801A	5452010802A	5452010803A	5452010804A	5452010805A	-	-	-
545	1000	5452011001A	5452011002A	5452011003A	5452011004A	-	-	-	-
545	1200	5452011201A	5452011202A	5452011203A	-	-	-	-	-
545	1400	5452011401A	5452011402A	-	-	-	-	-	-
545	1600	5452011601A	-	-	-	-	-	-	-

## ZERO CONTACT PRO

Tappeto Modulare Curvilineo Zero Contact PRO, H=9

Side Flex Modular Belt Zero Contact PRO, H=9 / Kurvengängige Mattenkette Zero Contact PRO, H=9



pg. 285




pg. 516-&gt;524



pg. 508-&gt;514



Metric Size



Based on our Zero Contact belt, **Movex®** decided to introduce **Zero Contact PRO**, a reinforced version designed specifically for heavy applications.

This innovative design is especially recommended for high speed, heavy loads and transportation of abrasive substances, like sand, salt, sugar, and many other applications.

The stainless steel pins guarantee a higher working load, and due to the new pin retention with grub screw, this permits a strong assembling of the belt.

The robust structure of **Zero Contact PRO** can be summarized in minimal maintenance, long life expectation and high reliability.

**Zero Contact PRO** is a surprisingly versatile belt, allowing a wider range of available widths and radii. We also have the possibility to integrate bearings for extreme environments and higher PV limits. It creates the opportunity to develop a two track conveyor for ultimate loading, and can also support the traceability of products.




Wide range available

Ideal for Heavy application

High wear resistance

NO Lubrification


High chemical resistance

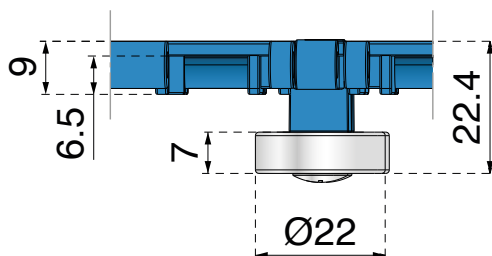

Bearing

Support for Bearing

Bolt

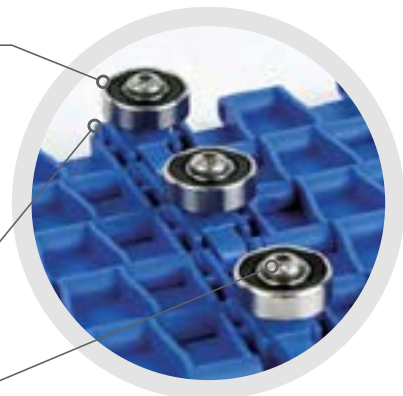

## Technical specification

**Material of the modules:** PA glass fibre reinforced

**Color of the modules:** Dark Pigeon Blue

**Pin:** D4 mm, material 1.4301

**Pin lock:** Stainless steel grub screw


**Temperature range:** -30°C to 100°C

**Max belt speed:** 70 m/min on middle radius

**Max working load:** 19000 N/m belt width

**Bearing:** S608RS

## Order code for 90°

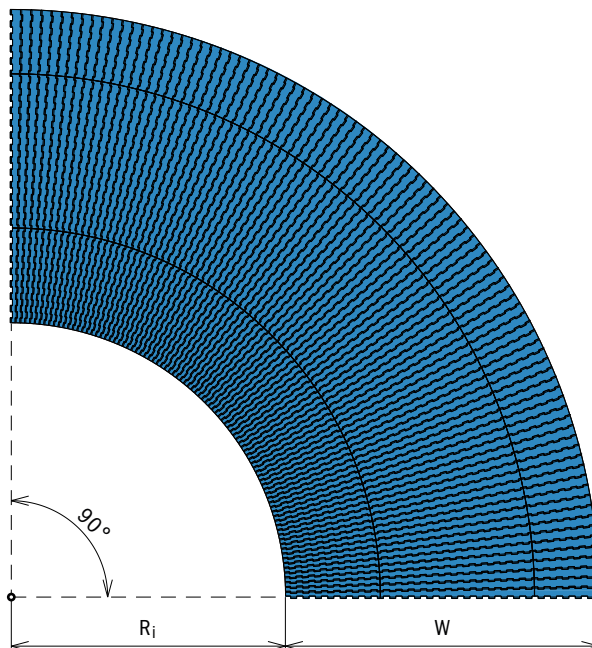

### Side Flex Modular Belt Zero Contact PRO™ 90° | Without bearings

Order code	Radius	Belt Width
5461280439A-M	586	439
5461280524A-M	586	524
5461280864A-M	586	864
5461281034A-M	586	1034
5462280269A-M	756	269
5462280439A-M	756	439
5462280524A-M	756	524
5462280864A-M	756	864

Order code	Radius	Belt Width
5462281034A-M	756	1034
5463280269A-M	1011	269
5463280439A-M	1011	439
5463280524A-M	1011	524
5463280864A-M	1011	864
5463281034A-M	1011	1034
5465280249A-M	1031	249
5464280419A-M	1031	419

Order code	Radius	Belt Width
5464280504A-M	1116	504
5465280419A-M	1201	419
5466280249A-M	1286	249
5465280504A-M	1286	504
5466280419A-M	1456	419
5466280504A-M	1541	504

### Side Flex Modular Belt Zero Contact PRO™ 90° | With bearings

Order code	Radius	Belt Width
5462280249A-M	1031	249
5461280419A-M	1031	419
5461280504A-M	1116	504
5462280419A-M	1201	419

Order code	Radius	Belt Width
5463280249A-M	1286	249
5462280504A-M	1286	504
5463280419A-M	1456	419
5463280504A-M	1541	504




### Side Flex Modular Belt Zero Contact PRO™ 90° | Two track combinations

Track 1 - Order code	Radius	Belt Width		Track 2 - Order code	Radius	Belt Width	Total width
5462280269A-M	756	269	+	5465280249A-M	1031	249	524
5463280269A-M	1011	269	+	5466280249A-M	1286	249	524
5461280439A-M	586	439	+	5464280419A-M	1031	419	864
5462280439A-M	756	439	+	5465280419A-M	1201	419	864
5463280439A-M	1011	439	+	5466280419A-M	1456	419	864
5461280524A-M	586	524	+	5464280504A-M	1116	504	1034
5462280524A-M	756	524	+	5465280504A-M	1286	504	1034
5463280524A-M	1011	524	+	5466280504A-M	1541	504	1034

The gap between the belts is 6 mm.

## Order code for 180°

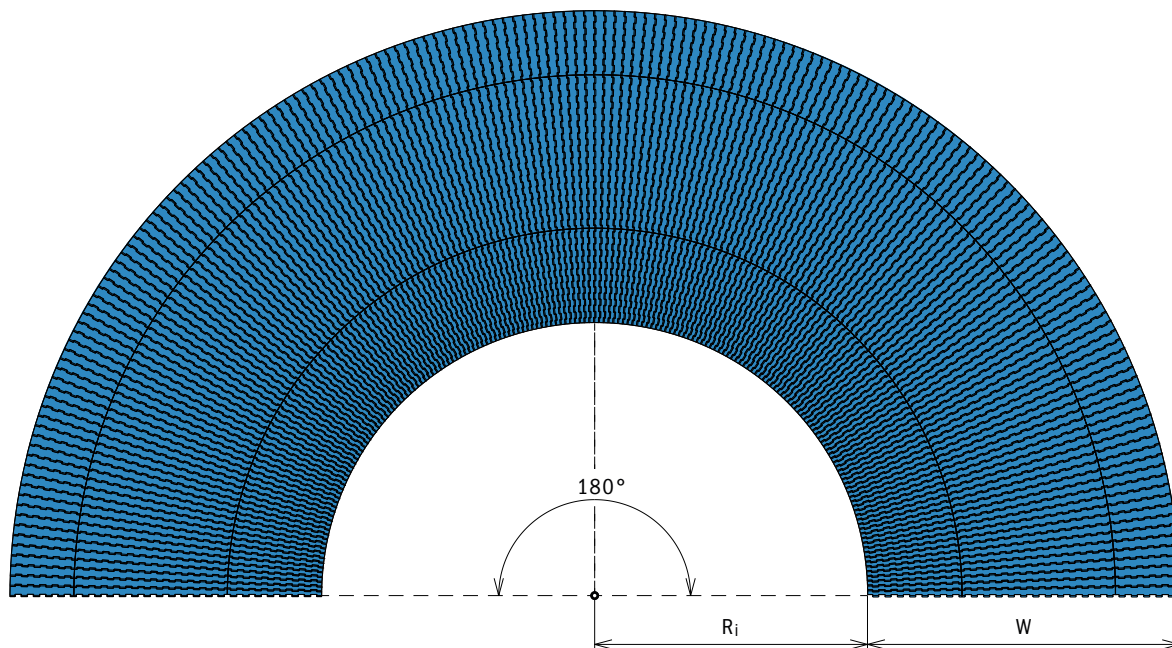

### Side Flex Modular Belt Zero Contact PRO™ 180° | Without bearings

Order code	Radius	Belt Width
5461280439B-M	586	439
5461280524B-M	586	524
5461280864B-M	586	864
5461281034B-M	586	1034
5462280269B-M	756	269
5462280439B-M	756	439
5462280524B-M	756	524
5462280864B-M	756	864

Order code	Radius	Belt Width
5462281034B-M	756	1034
5463280269B-M	1011	269
5463280439B-M	1011	439
5463280524B-M	1011	524
5463280864B-M	1011	864
5463281034B-M	1011	1034
5465280249B-M	1031	249
5464280419B-M	1031	419

Order code	Radius	Belt Width
5464280504B-M	1116	504
5465280419B-M	1201	419
5466280249B-M	1286	249
5465280504B-M	1286	504
5466280419B-M	1456	419
5466280504B-M	1541	504

### Side Flex Modular Belt Zero Contact PRO™ 180° | With bearings

Order code	Radius	Belt Width
5462280249B-M	1031	249
5461280419B-M	1031	419
5461280504B-M	1116	504
5462280419B-M	1201	419

Order code	Radius	Belt Width
5463280249B-M	1286	249
5462280504B-M	1286	504
5463280419B-M	1456	419
5463280504B-M	1541	504



### Side Flex Modular Belt Zero Contact PRO™ 180° | Two track combinations

Track 1 - Order code	Radius	Belt Width		Track 2 - Order code	Radius	Belt Width	Total width
5462280269B-M	756	269	+	5465280249B-M	1031	249	524
5463280269B-M	1011	269	+	5466280249B-M	1286	249	524
5461280439B-M	586	439	+	5464280419B-M	1031	419	864
5462280439B-M	756	439	+	5465280419B-M	1201	419	864
5463280439B-M	1011	439	+	5466280419B-M	1456	419	864
5461280524B-M	586	524	+	5464280504B-M	1116	504	1034
5462280524B-M	756	524	+	5465280504B-M	1286	504	1034
5463280524B-M	1011	524	+	5466280504B-M	1541	504	1034

The gap between the belts is 6 mm.



# ZER<sup>520</sup>CONTACT

C U R V E

CURVE CONVEYOR  
WITH PLASTIC BELT

The new **Zero Contact™ Curve** is available in different widths with a closed-top surface capable of handling a variety of package sizes, types and configurations including delicate products and applications exiting a shrink wrapper. It's the ideal solution for transporting Bags, Bundles, Containers, Cartons and Wrapped items

If you have questions about a specific application, don't hesitate to contact our engineering department.



### Design

Improved construction and straight section eliminated before and after curve.

### Safety

Closed-Top design and Improved safety.

### Product care

Improved product handling, holding original orientation.

### Easy implementation

Easy implementation in existing layouts respectively easy replacement of existing conveyor.

### Space

Less floorspace required.

### Money saving

With reduced maintenance cost.

## Technical specification

<b>Available belt width:</b>	200 mm to 1600 mm (increments of 200 mm)
<b>Available curve angle:</b>	90° and 180° (Different angle on request)
<b>Max belt speed:</b>	70 m/min.
<b>Weight:</b>	9,25 Kg/m <sup>2</sup>
<b>Max working load:</b>	2700 N per 200 mm of belt width
<b>Min. inner radius:</b>	600 mm to 2000 mm (increments of 200 mm)
<b>Gearmotor:</b>	SEW (Different options on request)

<b>Belt material:</b>	Acetal (POM) - RAL 5014
<b>Pins material:</b>	PBT White
<b>Frame material:</b>	Stainless steel - AISI 304 or "Painted" available on request
<b>Drive method:</b>	Solid sprockets PA6 machined
<b>Temperature range:</b>	Dry: -40÷80°C - Wet: -40÷65°C


All pictures shown are for illustration purpose only. Actual product may vary due to product enhancement.

# CURVES RANGE


Angle 90°

Length of the belt: 150 Modules

Left Version **CS**



**CD** Right Version



Metric Size

Width (mm)	Version	Rmin. 600	Rmin. 800	Rmin. 1000	Rmin. 1200	Rmin. 1400	Rmin. 1600	Rmin. 1800	Rmin. 2000
200	RIGHT	W02R06G090-CD	W02R08G090-CD	W02R10G090-CD	W02R12G090-CD	W02R14G090-CD	W02R16G090-CD	W02R18G090-CD	W02R20G090-CD
	LEFT	W02R06G090-CS	W02R08G090-CS	W02R10G090-CS	W02R12G090-CS	W02R14G090-CS	W02R16G090-CS	W02R18G090-CS	W02R20G090-CS
400	RIGHT	W04R06G090-CD	W04R08G090-CD	W04R10G090-CD	W04R12G090-CD	W04R14G090-CD	W04R16G090-CD	W04R18G090-CD	-
	LEFT	W04R06G090-CS	W04R08G090-CS	W04R10G090-CS	W04R12G090-CS	W04R14G090-CS	W04R16G090-CS	W04R18G090-CS	-
600	RIGHT	W06R06G090-CD	W06R08G090-CD	W06R10G090-CD	W06R12G090-CD	W06R14G090-CD	W06R16G090-CD	-	-
	LEFT	W06R06G090-CS	W06R08G090-CS	W06R10G090-CS	W06R12G090-CS	W06R14G090-CS	W06R16G090-CS	-	-
800	RIGHT	W08R06G090-CD	W08R08G090-CD	W08R10G090-CD	W08R12G090-CD	W08R14G090-CD	-	-	-
	LEFT	W08R06G090-CS	W08R08G090-CS	W08R10G090-CS	W08R12G090-CS	W08R14G090-CS	-	-	-
1000	RIGHT	W10R06G090-CD	W10R08G090-CD	W10R10G090-CD	W10R12G090-CD	-	-	-	-
	LEFT	W10R06G090-CS	W10R08G090-CS	W10R10G090-CS	W10R12G090-CS	-	-	-	-
1200	RIGHT	W12R06G090-CD	W12R08G090-CD	W12R10G090-CD	-	-	-	-	-
	LEFT	W12R06G090-CS	W12R08G090-CS	W12R10G090-CS	-	-	-	-	-
1400	RIGHT	W14R06G090-CD	W14R08G090-CD	-	-	-	-	-	-
	LEFT	W14R06G090-CS	W14R08G090-CS	-	-	-	-	-	-
1600	RIGHT	W16R06G090-CD	-	-	-	-	-	-	-
	LEFT	W16R06G090-CS	-	-	-	-	-	-	-


These codes mean complete curve, except floor supports and gearmotor, if you need to include them please contact your sales representative.

# CURVES RANGE


Angle 180°

Length of the belt: 285 Modules

Left Version **CS**

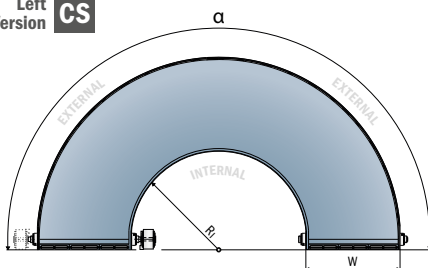

**CD** Right Version

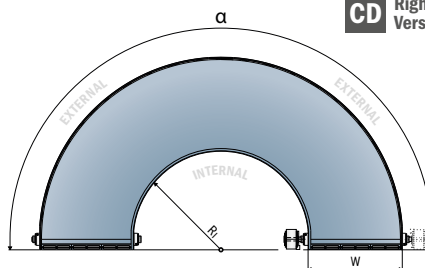

Width (mm)	Version	Rmin. 600	Rmin. 800	Rmin. 1000	Rmin. 1200	Rmin. 1400	Rmin. 1600	Rmin. 1800	Rmin. 2000
200	RIGHT	W02R06G180-CD	W02R08G180-CD	W02R10G180-CD	W02R12G180-CD	W02R14G180-CD	W02R16G180-CD	W02R18G180-CD	W02R20G180-CD
	LEFT	W02R06G180-CS	W02R08G180-CS	W02R10G180-CS	W02R12G180-CS	W02R14G180-CS	W02R16G180-CS	W02R18G180-CS	W02R20G180-CS
400	RIGHT	W04R06G180-CD	W04R08G180-CD	W04R10G180-CD	W04R12G180-CD	W04R14G180-CD	W04R16G180-CD	W04R18G180-CD	-
	LEFT	W04R06G180-CS	W04R08G180-CS	W04R10G180-CS	W04R12G180-CS	W04R14G180-CS	W04R16G180-CS	W04R18G180-CS	-
600	RIGHT	W06R06G180-CD	W06R08G180-CD	W06R10G180-CD	W06R12G180-CD	W06R14G180-CD	W06R16G180-CD	-	-
	LEFT	W06R06G180-CS	W06R08G180-CS	W06R10G180-CS	W06R12G180-CS	W06R14G180-CS	W06R16G180-CS	-	-
800	RIGHT	W08R06G180-CD	W08R08G180-CD	W08R10G180-CD	W08R12G180-CD	W08R14G180-CD	-	-	-
	LEFT	W08R06G180-CS	W08R08G180-CS	W08R10G180-CS	W08R12G180-CS	W08R14G180-CS	-	-	-
1000	RIGHT	W10R06G180-CD	W10R08G180-CD	W10R10G180-CD	W10R12G180-CD	-	-	-	-
	LEFT	W10R06G180-CS	W10R08G180-CS	W10R10G180-CS	W10R12G180-CS	-	-	-	-
1200	RIGHT	W12R06G180-CD	W12R08G180-CD	W12R10G180-CD	-	-	-	-	-
	LEFT	W12R06G180-CS	W12R08G180-CS	W12R10G180-CS	-	-	-	-	-
1400	RIGHT	W14R06G180-CD	W14R08G180-CD	-	-	-	-	-	-
	LEFT	W14R06G180-CS	W14R08G180-CS	-	-	-	-	-	-
1600	RIGHT	W16R06G180-CD	-	-	-	-	-	-	-
	LEFT	W16R06G180-CS	-	-	-	-	-	-	-

These codes mean complete curve, except floor supports and gearmotor, if you need to include them please contact your sales representative.

## Request for quotation

<b>Company</b>		<b>Contact</b>	
<b>Sales contact</b>		<b>Date</b>	

### Technical features Please mark with an X

<b>Conveyor angle</b>	90°				180°			
<b>Curve version</b>	Left				Right			
<b>Inside radius (mm)</b>	600	800	1000	1200	1400	1600	1800	2000
<b>Width (mm)</b>	200	400	600	800	1000	1200	1400	1600
<b>Legs (height*)</b>	Yes				No			
<b>Gearmotor</b>	Yes				No			
<b>Gearmotor side</b>	Internal				External			
<b>Country of destination</b>								
<b>Shaft diameter (mm)</b>								

### Movex Standard

$\alpha =$	
-	
$R_1 =$	
W =	
H* =	
SEW	
-	
-	
$\varnothing 40$ Sprocket	

\* From the top of the belt to the floor.

### Application features Please fill out

<b>Type of product</b>	
<b>Product dimension (mm)</b>	
<b>Weight per linear meter (Kg/m)</b>	
<b>Belt Speed (m/min)</b>	
<b>Number tracks of products</b>	
<b>Belt material</b>	
<b>Type of external profile</b>	
<b>Type of internal side guide</b>	
<b>Top wear strip material (inside)</b>	
<b>Return wear strip material</b>	

### Movex Standard

-
-
-
-
-
LFA
Part. 15300C
Part. 700100G0
UHMW-PE (High density)
Return roller

<b>Price</b>	
--------------	--

Fill out the form and send to your sales contact or to: [info@movexii.com](mailto:info@movexii.com)


For fields not completed the Movex standard specifications apply.

# 260/261 Series

# 260/261

Pitch 25,4 mm

H= 21 mm / 25 mm / 28,7 mm

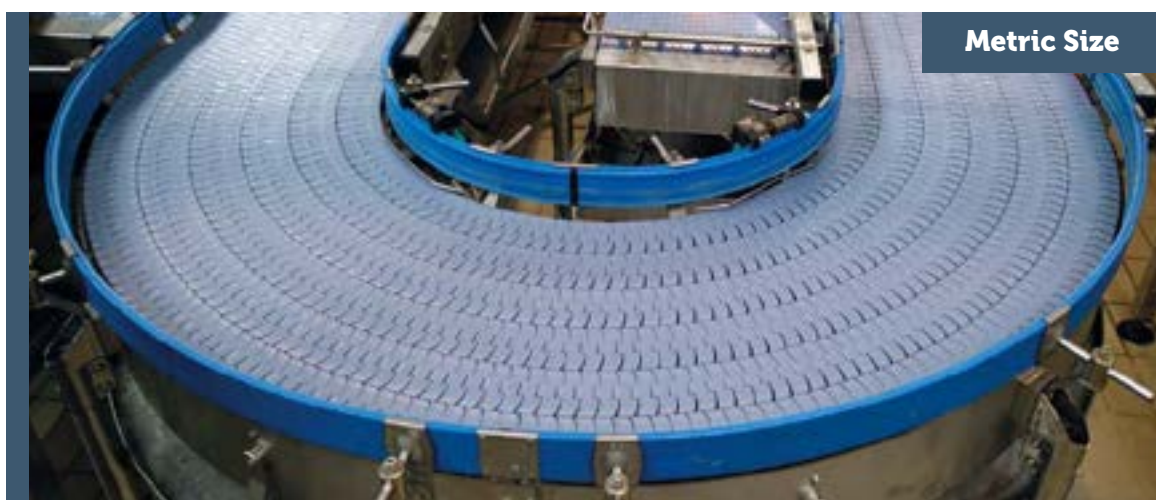

260 M FT  
260 M FG  
260 TAB

261 M FT  
261 TAB

**Movex**<sup>®</sup>

# 260 M FT

Tappeti modulari / Modular belts / Mattenketten

## 260 M FT

Catena curvilinea  
Sideflexing belt/chain / Kurvengängige Mattenkette


**Magnetic System**

Delivery: **Easy** **Standard**

Pins: Ferritic SS


**25.4 mm**  
PITCH

Metric Size

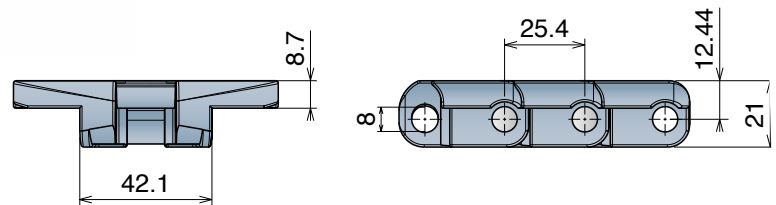

### Advantages:

- ▶ Heavy duty
- ▶ 20% Reduced gap link
- ▶ 95% Closed surface

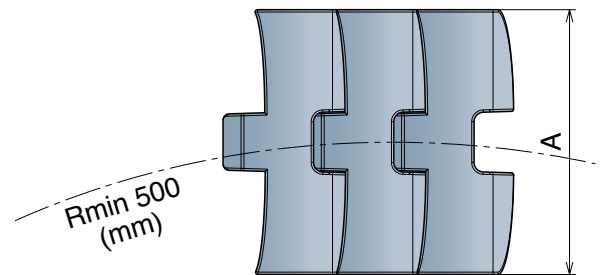

10 feet 3.048 m			
120 links	pg. 281-282	pg. 141-147	pg. 516->524

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
<b>11510103</b>	<b>LFA 260 M FT K330</b>	83,8	1,75	2000	500	<b>LFA</b>
<b>11510105</b>	<b>LFA 260 M FT K450</b>	114,3	2,30			
<b>11510303</b>	<b>MX 260 M FT K330</b>	83,8	1,75	1600	500	<b>MX</b>
<b>11510305</b>	<b>MX 260 M FT K450</b>	114,3	2,30			
<b>11513003</b>	<b>PFX 260 M FT K330</b>	83,8	1,65	1600	500	<b>PFX</b>
<b>11513005</b>	<b>PFX 260 M FT K450</b>	114,3	2,20			
<b>11511603</b>	<b>DKM 260 M FT K330</b>	83,8	1,75	2000	500	<b>DKM</b>
<b>11511605</b>	<b>DKM 260 M FT K450</b>	114,3	2,30			

## 260 M FG

Catena curvilinea  
Sideflexing belt/chain / Kurvengängige Mattenkette



**Magnetic System**

Delivery: **Easy** Standard

Pins: Ferritic SS

**25.4mm**  
PITCH

Metric Size

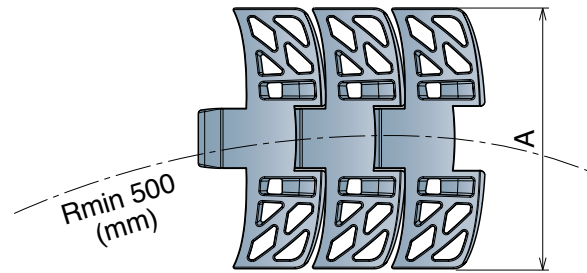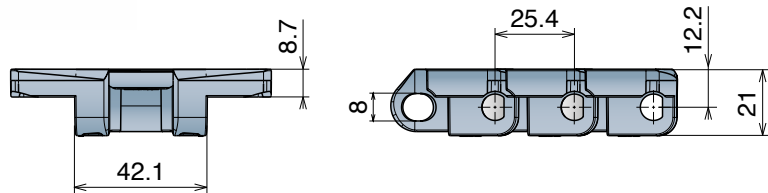

10 feet 3.048 m			
120 links	pg. 281-282	pg. 141-147	pg. 516->524

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
11540103	LFA 260 M FG K330	83,8	1,62	2000	500	LFA
11540105	LFA 260 M FG K450	114,3	2,13			
11540303	MX 260 M FG K330	83,8	1,62	1600	500	MX
11540305	MX 260 M FG K450	114,3	2,13			
11543003	PFX 260 M FG K330	83,8	1,52	1600	500	PFX
11543005	PFX 260 M FG K450	114,3	2,03			

# 260 TAB

Tappeti modulari / Modular belts / Mattenketten

## 260 TAB

Catena curvilinea  
Sideflexing belt/chain / Kurvengängige Mattenkette


**Tab System**

Delivery: **Easy** **Standard**

Pins: Ferritic SS

**25.4 mm**  
PITCH

Metric Size

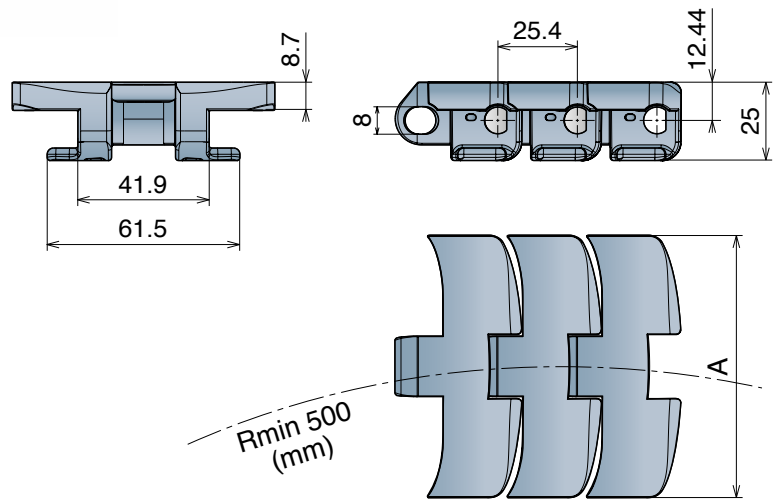

10 feet 3.048 m	pg. 281-282	pg. 163	pg. 516->524
120 links			

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
<b>11520103</b>	<b>LFA 260 TAB K330</b>	83,8	1,85	2000	500	<b>LFA</b>
<b>11520105</b>	<b>LFA 260 TAB K450</b>	114,3	2,00			
<b>11520303</b>	<b>MX 260 TAB K330</b>	83,8	1,85	1600	500	<b>MX</b>
<b>11520305</b>	<b>MX 260 TAB K450</b>	114,3	2,00			
<b>11521603</b>	<b>DKM 260 TAB K330</b>	83,8	1,85	2000	500	<b>DKM</b>
<b>11521605</b>	<b>DKM 260 TAB K450</b>	114,3	2,00			
<b>11523003</b>	<b>PFX 260 TAB K330</b>	83,8	1,75	1600	500	<b>PFX</b>
<b>11523005</b>	<b>PFX 260 TAB K450</b>	114,3	1,90			

Tappeti modulari / Modular belts / Mattenketten

## 261 M FT

Catena curvilinea  
Sideflexing belt/chain / Kurvengängige Mattenkette



**Magnetic System**

Delivery: **Easy** **Standard**

Pins: Ferritic SS

**25.4mm**  
PITCH

Metric Size

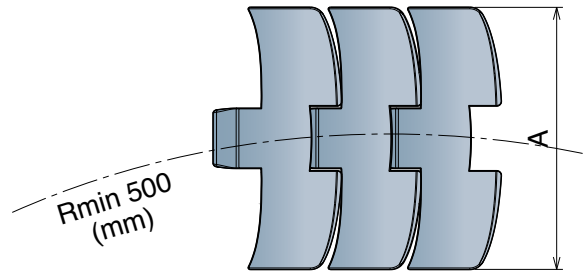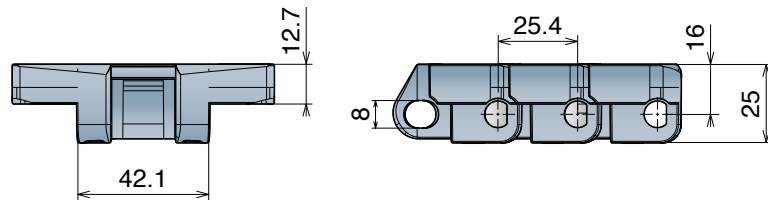

10 feet 3.048 m			
120 links	pg. 281-282	pg. 148-154	pg. 516->524

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
11530103	LFA 261 M FT K330	83,8	2,00	2000	500	LFA
11530105	LFA 261 M FT K450	114,3	2,52			
11530303	MX 261 M FT K330	83,8	2,00	1600	500	MX
11530305	MX 261 M FT K450	114,3	2,52			
11531603	DKM 261 M FT K330	83,8	2,00	2000	500	DKM
11531605	DKM 261 M FT K450	114,3	2,52			
11531703	MWX 261 M FT K330	83,8	2,16	2000	500	MWX
11531705	MWX 261 M FT K450	114,3	2,70			



# 261 TAB

Tappeti modulari / Modular belts / Mattenketten

## 261 TAB

Catena curvilinea  
Sideflexing belt/chain / Kurvengängige Mattenkette



**Tab System**

Delivery: **Easy** **Standard**

Pins: Ferritic SS

**25.4 mm**  
PITCH

Metric Size

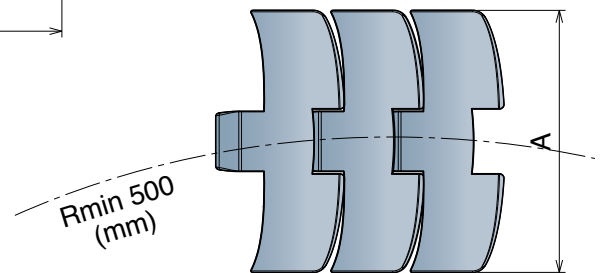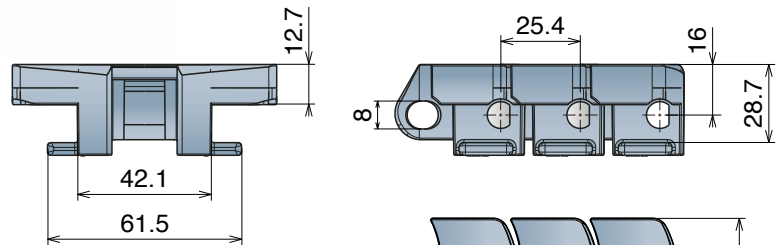

10 feet 3.048 m			
120 links	pg. 281-282	pg. 163	pg. 516->524

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
<b>11900103</b>	<b>LFA 261 TAB K330</b>	83,8	2,00	2000	500	<b>LFA</b>
<b>11900105</b>	<b>LFA 261 TAB K450</b>	114,3	2,52			
<b>11900303</b>	<b>MX 261 TAB K330</b>	83,8	2,00	1600	500	<b>MX</b>
<b>11900305</b>	<b>MX 261 TAB K450</b>	114,3	2,52			
<b>11901603</b>	<b>DKM 261 TAB K330</b>	83,8	2,00	2000	500	<b>DKM</b>
<b>11901605</b>	<b>DKM 261 TAB K450</b>	114,3	2,52			
<b>11901703</b>	<b>MWX 261 TAB K330</b>	83,8	2,16	2000	500	<b>MWX</b>
<b>11901705</b>	<b>MWX 261 TAB K450</b>	114,3	2,70			

Tappeti modulari / Modular belts / Mattenketten

2019

***Movex***<sup>®</sup>  
*Global Thinking, Local Acting.*

## WE CREATE SOLUTIONS

**Movex** designs and manufactures high quality components for the food, beverage, packaging, automotive and automation industries.

**Movex** meets your needs for standard and custom products in a dynamic and responsive way ensuring always the best performance.

### **Movex S.p.A.**

Via Industria, 22  
24060 Castelli Calepio (BG)

P +39 035 8359711  
F +39 035 4420873



[info@movexii.com](mailto:info@movexii.com)  
[movexii.com](http://movexii.com)

### **Movex around the world**

**Movex GmbH**  
P +49-6204-9375-0

**Movex Brasil Ltda**  
P +55-15-3141-2550

**Movex France**  
P +33-0640592049

**Movex AG India**  
P +91-120-4159660-62

**Movex Russia**  
P +7 (495) 925-88-56

**Movex UK Ltd.**  
P +44-77-20678442

**Movex Nederland**  
P +31-630-994850

**Movex USA Inc.**  
P +1-919-274-5477

**Movex SA de CV**  
P +52-1-3318458187

**Movex Ukraine**  
P +380-667507756